

Cim 147

SWIVEL AND HOSE UNION FOR Cim 34




This article was made in compliance with the quality management requirements of ISO 9001 standard. All articles are tested according to the EN 12266-1 standard. It can be used in water systems, for industrial and agricultural applications and generally with any non corrosive liquid.

It is guaranteed for 5 years.

It is made of a brass alloy that complies with standard EN 12165-CW617N-DW.


Nominal Pressure: PN 16
 Operating temperature: -10 to 90°C

PRESSURE TEMPERATURE RATINGS

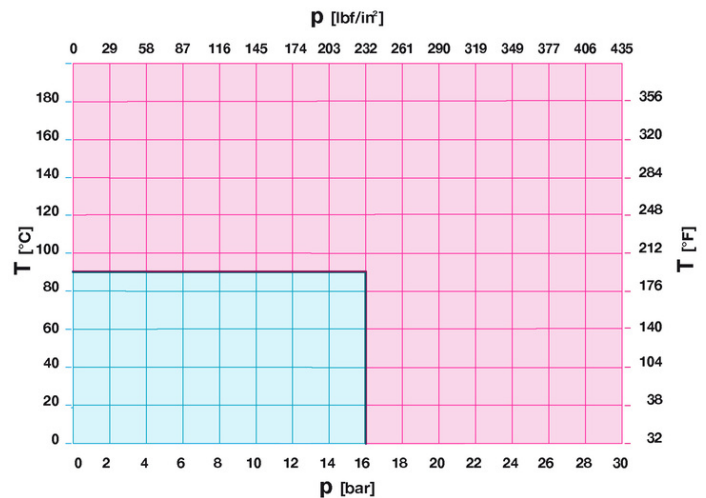

Notes:
 1 bar = 14,5 psi
 1 bar = 14,5 lbf/in²
 $^{\circ}\text{C} = 5/9 \times (^{\circ}\text{F} - 32)$
 $^{\circ}\text{F} = 32 + (9/5 \times ^{\circ}\text{C})$

TECHNICAL DRAWING

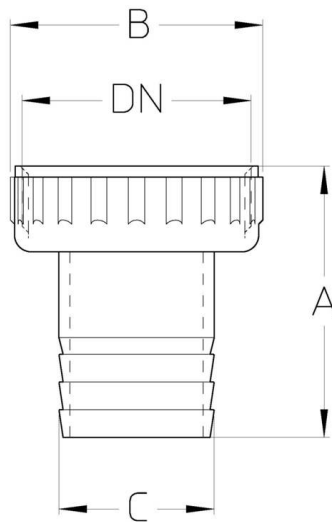

DN Cim 34	3/8"	1/2"	3/4"	1"
DN	1/2"	3/4"	1"	1"1/4
Grms.	35	35	50	100
A	32	36,5	34,5	44
B	24	30	36,5	45,5
C	14	16	22	28

Thread:
ISO 228

OUR CERTIFICATIONS

