



LOCINOX

vdbm
vandenbroucke metalen

Gate hardware
and access control
for professionals

Product Catalog

WHY LOCK

Everything for your gate

Gate closers	15
Tiger	19
Mammoth	20
Panther	22
Samson-2	23
Lion	24
Rhino	26
Verticlose-2	27
Serval	28
Caracal	29
Automation & Electronics	31
Magnus	36
Venus	37
Helios	40
Electromagnetic locks	47
Turnstiles	63
Locks	69
Keeps	109
Hinges	129
Drop bolts & Ground catchers	161
Gate catchers	171
Tools	175
Accessories	181
Marketing tools	215





INOX?

Innovation

A motivated team of engineers and prototypers works hard on a daily basis to further expand the Locinox range with new products.

Weatherproof

With stainless steel and non-ferro metals as raw materials for its products, combined with the best surface treatment, our products maintain high standards and have a longer life cycle than cheaper alternatives.

Industrial quality

Locinox products are tested extensively by our R&D Department in the most extreme circumstances, up to a minimum of 500,000 movements before bringing it to the market.

Ease of installation

Our products guarantee fast installation and very solid fixation. Thanks to the special tools, the patented Quick-Fix and the Plug & Play design - installation happens in a blink of an eye.

Loc-E-Shop

We continue to invest in our services and have turned our Loc-E-Shop into our most popular internal sales colleague, working 24/7 and processing nearly 90% of our orders every month. The Loc-E-Shop allows you to take full control of your orders at any time, wherever you are.

Modularity

The products in our range are designed for maximum interchangeability. A large number of combinations is possible to ensure maximum flexibility according to your clients' needs. Even after installation, our products can be easily adjusted and/or replaced.

At your service

Our sales team is easy to reach and promptly replies by phone or e-mail in 7 supported languages. They will supply the correct product information and are happy to help you in choosing the right solution for the given situation.

Custom assembly & packaging

The modularity of our products allows you to choose from many different configurations. Locinox will assemble every possible configuration upon request. Moreover, our logistics guarantee a shipment of our catalogue products within 24h after your order.

5 Years of premium Warranty

Enjoy 5 years of worry-free use on all our mechanical products. Go to locinoxusa.com/warranty and activate your additional 2 years warranty to enjoy 5 years of peace of mind. Because we care.

LATEST INNOVATION



Venus

Motorized gate closer for pedestrian swing gates

[p.37](#)



Magnus

Motorized hinge & gate closer in one for pedestrian gates

[p.35](#)

ONS



Unilec

Electric insert keep for insert locks

p.123

***“Challenging tradition with
the power of innovation”***

Every innovation starts with an idea or suggestion. We keep an eye on the latest developments in the market and our sales team listens to the challenges you face every day. With innovation in their DNA, our engineers gather every piece of information and get to work with our core values at heart: product quality, easy installation, reliability and flexibility.



Vera

Battery powered code lock for insert locks

p.101



Volta

Surface mounted lock with external battery powered keypad

p.76





3006C-B

3006R-B

3006PAD-H

3006C

3006B

3006D

Handles

A handful of new handle options

p.184



Helios


Architectural outdoor lighting

p.40

CONCEPT



- 1 HELIOS CONE55
- 2 VERA
+ FIFTYLOCK
+ 3006PAD-H
- 3 SFKU-V
- 4 B-SAFE
- 5 RHINO
- 6 GBMU4D16

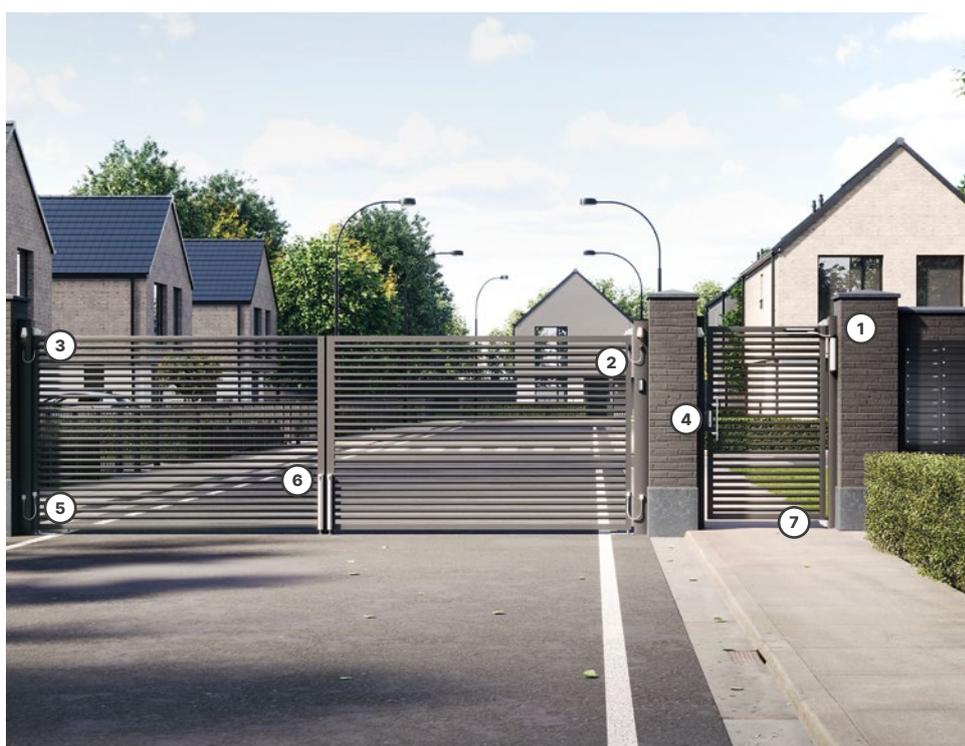

- 1 VERTICLOSE-2
- 2 U-SAFE
- 3 HELIOS CONE85
- 4 BAR-I-90
- 5 DVK
- 6 ELECTRADROP
+ SABO
- 7 BEARING HINGE



- 1 HELIOS CUBE55
- 2 FIFTYLOCK
 - + SFKU
 - + 3006PAD
- 3 B-SAFE
- 4 VSF & EGS
- 5 UNIWING
- 6 BOLTONHD-4D-



- 1 TURNITEC
- 2 VALENTINO
 - + SH-KLQF
- 3 VENUS-G
- 4 U-SAFE
- 5 GBMU4D16

LOGISTICS



24 hours

Thanks to a significant selection of products we have in stock, your order is guaranteed to be shipped within 24 hours of receipt.



Miniload

The miniload is the heart of our logistics at our Belgian HQ, with space for 90,000 bins. Thanks to a speed of 1,200 bins per hour, every product reaches the packaging line within 2 minutes.



Set assembly

This is where your all-in-one sets are assembled in durable, weatherproof boxes. From locks to drop bolts or customised configurations, each set includes everything you need for a quick and seamless installation

RESEARCH DEVELOPMENT



Product development

By following the latest market trends and listening to your daily challenges, our dedicated team of engineers gets to work. Guided by our core values—quality, reliability, flexibility, and easy installation—they develop innovative solutions designed to serve you better.



Test chamber

To guarantee top performance, we test every product in extreme conditions. From salt spray and climate simulation to load testing, we make sure they perform in every situation.



H &

MENT [HQ BELGIUM]



Prototyping

This is where your future solutions are brought to life. Our prototyping team works side by side with R&D, only separated by a glass wall, to develop a product that exceeds your expectation.



Gate closers

Hydraulic gate closers will transform any gate into a self-closing solution. Comfort, safety and peace of mind are guaranteed thanks to pure hydraulic power. High quality components ensure Locinox closers to be 100% weatherproof, maintenance-free and extremely durable. A constant and consistent functioning is guaranteed during an ice cold winter or a sweltering summer. The unique concept ensures an easy and efficient fixation thanks to the patented Quick-Fix system. Moreover, closing speed and final snap can be adjusted very precisely and 100% to your customers' wishes.

Cutting edge self-closing technology

A consistent closing speed

From freezing winter to sizzling summer. If your gate closes too slow, children or pets could sneak through. If your gate closes too fast, it might become a problem for wheelchair users. A loud slamming gate is not only annoying for you or your neighbors, it's also harmful for your gate.

The Active Thermal System, our own cutting-edge development, guarantees a constant closing speed, regardless of the outside temperature.

Adjust speed and final snap precisely

Some customers prefer their gate to close slowly, while others want it to go a little faster. No problem! All of our hydraulic gate closers can easily be adjusted in a matter of seconds to the wishes of your customers.

The final snap allows the gate to speed up a little at the end: this way, you are reassured the gate is properly closed. The final snap can easily be adjusted to any need.

Functions comfortably

The in-house developed High-Helix screws guarantee a consistent functionality and ensure a comfortable closing speed for the elderly or disabled.

Dust- & waterproof


Our gate closers are equipped with rotary seals. These seals protect the gate closers from dirt and dust particles intruding the mechanism, assuring your customers of worry-free functioning for many years to come.

Closes every time

The powerful torsion spring guarantees the necessary closing force. Therefore, your gate will always close: unaffected by strong winds, the width of your gate wing or the outside temperature. You can rest assured.

100% Protected



The aluminum housing guarantees full protection against any weather conditions. The housing is windproof, frostfree and dust- & waterproof, allowing your gate closer to function perfectly

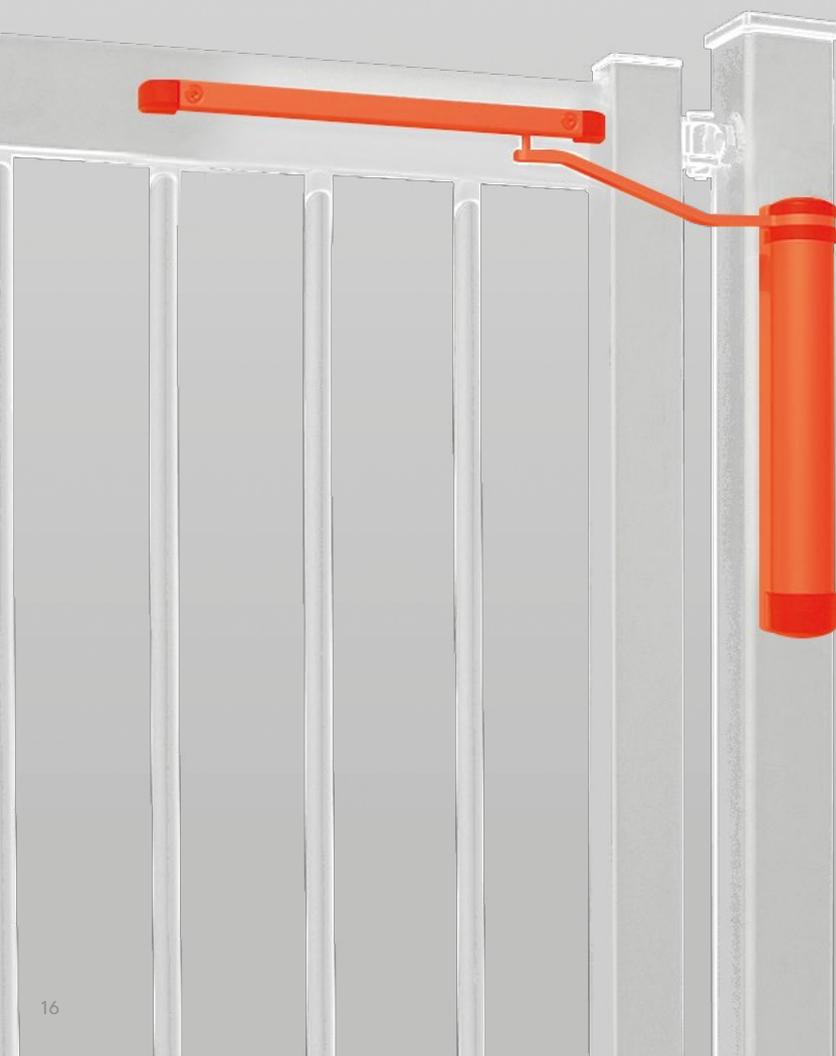

Find the perfect gate closer

GATE CLOSER & HINGE IN ONE

NEW FIT

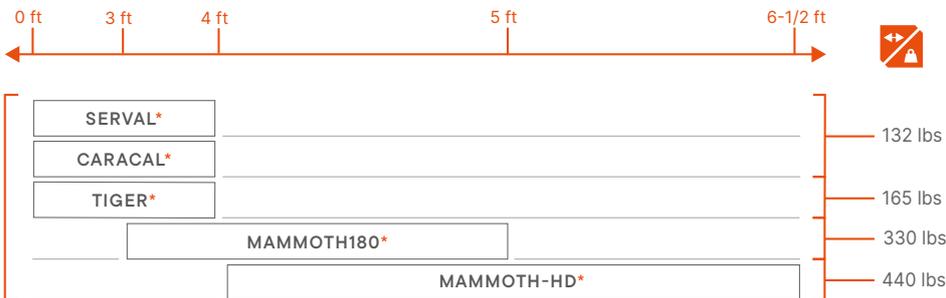


USE WITH EXISTING HINGES

RETRO FIT




OPENING ANGLE

ALL LOCINOX GATE CLOSERS




SAMSON-2



Max. 150° depending on position of hinge and gate closer

PANTHER




Depending on position of hinge and gate closer

*Fits chain link with optional brackets

Recommended gate width

Temperature resistance

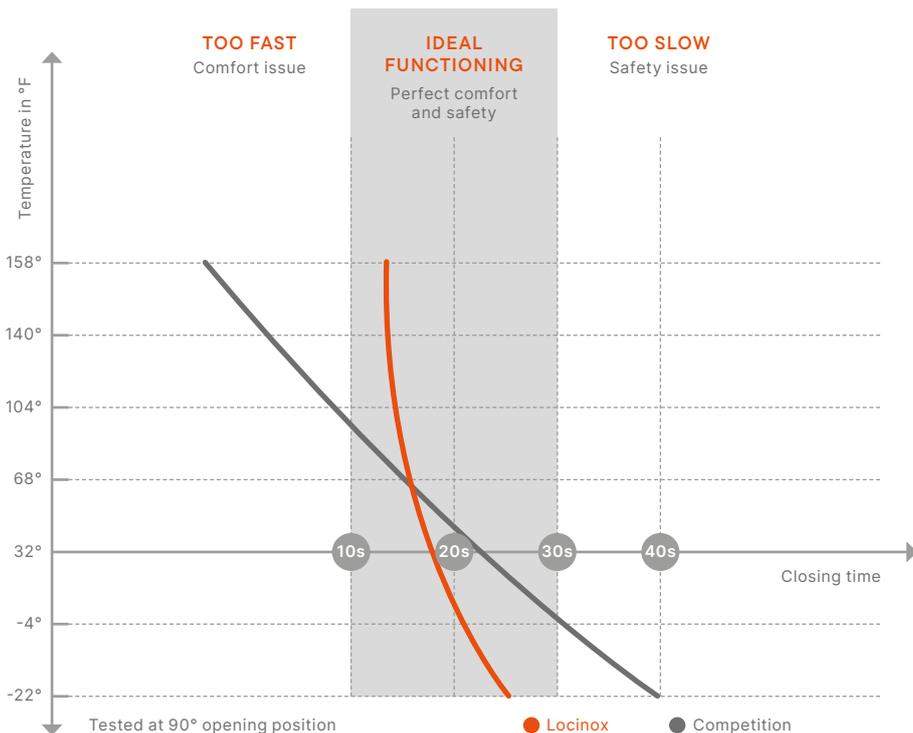

Locinox gate closers, why?



Safe for
wheelchair
users



Exceptional precise
adjustment of **speed &**
final snap for your **comfort**



Child & pet
friendly



Durable tested
for **500,000**
movements



Vandal
proof design



100% hydraulic
green &
maintenance free



A silent
opening & closing



Efficient **fast & easy**
installation



Extreme **weatherproof**
constant closing speed

TIGER (Patented)

Compact 180° hydraulic gate closer and hinge for gates up to 165 lbs

180° self-closing hydraulic hinge with precise adjustments on speed and final snap. The aluminum powder coated housing and unique high-tech components allow the Tiger to function perfectly in any weather situation. We highly recommend the Tigerdrill for an even more efficient installation. The Puma hinge is included.




4 FT
165 LBS
3 YEAR WARRANTY
500 K CYCLES
-22° to +158°
24h SHIPPING
QUICK-FIX
ROSPA
ADA
PMR

COLOR OPTIONS



SPECIFICATIONS

- 180° self-closing hinge with patented hydraulic damping
- Compact design with high quality components
- Weatherproof aluminum housing designed for exterior use
- Patented hydraulic damping - consistent closing speed, regardless of temperature
- For left and right turning gates
- Fast and easy fixation with Quick-Fix bolts
- Installation gap 7/16" up to 1" (5/8" adjustability)
- 3/4" vertical adjustability
- ADA compliant (< 5 lbs; max 16 Nm) from gate widths of 3ft. or more

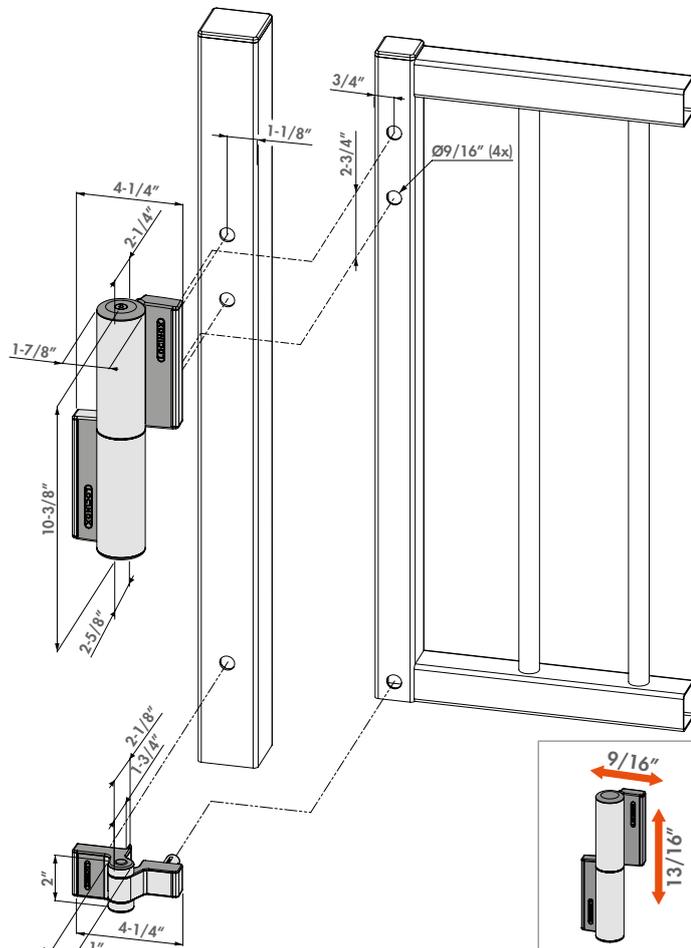

ORDER CODE

TIGER Hydraulic gate closer and Puma 180° hinge for gates up to 165 lbs **24h SHIPPING**

RECOMMENDED PRODUCTS



TIGERDRILL
P. 178



CLB-TIGER
P. 201

MAMMOTH180 (Patented)

Heavy duty 180° hydraulic gate closer and hinge for gates up to 330 lbs

Sleek and powerful self-closing hinge for 180° gate situations. The Mammoth is perfectly fit for gates up to 330 lbs. It is equipped with a double bearing for exceptional functionality. An Active Thermal System guarantees a constant closing speed, unaffected by weather conditions. The Dino hinge is included.



- 
 5 FT
MINIMUM
- 
 330
 LBS
- 
 3
 YEAR
 WARRANTY
- 
 500 K
 CYCLES
- 
 -22°
 +158°
- 
 QUICK-FIX
- 
 ADA
- 
 PMR
- 


24h
SHIPPING

COLOR OPTIONS



SPECIFICATIONS

- 180° self-closing double bearing hinge with adjustable closing speed and final snap
- Robust yet stylish design with high quality components
- Weatherproof aluminum housing designed for exterior use
- Consistent closing speed thanks to patented hydraulic damping
- ADA compliant (< 5 lbs; max 16 Nm) from gate widths of 3ft. or more
- Vandal and tamper proof
- For left and right handed gates
- Fast and easy installation with Quick-Fix
- Installation gap 9/16 min up to 1-3/8" max (ornamental); 9/16" adjustability in height

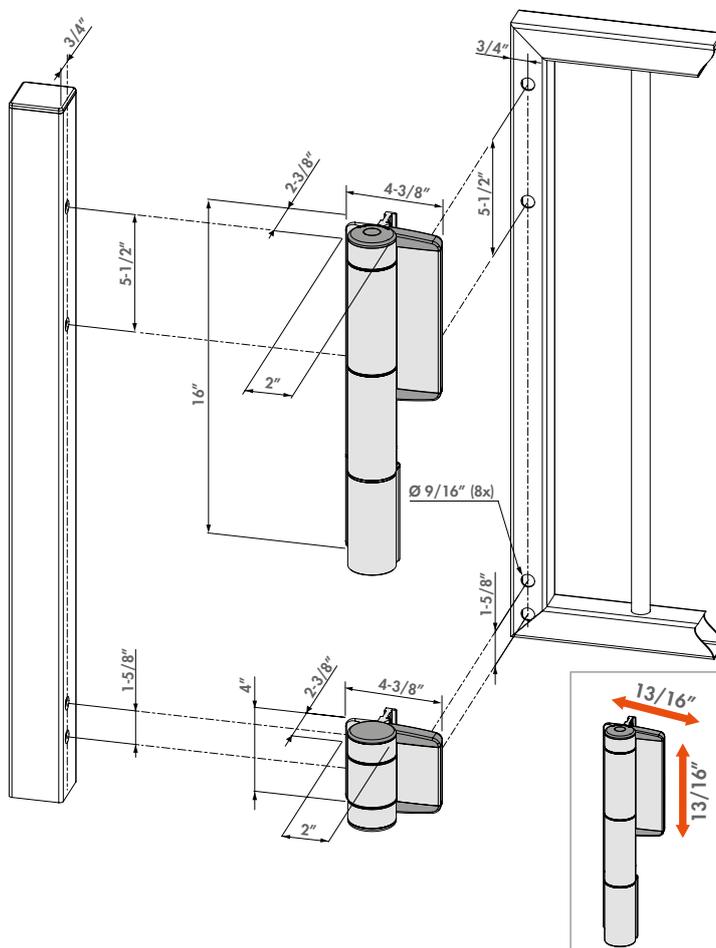

ORDER CODE

MAMMOTH180 Heavy-duty 180° hydraulic gate closer and hinge-in-one for gates up to 330 lbs **24h** SHIPPING

RECOMMENDED PRODUCTS



CLB-MAMMOTH
P. 201

MAMMOTH-HD (Patented)

Ultra heavy duty 180° hydraulic gate closer and hinge for gates up to 440 lbs

This heavy-duty gate closer and hinge-in-one is fit to close the heaviest gates. The combination of the hydraulically damped Mammoth with the powerful self-closing Raptor hinge is the perfect solution for closing gates weighing up to 440 lbs and 6-1/2 ft. wide. Both hinges are equipped with double bearings for extremely smooth functioning. The Active Thermal System guarantees a constant closing speed, unaffected by weather conditions. The Raptor hinge is included.



24h
SHIPPING

- 
6-1/2 FT
maximum
- 
440
LBS
- 
3
YEAR
WARRANTY
- 
500 K
CYCLES
- 
-22°
+158°

- 
QUICK-FIX
- 
ADA
- 
PMR

COLOR OPTIONS

SILV


24h
SHIPPING

9005

24h
SHIPPING

SPECIFICATIONS

- 180° self-closing double bearing hinge with adjustable closing speed and final snap
- Robust yet stylish design with high quality components
- Weatherproof aluminum housing designed for exterior use
- Consistent closing speed thanks to patented hydraulic damping
- ADA compliant (< 5 lbs; max 32 Nm) from gate widths of 4.4ft. or more
- Vandal and tamper proof
- For left and right handed gates
- Fast and easy installation with Quick-Fix
- Installation gap 9/16 min up to 1-3/8" max (ornamental); 9/16" adjustability in height

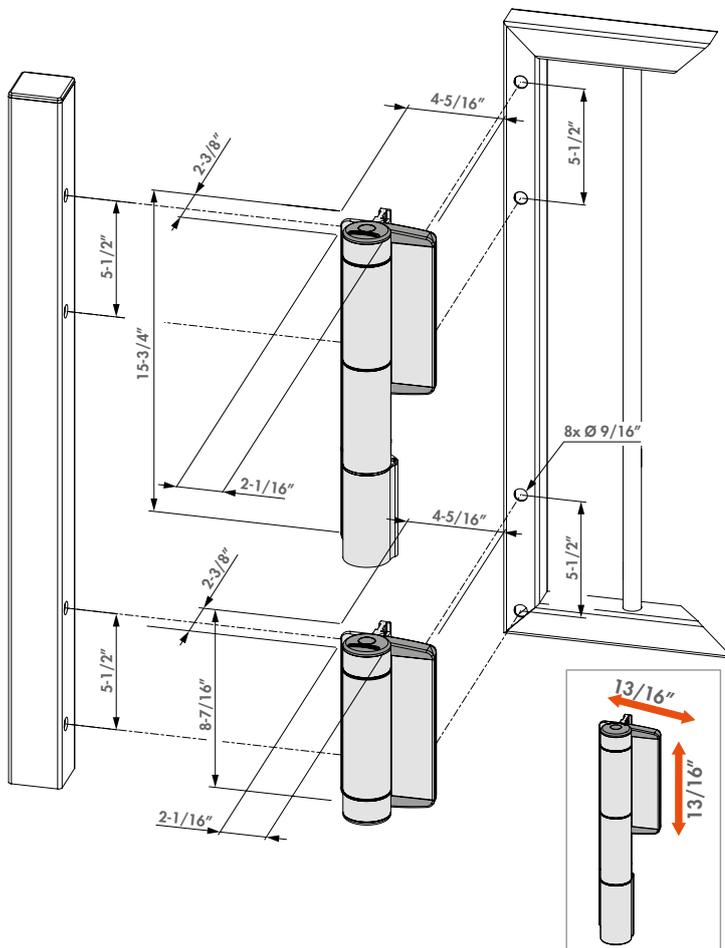

ORDER CODE

MAMMOTH-HD Heavy-duty 180° hydraulic gate closer and hinge-in-one for gates up to 440 lbs **24h** SHIPPING

PANTHER

All-round hydraulic gate closer for wall and post mounting

Versatile, easy-to-install and compact gate closer designed specially for wall and post situations. Panther is installed above the gate or between two pillars and can precisely be adjusted to anyone's wishes. The guaranteed closing force over the full 120° opening angle results in a worry free use, regardless of the weather conditions. The aesthetic and scratch free anodized housing ensures a very long life cycle.





COLOR OPTIONS



SPECIFICATIONS

- Gate closer for wall-mounting with adjustable closing speed and final action
- Consistent closing speed thanks to patented hydraulic damping
- Robust yet stylish design with high quality components
- Weatherproof, scratch resistant and corrosion free anodized aluminum housing
- Designed to be installed above the gate
- Integrated pretension for extremely smooth installation
- Closing force over the full 120° opening angle
- Recommended with Gatestop

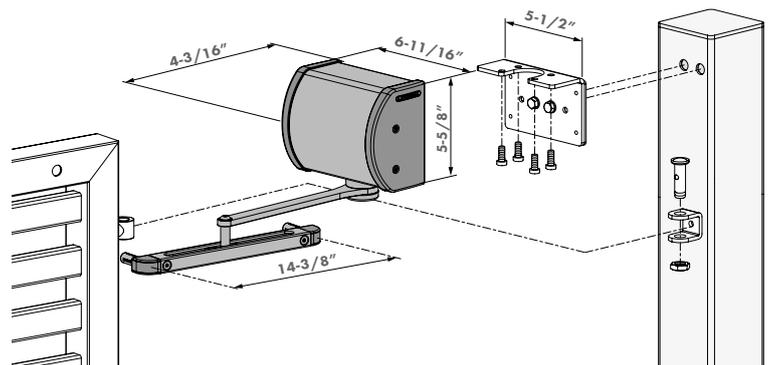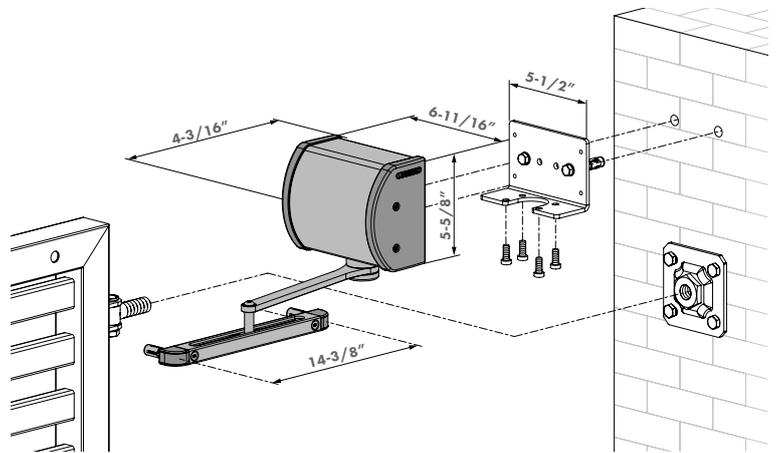

ORDER CODE

PANTHER All-round hydraulic gate closer for wall and post mounting, for gates up to 330 lbs 24h SHIPPING

RECOMMENDED PRODUCTS



GATESTOP
P. 210

1034ROLL-HDG
P. 138

RAIL-FIT
P. 202

SAMSON-2 (Patented)

Hydraulic retrofit gate closer for wide gates up to 330 lbs

Simple installation and versatility make it the perfect fit for larger gates. Samson-2 is a polyvalent hydraulic gate closer developed with high quality components for an exceptional long life span. Temperature changes do not affect the smooth and constant functionality. The set of mounting brackets that are delivered with the closer make Samson-2 fit for any gate. Also fitted for chain link fences.




COLOR OPTIONS



SPECIFICATIONS

- Hydraulic gate closer up to 150° with adjustable closing speed and final action
- Specially developed for outdoor use: industrial quality
- Weatherproof, scratch resistant and corrosion free anodized aluminum housing
- Consistent closing speed thanks to patented hydraulic damping
- Fast and easy fixation with Quick-Fix bolts
- For left and right turning gates
- ADA compliant (< 5 lbs; max 25 Nm) from gate widths of 4ft. or more

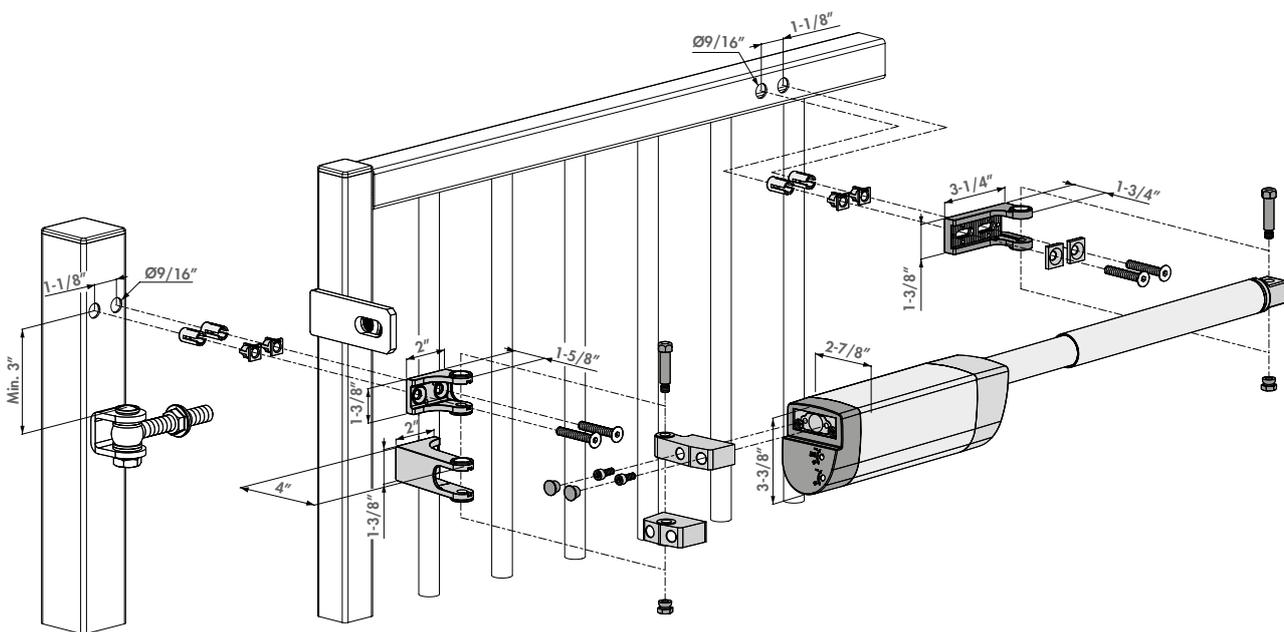

ORDER CODE

SAMSON-2 Hydraulic gate closer for gates up to 300 lbs **24h SHIPPING**

RECOMMENDED PRODUCTS



SB
P. 200

LION (Patented)

Compact 90° or 180° retrofit gate closer for gates up to 165 lbs

The attractive and compact Lion gate closer is unique in its kind. This hydraulic all-rounder is fit for every possible gate situation. Moreover, both 90° and 180° railsets are included in the package, allowing for more flexibility on site. The anodized aluminum housing combines a handsome look with a durable and spotless functioning for many years. Choose the Lion-VTC Drill for an even faster installation.




COLOR OPTIONS



SPECIFICATIONS

- 180° retrofit gate closer with adjustable closing speed and final action
- Railset included for 90° and 180° situations (depending on hinges used)
- Weatherproof, scratch resistant and corrosion free anodized aluminum housing
- Compact design with high quality components
- Consistent closing speed thanks to patented hydraulic damping
- For left and right handed gates
- Integrated pretension for extremely smooth installation
- ADA compliant (< 5 lbs; max 16 Nm) from gate widths of 3ft. or more

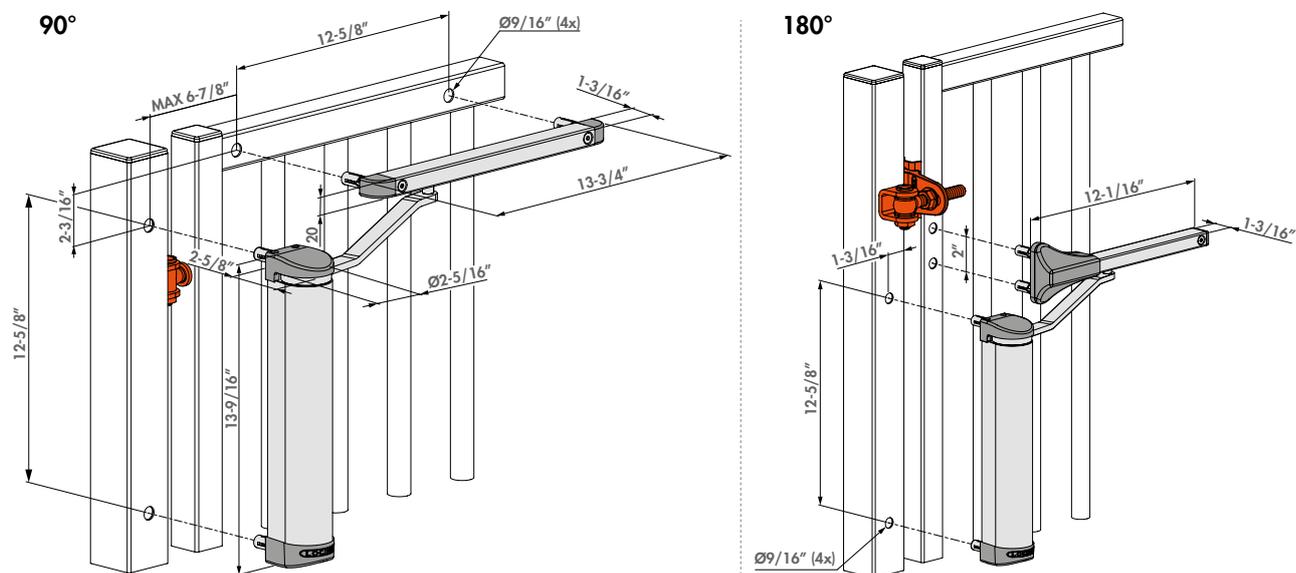

ORDER CODE

LION Compact hydraulic gate closer for any gate situation **24h SHIPPING**

RECOMMENDED PRODUCTS



LION-VTC-DRILL
P. 177



SHELL-LION
P. 198



3018LION
P. 198



RAIL-FIT
P. 202



RHINO (Patented)

Elegant 180° gate closer with direct connection to the hinge

Transform your 180° hinge into a self-closing solution thanks to our Rhino hydraulic gate closer. The direct connection to the Locinox hinge guarantees the discreet look and efficient transmission of the energy required to close the gate perfectly. The anodized aluminum housing ensures a durable and smooth operation in any weather. The Rhinodrill jig guarantees an extremely efficient installation.

- 5 FT
SHIPPING
- 330
LBS
- 3
YEAR
WARRANTY
- 500 K
CYCLES
- 22°
+158°
- 24h
SHIPPING
- QUICK-FIX
- ADA
- PMR
-


COLOR OPTIONS

SILV
24h
SHIPPING

9005
24h
SHIPPING

SPECIFICATIONS

- 180° self-closing double bearing hinge with adjustable closing speed and final snap
- Consistent closing speed thanks to patented hydraulic damping
- Weatherproof, scratch resistant and corrosion free anodized aluminum housing
- Fits 180° hinges M16 & M20 (GBMU, GBMU4D) & M16 (BOLTON4D)
- Bearing eyebolt is recommended (1034ROLL-M16)
- Integrated pretension for extremely smooth installation
- ADA compliant (< 5 lbs; max 20 Nm) from gate widths of 3ft. or more

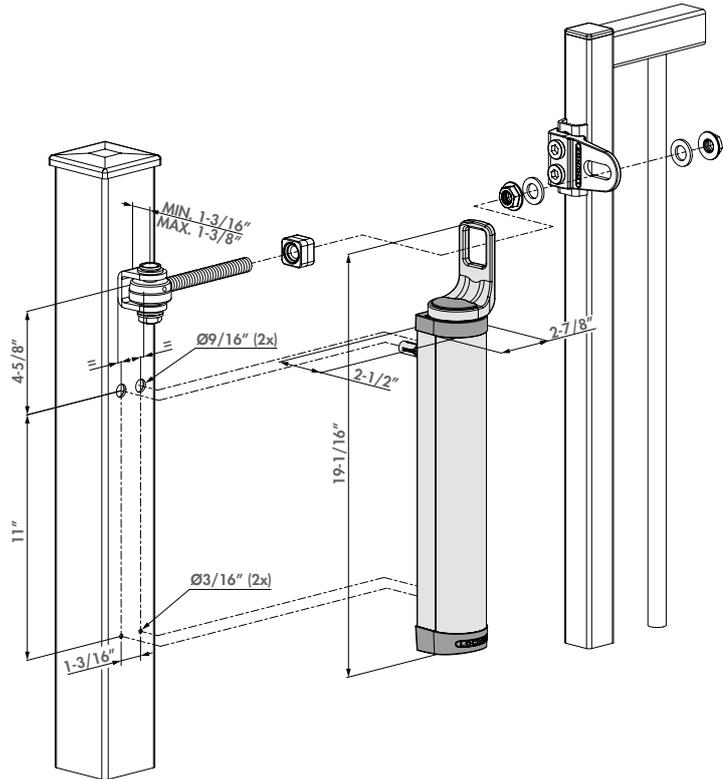

ORDER CODE

RHINO Hydraulic gate closer for gates up to 300 lbs 24h SHIPPING

RECOMMENDED PRODUCTS



RHINODRILL
P. 178



1034ROLL-HDG
P. 138



SHELL-RHINO-VTC
P. 199

VERTICLOSE-2-WALL (Patented)

90° or 180° hydraulic gate closer for wall-mounted gates up to 330 lbs

The Verticlose-2-Wall gate closer has been specifically designed for wall mounting where the gate closer itself is positioned at a 90° position in relation to the gate. The specially designed arm turns around the wall or post, ensuring a large opening angle. The aesthetic anodized aluminum gate closer with high-tech internal components ensures an exceptionally long life span.



24h
SHIPPING





COLOR OPTIONS



SPECIFICATIONS

- Gate closer for wall-mounting with adjustable closing speed and final action
- Specially designed arm for wall mounting while guaranteeing a big opening angle
- Weatherproof, scratch resistant and corrosion free anodized aluminum housing
- Robust yet stylish design with high quality components
- Integrated pre-tension for extra smooth installation
- Consistent closing speed thanks to patented hydraulic damping
- Firmly fixed thanks to patented Quick-Fix system
- ADA compliant (< 5 lbs; max 25 Nm) from gate widths of 4ft. or more

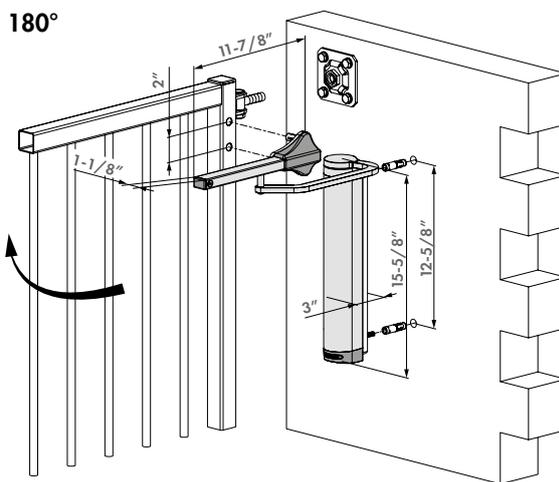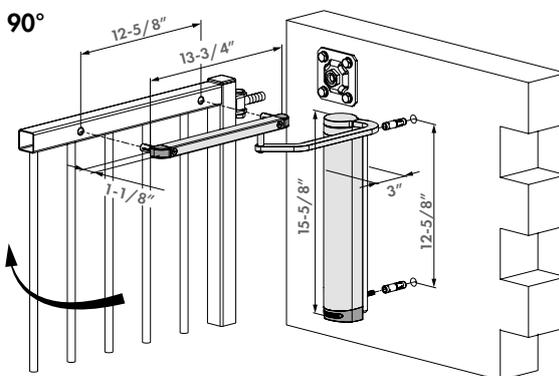

ORDER CODE

VERTICLOSE-2-WALL Powerful and all-round hydraulic gate closer for wall mounting **24h** SHIPPING

RECOMMENDED PRODUCTS



LION-VTC-DRILL
P. 177



SHELL-RHINO-VTC
P. 199



RAIL-FIT
P. 202

VERTICLOSE-2 (Patented)

Heavy duty 90° or 180° retrofit hydraulic gate closer for gates up to 330 lbs

The Verticlose-2 gate closer is top-of-the-range within the Verticlose product series. It is extremely multifunctional and possesses excellent features, which makes Verticlose-2 a perfect fit for both 90° and 180° hinge situations. The integrated pre-tension and continuous adjustability of speed and final snap, combined with our Quick-Fix mounting system, guarantee a quick and efficient installation. The aesthetic anodized aluminum gate closer with high-tech internal components ensures an exceptionally long life span. We highly recommend the Lion-VTC Drill for an even more efficient installation.



24h
SHIPPING





COLOR OPTIONS



SPECIFICATIONS

- Micro adjustment of speed and final snap
- Railset included for 90° and 180° situations (depending on hinges used)
- Weatherproof, scratch resistant and corrosion free anodized aluminum housing
- Robust yet stylish design with high quality components
- Integrated pre-tension for extra smooth installation
- Consistent closing speed thanks to patented hydraulic damping
- Firmly fixed thanks to patented Quick-Fix system
- ADA compliant (< 5 lbs; max 25 Nm) from gate widths of 4ft. or more

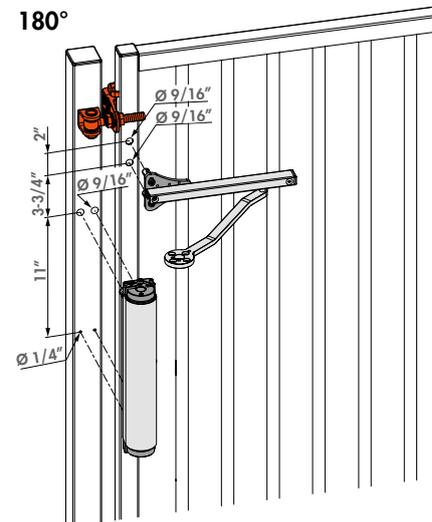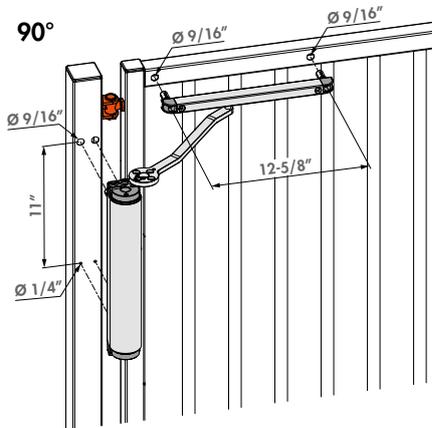

ORDER CODE

VERTICLOSE-2 Powerful and all-round hydraulic gate closer for 90° and 180° hinges **24h** SHIPPING

RECOMMENDED PRODUCTS



LION-VTC-DRILL
P. 177



SHELL-RHINO-VTC
P. 199



RAIL-FIT
P. 202

SERVAL

180° Spring hinge mounted with self-drilling screws


The Serval is a compact spring hinge with force adjustability. The fiberglass reinforced polyamide housing protects the high-tech internal components, allowing for perfect functionality in all weather conditions. Its 13/16" vertical and horizontal adjustability ensures an easy and flexible installation. Firmly fixed with self-drilling screws - no welding required. Suitable for installation on square and round frames.



4 FT
132 LBS
3 YEAR WARRANTY
500 K CYCLES
-22° to +140°
24h SHIPPING
SELF DRILLING
ROSPA
ADA
PMR

SPECIFICATIONS

- 180° spring hinge with force adjustability
- Fiberglass reinforced polyamide housing
- For left and right turning gates
- Fast and easy fixing with self-drilling screws
- Force adjustability from 2 up to 7 Nm (at closed position)
- Easy to open: Max. 10 Nm
- 13/16" horizontal and vertical adjustability
- Use of NOSTEP anti-climb device is recommended

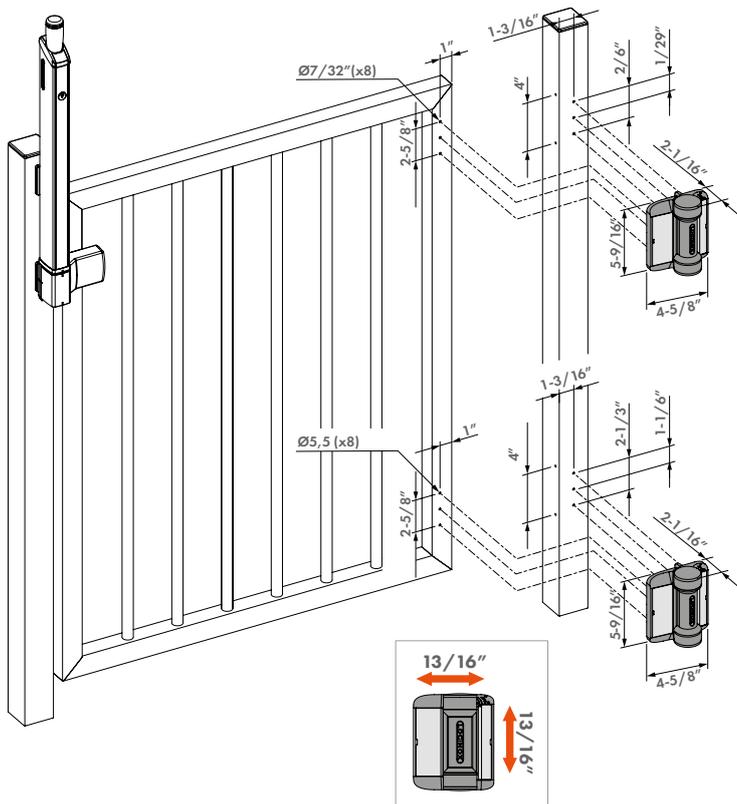

ORDER CODES

- SERVAL-SD-R 180° Spring hinge mounted with self-drilling screws for round profiles **24h SHIPPING**
- SERVAL-SD-K 180° Spring hinge mounted with self-drilling screws for square profiles **24h SHIPPING**

RECOMMENDED PRODUCTS



FORTIMA
P. 86



GUARDIMA
P. 87



CARACAL
P. 29



NOSTEP
P. 203

CARACAL (Patented)

Hydraulic 180° gate closer and hinge




Aesthetic 180° gate closer with adjustable closing speed. The glassfibre reinforced PA housing protects the high-tech internal components, allowing for a perfect functioning in all weather circumstances. Its 13/16" vertical and horizontal adjustability ensures an easy and flexible installation. Firmly fixed with self-drilling screws - no welding required. Suitable for installation on square and round frames. Caracal is a perfect fit for swimming pools, playgrounds, parks and garden gates. Including Serval self closing hinge.

24h
SHIPPING

- 
4 FT
- 
132 LBS
- 
3 YEAR WARRANTY
- 
500 K CYCLES
- 
-22°
+140°
- 
SELF DRILLING
- 
ROSPA
- 
ADA
- 
PMR

SPECIFICATIONS

- Automatic 180° closure with adjustable closing speed
- Fiberglass reinforced PA housing
- Patented hydraulic damping - consistent closing speed, regardless of temperature
- For left and right turning gates
- Fast and easy fixing with self-drilling screws
- 13/16" horizontal and vertical adjustability
- Easy to open: Max. 11 Nm
- For installation on round frame: CLB-CARACAL to be ordered additionally

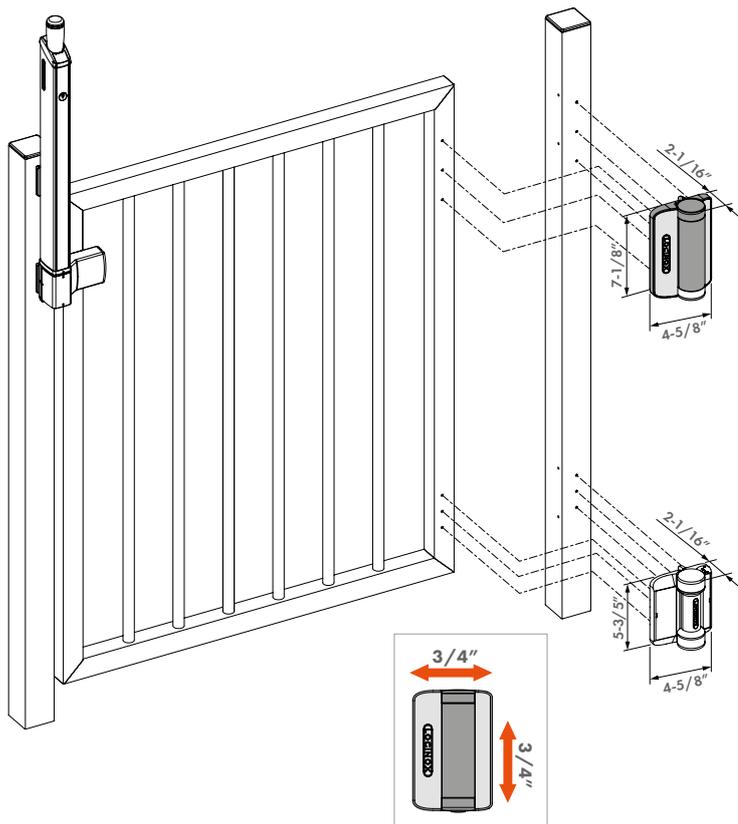

ORDER CODE

CARACAL-SD-K Hydraulic 180° gate closer and hinge mounted with self-drilling screws for square profiles **24h** SHIPPING


RECOMMENDED PRODUCTS



FORTIMA
P. 86



GUARDIMA
P. 87



CLB-CARACAL
P. 201



NOSTEP
P. 203






Automation & electronics

Automation has become a fundamental factor in the fence & gate industry. Locinox offers a wide range of solutions to manufacture user-friendly smart gates.

Motorized gate closers

For pedestrian swing gates

Motorized gate closers combine power and precision with smart technology, specifically designed for outdoor pedestrian gates. They ensure maximum safety by always closing, no matter the weather conditions, and offer comfort for all users. Innovative features like push & go technology and integration with access control provide added convenience and security. A reliable and modern solution for every situation.

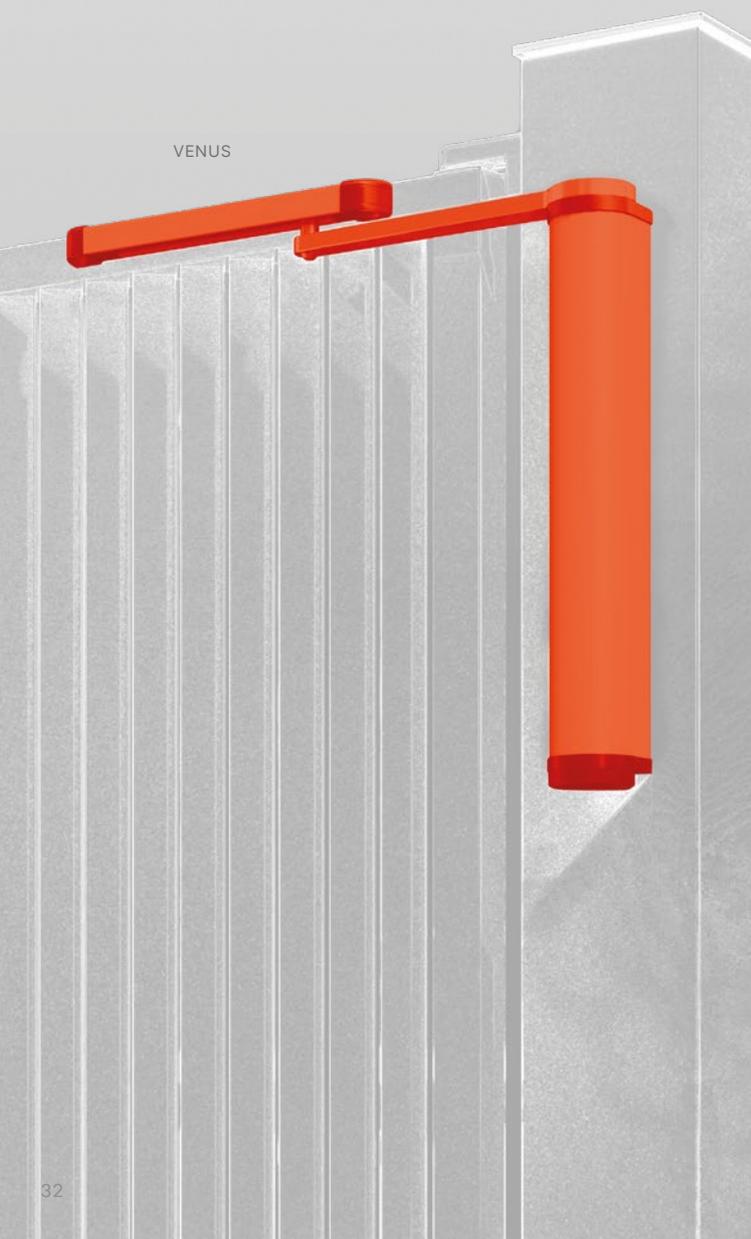

Smooth and quick access

The push-and-go feature ensures that you already activate the gate opener with a gentle push. The gate automatically opens on its own and closes automatically afterwards. Handy if your hands are full or can't exert as much force.

Comfort for all

Are you approaching the gate in a wheelchair, pushing a bike or carrying heavy shopping bags? Thanks to the pre determined waiting and closing times set by the installer as desired, the gate closer takes these situations into account.

Safety above all

Thanks to its integrated obstacle detection feature, the gate closer will reopen the gate and ensure it is fully closed only when everything and everyone has safely passed through.



MAGNUS

Easy Installation

Drill a few holes to mount with Quick-Fix and connect the plug-and-play wiring, and the gate closer is ready to go.

Brushless

The brushless motor operates quietly and smoothly, with minimal friction and wear. This guarantees a long lifespan, even under intensive and unpredictable use.

Reversible

The reversible motor allows for easy manual intervention even during automatic opening or closing. This prevents blockage or damage and ensures smooth operation.

Easy configuration


An intuitive application will guide you through the installation process, providing step-by-step instructions.

All-in-one

All the components, including the revolutionary steel gearbox, motor and motor control and all electronics, are enclosed within a compact aluminium housing.

Vandal proof

The motor's high backdrivability protects the electronics against any physical impact. Moreover, the WiFi connection can only be accessed after opening the case with your own key.

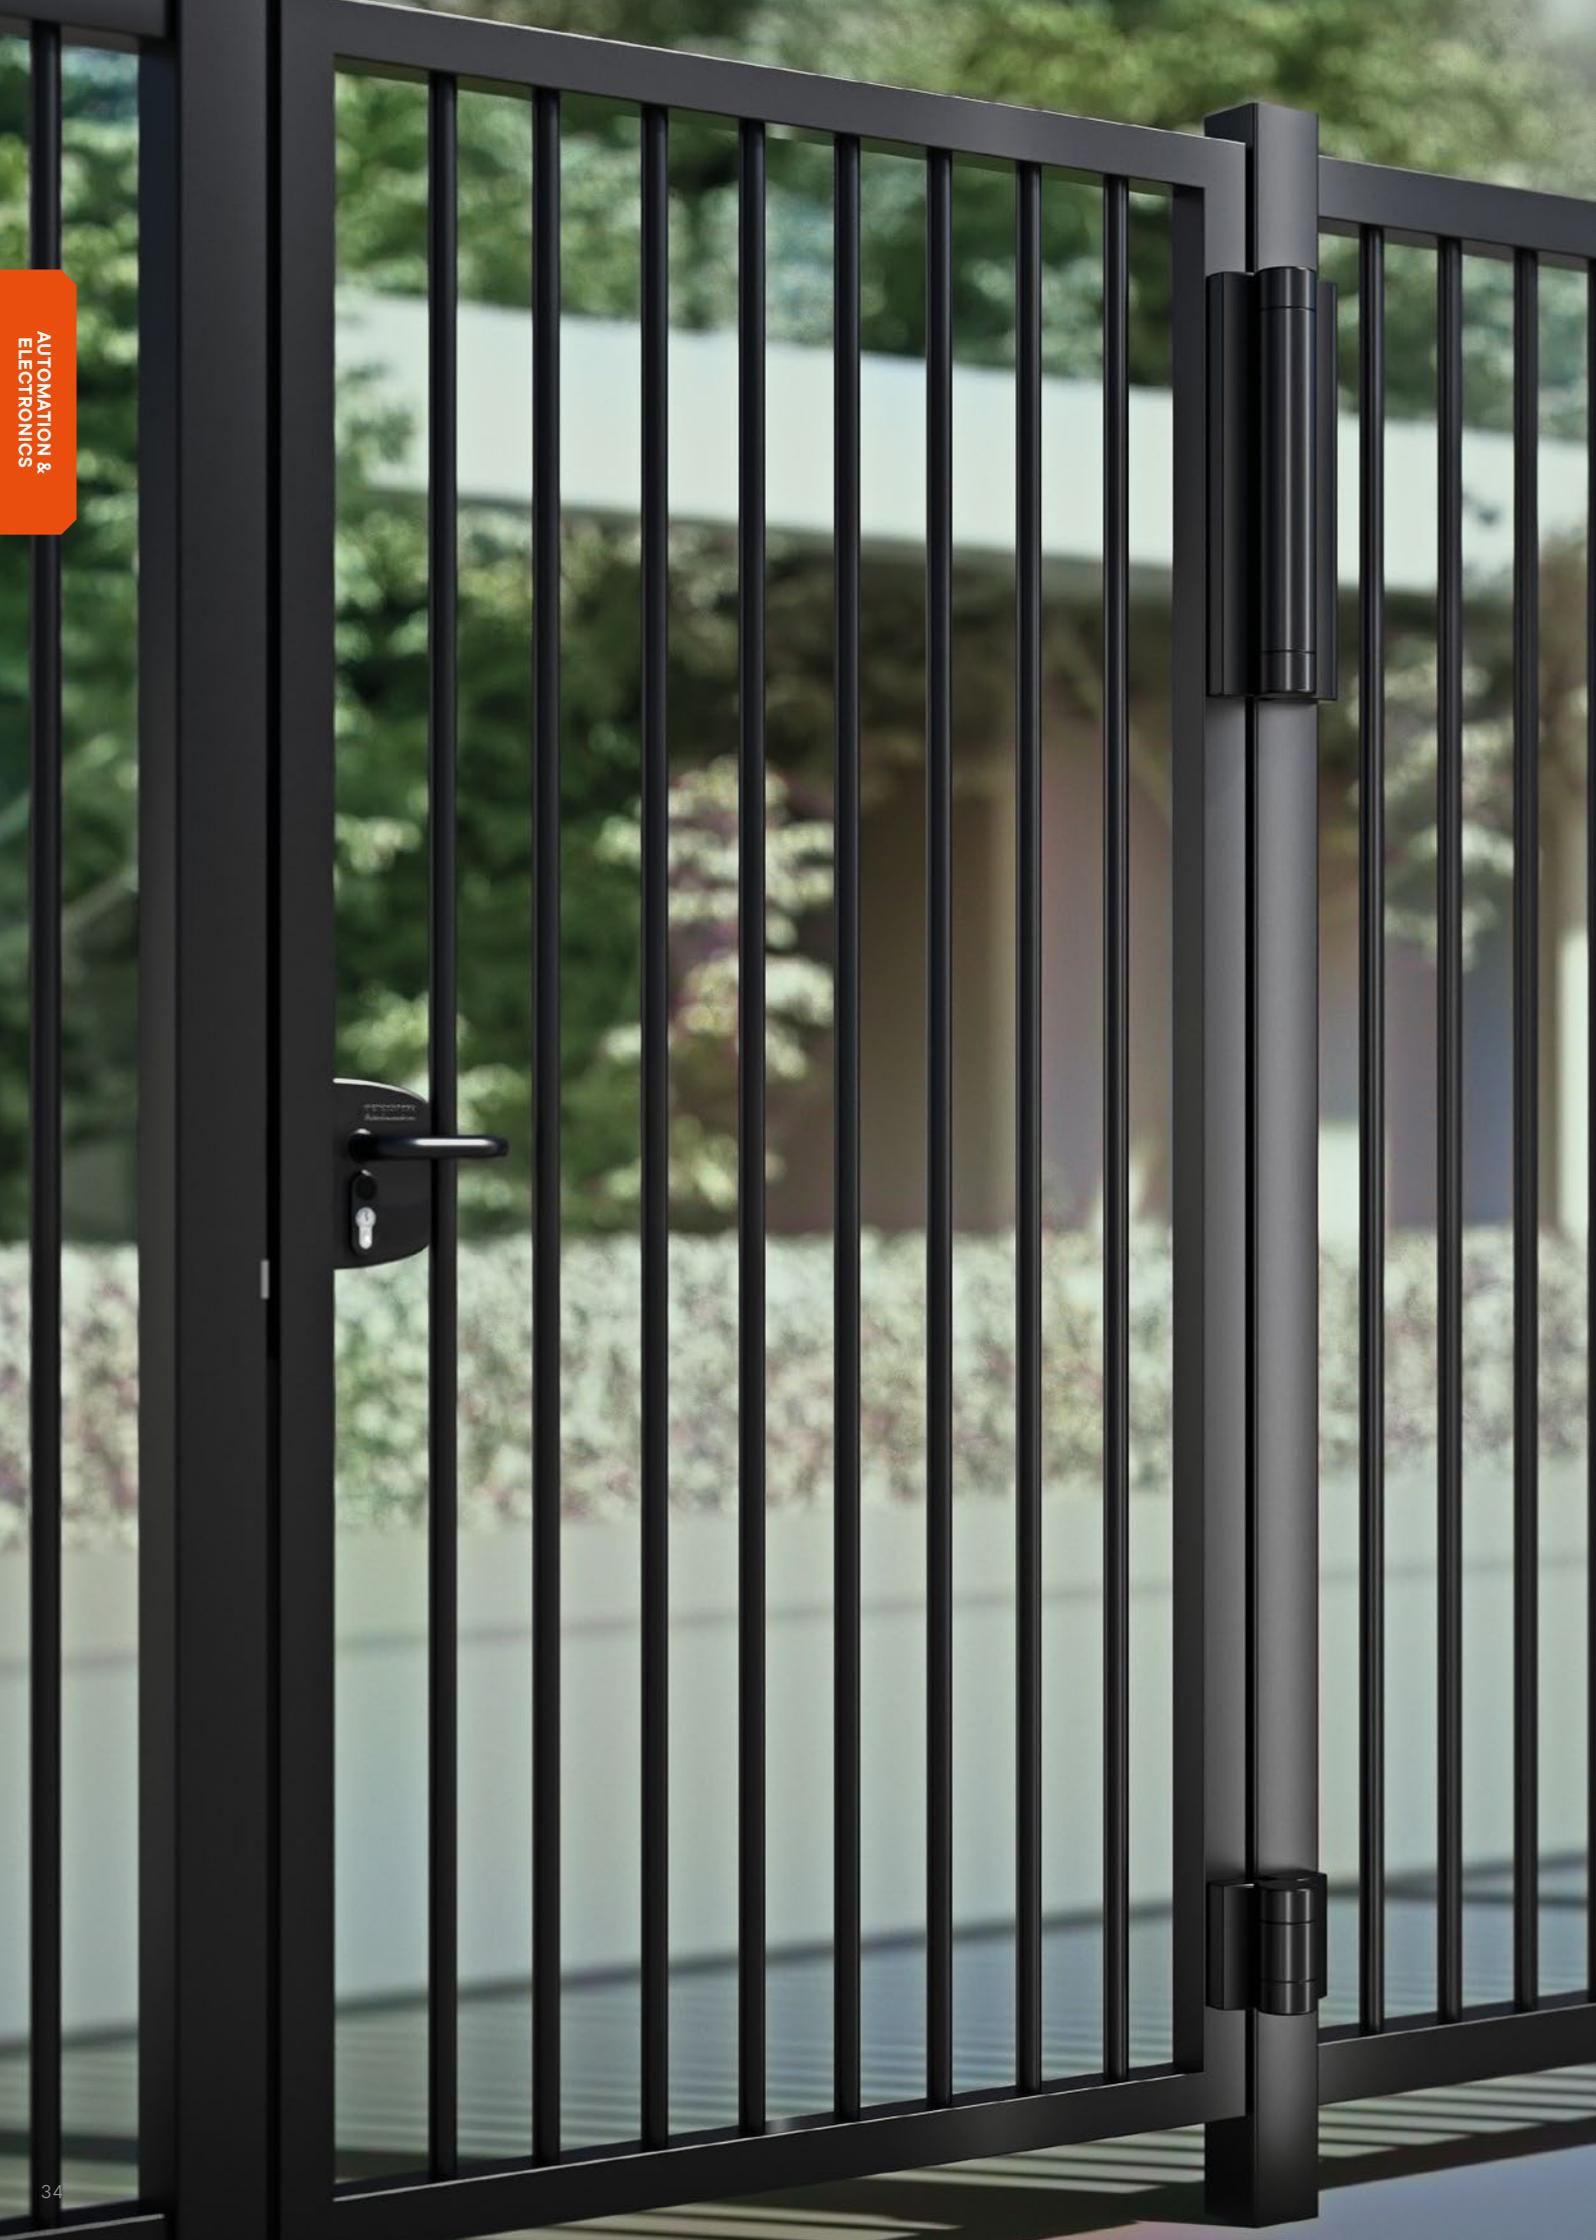

NEW **MAGNUS** (Patent pending)

Motorized hinge & gate closer in one for pedestrian gates

Coming Soon. MAGNUS is a motorised hinge and gate closer in one, designed for the automation of pedestrian gates. The brushless and reversible motor is insensitive to unpredictable pedestrian behaviour, and operates in low-energy mode. The settings and access control can be configured via an intuitive app. Includes lower hinge and compact connection box.




COLOR OPTIONS



SPECIFICATIONS

- Motorized gate closer with integrated electronics
- 75 Nm torque
- Fits on post profiles from 2 3/8" and gate profiles from 1 9/16"
- Steel gear box
- Anodized aluminium cover
- Fast and easy fixation with Quick-Fix bolts
- Conforms to UL/cUL 325 standard for automatic operators, tested by ETL
- Input main power supply: 110V AC to 240V AC
- Motor voltage: 24V DC
- External connection box with 3 inputs and 3 outputs (Max. 48W, 24V DC)
- Automated obstacle detection with reverse function
- Brushless motor: long lifespan and intensive usage
- Reversible motor with backdrivability for easy manual use - to be combined with a lock
- 6-1/2ft cable between motor and connection module
- Compact and vandal-proof design
- Configuration via app
- Tested up to 500 000 cycles
- EN 16005 Compliant

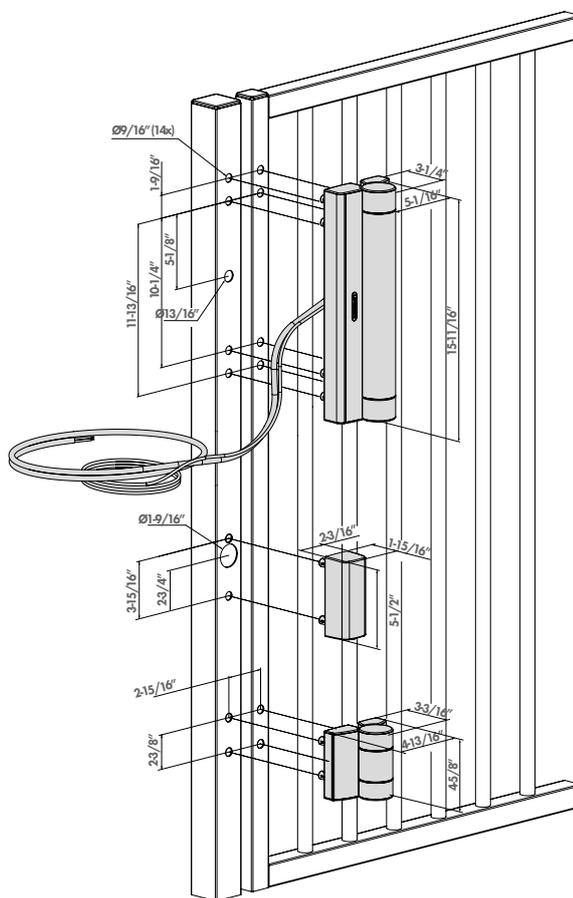

ORDER CODE

MAGNUS Motorized gate closer & hinge in one for pedestrian gates **24h SHIPPING**

RECOMMENDED PRODUCTS



SLIMSTONE-2
P. 38



MODULEC-SA
P. 112



MODULEC-SF
P. 124



MAGMAG
P. 48



VENUS-ARM-S


Sliding arm to install Venus

Accessory to install the Venus with any type of hinge.

24h
SHIPPING

SPECIFICATIONS

- Compatible with Venus
- Available in two colors: RAL 9005 & SILV

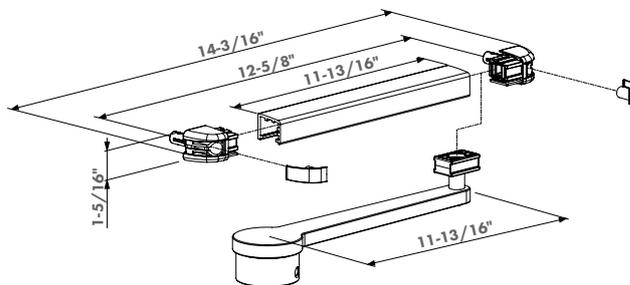

ORDER CODE

VENUS-ARM-S Sliding arm to install Venus **24h** SHIPPING



VENUS-ARM-A


Articulated arm for Venus installation

Accessory to install the Venus in situations with distances up to 9 13/16" inches between the motor and hinge axes.

24h
SHIPPING

SPECIFICATIONS

- Compatible with Venus
- Available in two colors: RAL 9005 & SILV

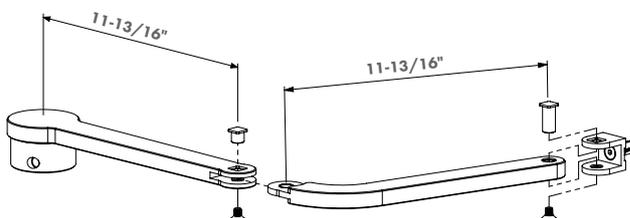

ORDER CODE

VENUS-ARM-A Articulated arm for Venus installation **24h** SHIPPING



VENUS-ARM-G


Arm to install Venus with 180° hinges

Accessory to install the Venus with 180° hinges. Compact design that supports large opening angles.

24h
SHIPPING

SPECIFICATIONS

- Compatible with Venus
- Available in two colors: RAL 9005 & SILV

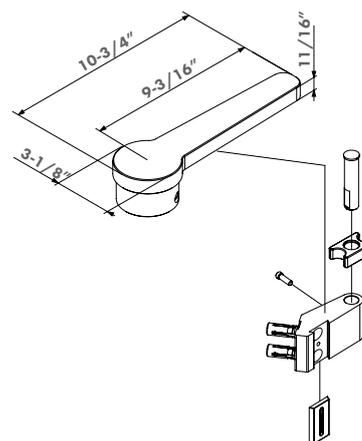

ORDER CODE

VENUS-ARM-G Arm to install Venus with 180° hinges **24h** SHIPPING



VENUS (Patent pending)

Motorized gate closer for pedestrian swing gates

The Venus is a plug-and-play motorized gate closer for pedestrian swing gates. The compact all-in-one gate operator can easily be installed on any type of post and hinge thanks to 3 different arm types.

The innovative motor's performance remains unaffected by manual force. When combined with access control, the Venus also works as a low-energy gate opener.

1400 MM
4.6 FT

100 KG
220 LBS

2
YEAR
WARRANTY

-22°
+158°

QUICK-FIX

24h
SHIPPING

24V
DC

IP
54


SELF-CLOSING
GATE

COLOR OPTIONS



SPECIFICATIONS

- Motorized gate closer with integrated electronics
- 150 Nm torque
- Fits on 3 2/16" profiles
- For pedestrian gates up to 4.6 ft wide and 220 lbs
- Steel gear box
- Anodized aluminium cover
- 3 different arm options for installation
- Fast and easy installation with Quick-Fix
- Conforms to UL/cUL 325 standard for automatic operators, tested by ETL
- Input main power supply: 110V AC to 240V AC
- 3 inputs and 3 outputs (Max. 48W, 24V DC)
- Integrated warning light
- Automated obstacle detection with reverse function
- Brushless motor: long lifespan and intensive usage
- Reversible motor with backdrivability for easy manual use - to be combined with a lock
- Compact and vandal-proof design
- EN 16005 Compliant
- Configuration via app
- Tested up to 500 000 cycles

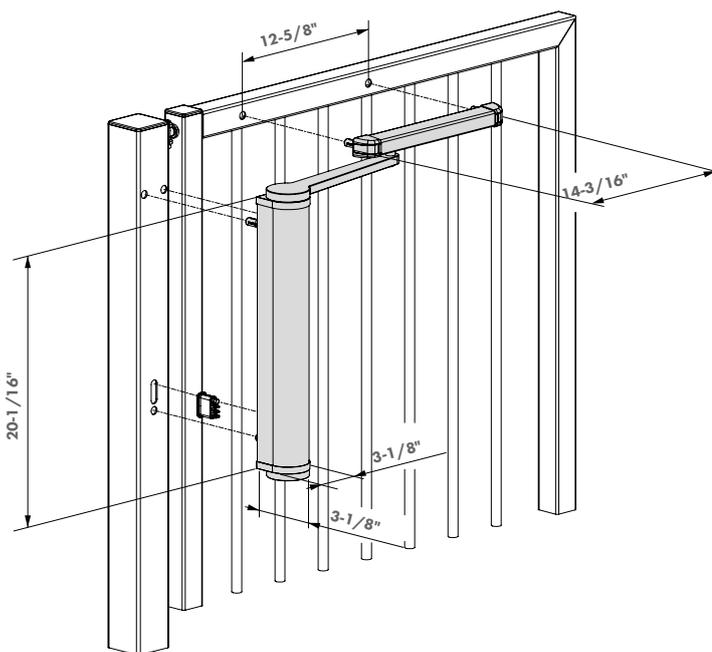

ORDER CODES

VENUS-S	Motorized gate closer with articulated arm for pedestrian swing gates 24h SHIPPING
VENUS-A	Motorized gate closer with compact arm for pedestrian swing gates with 180° hinges 24h SHIPPING
VENUS-G	Motorized gate closer with sliding arm for pedestrian swing gates 24h SHIPPING

COMPATIBLE PRODUCTS



SLIMSTONE-2
P. 38



MODULEC-SF
P. 124



B-MAG
P. 53



VENUS-ADAPTERPLATE
P. 197




24h
SHIPPING

SLIMSTONE-X

Weather resistant keypad with external relays

The durable and robust SlimStone-X keypad has been developed to work with the SwitchStone-STD. When both combined, the SlimStone-X ensures maximum security against burglary thanks to 2 external relays, both with a common, Fail Open and Fail Close contact. The keypad is easy in installation and configuration, and is developed and tested for use in the most extreme weather conditions (IP68).

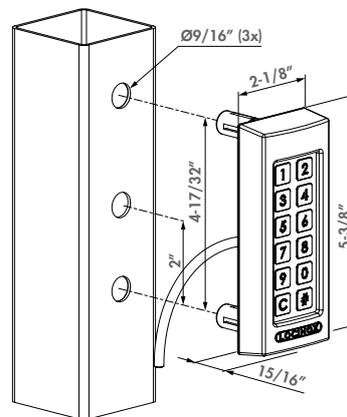

COLOR OPTIONS



SPECIFICATIONS

- IP68 rated - Extremely resistant to water and dust
- Long range secure 2-wire communication with SwitchStone-STD, distance up to 330 yards
- Auto back up functionality
- External relay offers additional protection
- Highly resistant stainless steel push buttons tested for 1,000,000 pushes and more
- Easy programming of up to 400 user codes
- Smart heating element guarantees frost-free use
- Tested from -22°F to 185°F
- Consumption: 1,5 W (> 41°F) + 12 W at max heating (< -13°F)

COMPATIBLE PRODUCTS



SWITCHSTONE-STD
P. 61

MODULEC-SA
P. 112

INTRALEC
P. 124

LIQU2
P. 81

ORDER CODE

SLIMSTONE-X Strong, frost-free and watertight keypad **24h** SHIPPING




24h
SHIPPING

SLIMSTONE-2

Weather resistant keypad with 2 integrated relays

The SlimStone-2 keypad has 2 integrated relays, with a Fail Open and Fail Close contact. These make it easy to connect to Locinox and third-party automation products. This keypad with integrated LED lighting is strong and extremely weather resistant, thanks to integrated heating and IP68 waterproof rating.

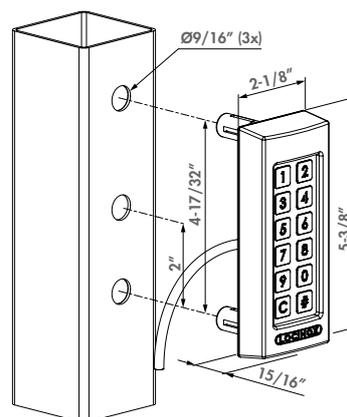

COLOR OPTIONS



SPECIFICATIONS

- IP68 rated - Extremely resistant to water and dust
- Aluminum vandal-proof housing with scratch-resistant textured lacquer
- Highly resistant stainless steel push buttons tested for 1,000,000 pushes and more
- Easy installation and configuration
- Easy programming of up to 100 user codes
- Voltage: 10 up to 26 V AC/DC
- Current: 1.0 A (with heating)
- 2 integrated switching relays: 2 x NO - 2 x NC - 2 x COM (Max. 2A, 60W, 26V AC/DC)
- Consumption: 1,5 W (> 41°F) + 12 W at max heating (< -13°F)

COMPATIBLE PRODUCTS



MODULEC-SA
P. 112

INTRALEC
P. 124

LIQU2
P. 81

B-MAG
P. 53

ORDER CODE

SLIMSTONE-2 Sturdy, frost-free and weather resistant keypad with 2 integrated relays **24h** SHIPPING



HELIOS architectural outdoor lighting

Perfect harmony between functionality and aesthetics

CONE



CUBE



ARCO



HEPTA



With a complete range of 7 different models, you can design the outdoor space entirely according to your preferences.

Choose from the standard colors of **black, silver, anthracite and bronze** or **paint the lights in any color of your choice.**

TIP

- Coat the housing together with the gate for a stunning result.

NEW **CONE** (Patent pending)

Architectural conical wall lighting



Upgrade your gate installations and surrounding areas with a warm and atmospheric touch with this conical wall lighting from the HELIOS portfolio. The high-quality aluminum housing guarantees durability in all weather conditions. Choose from different standard colors or personalize the uncolored variant with any powder coating of your choice. These lights are available in 2-3/16" or 3-3/8" widths and 12-24V DC connection, ideally combined with POWERSTONE.




COLOR OPTIONS

- ALUM
- SILV
- 9005
- 7016
- BRON

SPECIFICATIONS

- Available in various colors or customizable via powder coating
- Width: 2-3/16" or 3-3/8"
- Color temperature: 2700K
- IP65
- Power consumption: max. 3W (12-24V DC)
- Plug & play installation with WAGO connectors
- Lifetime: 50,000 hours while maintaining 80% of initial brightness
- Easy installation with standard tools and supplied Hex keys
- Brightness: 300 lm

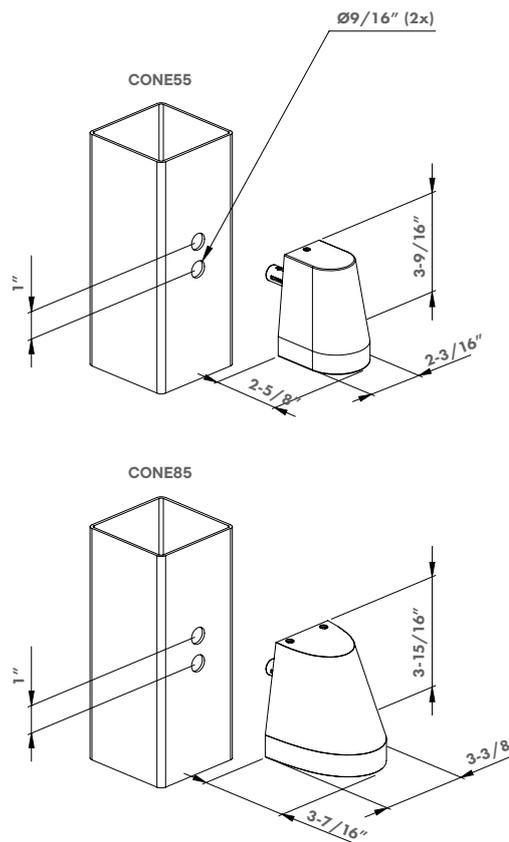

ORDER CODES

CONE55-230V	2-3/16" mm wide, 230V AC
CONE55-DC	2-3/16" mm wide, 12V DC / 24V DC
CONE85-230V	3-3/8" mm wide, 230V AC
CONE85-DC	3-3/8" mm wide, 12V DC / 24V DC

RECOMMENDED POWER SUPPLIES



POWERSTONE
P. 60



DC-POWER-12V-20W
P. 61



DC-POWER-24V-25W
P. 61

NEW **CUBE** (Patent pending)

Architectural cubic wall lighting



Upgrade your gate installations and surrounding areas with a warm and atmospheric touch with this cubic wall lighting from the HELIOS portfolio. The high-quality aluminum housing guarantees durability in all weather conditions. Choose from different standard colors or personalize the uncolored variant with any powder coating of your choice. These lights are available in 2-3/16" and 2-15/16" widths and 12-24V DC connection, ideally combined with POWERSTONE.



IP 65




COLOR OPTIONS

- ALUM
- SILV
- 9005
- 7016

SPECIFICATIONS

- Available in various colors or customizable via powder coating
- Width: 2-3/16" or 2-15/16"
- Power consumption: max. 3W (12-24V DC)
- Color temperature: 2700K
- IP65
- Plug & play installation with WAGO connectors
- Lifetime: 50,000 hours while maintaining 80% of initial brightness
- Easy installation with standard tools and supplied Hex keys
- Brightness: 300 lm

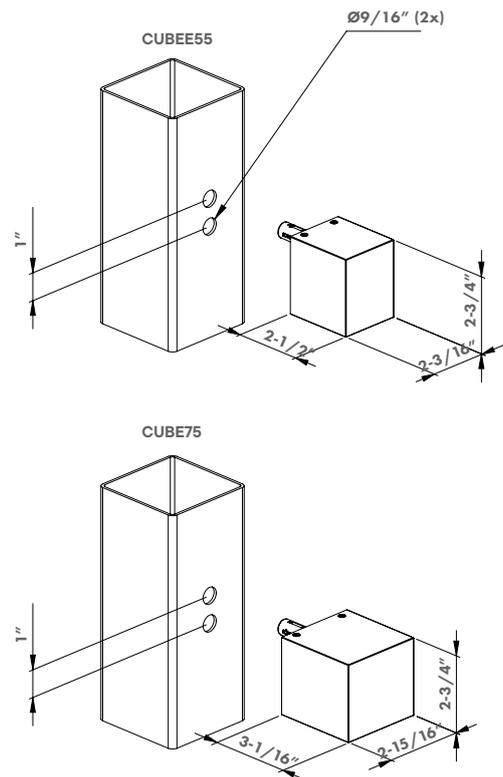

ORDER CODES

CUBE55-230V	2-3/16" mm wide, 230V AC
CUBE55-DC	2-3/16" mm wide, 12V DC / 24V DC
CUBE75-230V	2-15/16" mm wide, 230V AC
CUBE75-DC	2-15/16" mm wide, 12V DC / 24V DC

RECOMMENDED POWER SUPPLIES



POWERSTONE
P. 60



DC-POWER-12V-20W
P. 61



DC-POWER-24V-25W
P. 61

NEW **ARCO** (Patent pending)

Architectural arched wall lighting



Upgrade your gate installations and surrounding areas with a warm and atmospheric touch with this arched wall lighting from the HELIOS portfolio. The high-quality aluminum housing guarantees durability in all weather conditions. Choose from different standard colors or personalize the uncolored variant with any powder coating of your choice. These lights are available in 2-3/16" or 2-15/16" widths and 12-24V DC connection, ideally combined with POWERSTONE.




COLOR OPTIONS

- ALUM
- SILV
- 9005
- 7016

SPECIFICATIONS

- Available in various colors or customizable via powder coating
- Width: 2-3/16" or 2-15/16"
- Power consumption: max. 3W (12-24V DC)
- Color temperature: 2700K
- IP65
- Plug & play installation with WAGO connectors
- Lifetime: 50,000 hours while maintaining 80% of initial brightness
- Easy installation with standard tools and supplied Hex keys
- Brightness: 300 lm

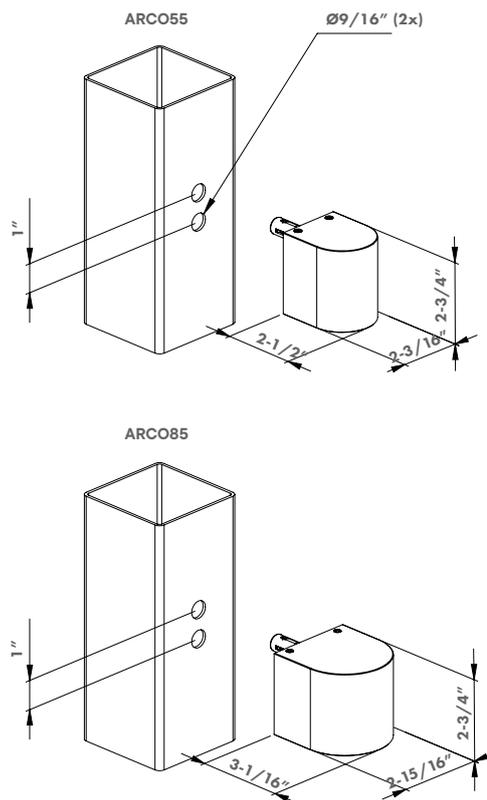

ORDER CODES

ARCO55-230V	2-3/16" mm wide, 230V AC
ARCO55-DC	2-3/16" mm wide, 12V DC / 24V DC
ARCO75-230V	2-15/16" mm wide, 230V AC
ARCO75-DC	2-15/16" mm wide, 12V DC / 24V DC

RECOMMENDED POWER SUPPLIES



POWERSTONE
P. 60



DC-POWER-12V-20W
P. 61



DC-POWER-24V-25W
P. 61

NEW **HEPTA** (Patent pending)

Architectural trapezoidal wall lighting



Upgrade your gate installations and surrounding areas with a warm and atmospheric touch with this trapezoidal wall lighting from the HELIOS portfolio. The high-quality aluminum housing guarantees durability in all weather conditions. Choose from different standard colors or personalize the uncolored variant with any powder coating of your choice. These lights are 2-15/16" wide and available for 12-24V DC connection, ideally combined with POWERSTONE.




COLOR OPTIONS

- ALUM
- SILV
- 9005
- 7016

SPECIFICATIONS

- Available in various colors or customizable via powder coating
- Width: 2-15/16"
- Power consumption: max. 3W (12-24V DC)
- Color temperature: 2700K
- IP65
- Plug & play installation with WAGO connectors
- Lifetime: 50,000 hours while maintaining 80% of initial brightness
- Easy installation with standard tools and supplied Hex keys
- Brightness: 300 lm

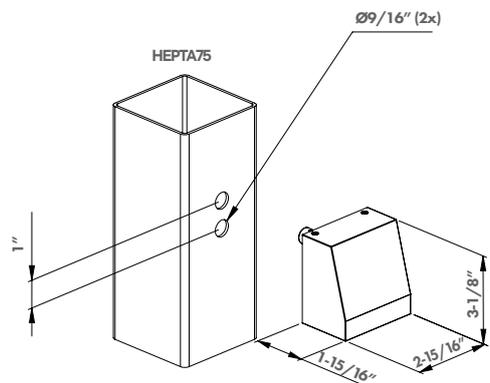

ORDER CODES

HEPTA75-230V 2-15/16" mm wide, 230V AC

HEPTA75-DC 2-15/16" mm wide, 12V DC / 24V DC

RECOMMENDED POWER SUPPLIES



POWERSTONE
P. 60



DC-POWER-12V-20W
P. 61



DC-POWER-24V-25W
P. 61



TRICONE

Design led-lighting for gates

Plug & Play design LED lighting for your fences & gates. Gives your gate an aesthetically pleasing look with minimal power consumption! The Quick-Fix provides a fast and strong fixing on your fencing.

24h
SHIPPING

2
YEAR
WARRANTY

ALU

QUICK-FIX

12V
AC/DC

IP
54


COLOR OPTIONS

SILV
24h
SHIPPING

9005
24h
SHIPPING

SPECIFICATIONS

- Fast and easy installation with Quick-Fix
- Aluminum housing with plastic (POM) cable guiding
- 3 White High-Flux LED Lights, color temperature: 5700K - 6500K
- ± 140° beam angle
- Life expectancy: 50,000 hours
- 300 lux (illuminance)
- Power: ± 1W (with 12V DC)
- 12V AC or DC (max. 18V DC or peak AC)
- Minimum power consumption and long lasting performance
- Resin encapsulated print circuit board for weather resistance
- Power up to 20 Tricone with 1 Locinox AC transformer or up to 15 with the DC power
- IP54

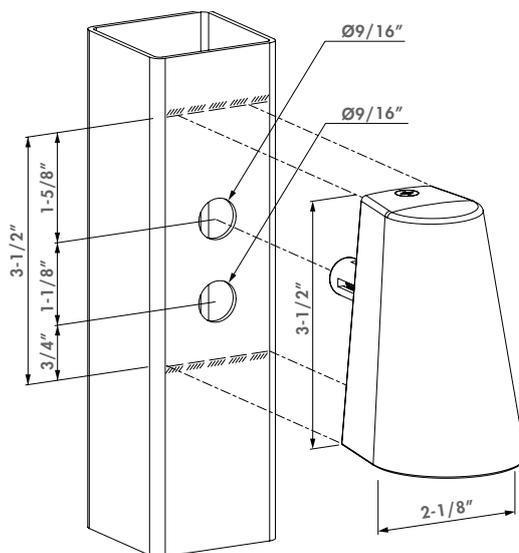

ORDER CODE

TRICONE Design LED lighting for gates with Quick-Fix **24h** SHIPPING

CABLE GUIDING



DVK-HD
P. 59



DVK
P. 58



2005
P. 60



PB-1
P. 58

RECOMMENDED POWER SUPPLIES



AC-TRANS-12V-25W
P. 60



DC-POWER-12V-20W
P. 61



DC-ACCESS-12V-20W
P. 60

Surface mounted magnetic locks

Full concept for swing gates

Surface-mounted magnetic locks are designed to provide a firm, silent closure and offer the possibility to be opened from a distance. With an extremely strong holding force and innovative dual layer coating, magnetic locks are highly resistant to intensive use and various weather influences - ideal for public applications.



1. MAGMAG

High quality surface mounted magnetic lock with guaranteed holding force and long durability. 500h salt spray resistant.

2. N-LINE-MAG

Aesthetic, adjustable and powder coated finishing profile for swing gates preventing people to stumble against protruding parts.

3. 3006PULL

Elegant powder coated handle for easy opening and closing of the gate.

TIP

- Save time and order the all-in-one N-LINE-MAG KIT
- Add access control to your gate with the strong, frost-free and watertight SLIMSTONE-2 keypad
- Make your gate self-closing with the aesthetic MAMMOTH gate closer



MAG

Surface mounted electromagnetic lock with integrated pull/push handles



The MAG is a bolt-on electromagnetic lock for powered access control. Available in 2 versions; the MAG3000 has up to 660 lbs. and the MAG6000 which has up to 1320 lbs. of pull force resistance. The aluminum powder coated housing with integrated design handles gives your access control gate that extra elegant touch. Stop losing precious time with welding boxes; drilling just 7 holes does the job – our patented Quick-Fix bolts help you install quickly and easily. A two-layer, protective coating guarantees that our electromagnetic locks are ready for years of worry-free use in the outside elements.

24h
SHIPPING







COLOR OPTIONS



SPECIFICATIONS

- 500h salt spray resistant! SGS Certified (ISO 9227)
- Guaranteed holding force tested on every magnetic lock
- With Quick-Fix fixing
- Weatherproof aluminum housing designed for exterior use
- Anti-residual magnetism kick-off system
- Raised edge on the magnet housing makes it impossible to put a crowbar between the magnet and the armature plate
- Voltage: 12V / 24V DC
- Current MAG3000: 500 mA / 12 V or 250 mA / 24 V
- Current MAG6000: 460 mA / 12 V or 230 mA / 24 V
- IP68 rated - Extremely resistant to water and dust

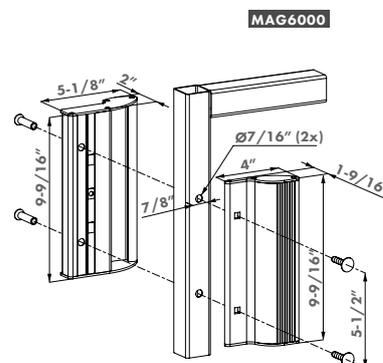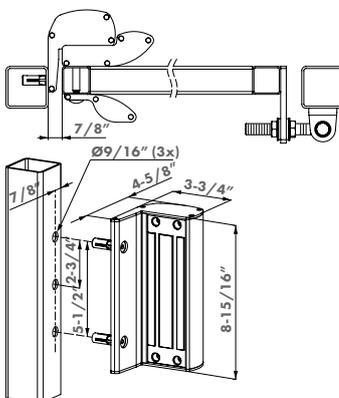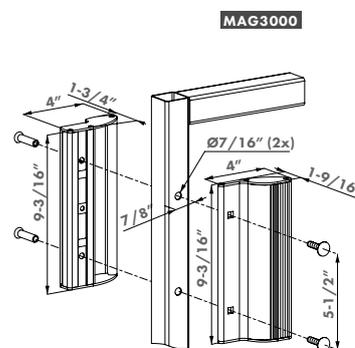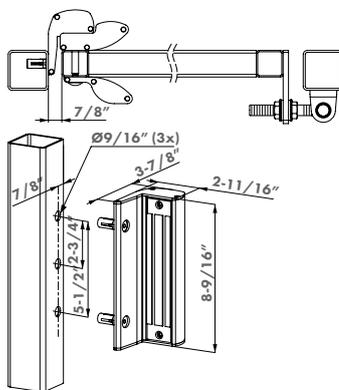

ORDER CODES

- MAG3000 For square posts and gate profiles of 1-9/16" till 3-1/8", 660 lbs pulling force **24h** SHIPPING
- MAG6000 For square posts and gate profiles of 1-9/16" till 3-1/8", 1320 lbs pulling force **24h** SHIPPING

RECOMMENDED PRODUCTS



N-LINE-MAG-3000
P. 49



PB-1
P. 58



DVK-HD
P. 59



DC-POWER-24V-25W
P. 61

MAGMAG

Surface mounted electromagnetic lock without integrated handles



Screw-on magnetic lock without handle. Available in 2 versions. MAGMAG3000 with 660 lbs and MAGMAG6000 with 1320 lbs of pulling force. The aluminum powder coated housing equipped with the unique Quick-Fix fixations ensures a fast and nicely finished mounting. Eliminate time-consuming welding; drilling 5 holes is enough to fix the lock. A two-layer, protective coating guarantees that our electromagnetic locks are ready for years of worry free use outside.

24h
SHIPPING




COLOR OPTIONS





SPECIFICATIONS


- 500h salt spray resistant! SGS Certified (ISO 9227)
- Guaranteed holding force tested on every magnetic lock
- Special two-layer protective coating developed for outdoor use
- Weatherproof aluminum housing designed for exterior use
- Anti-residual magnetism kick-off system
- Raised edge on the magnet housing makes it impossible to put a crowbar between the magnet and the armature plate
- IP68 rated - Extremely resistant to water and dust
- Current MAGMAG3000: 500 mA / 12 V or 250 mA / 24 V
- Current MAGMAG6000: 460 mA / 12 V or 230 mA / 24 V
- Voltage: 12V / 24V DC

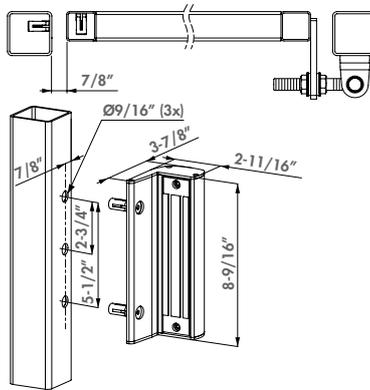

MAGMAG3000

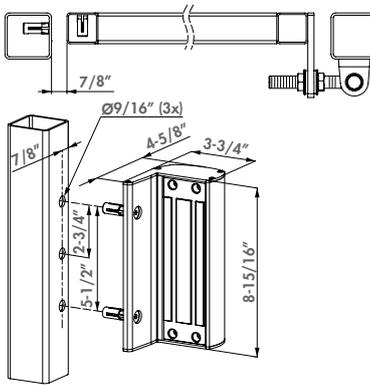

MAGMAG6000



ORDER CODES

MAGMAG3000 For square posts and gate profiles of 1-9/16" till 3-1/8", 660 lbs pulling force **24h** SHIPPING

MAGMAG6000 For square posts and gate profiles of 1-9/16" till 3-1/8", 1320 lbs pulling force **24h** SHIPPING

RECOMMENDED PRODUCTS



N-LINE-MAG-3000
P. 49



PB-1
P. 58



DVK-HD
P. 59



DC-POWER-24V-25W
P. 61

N-LINE-MAG

Profile for MAG3000 and MAGMAG3000 magnetic locks

Adjustable, powder coated aluminum design profile for aesthetic closing of the gaps between MAG3000 or MAGMAG3000 magnetic locks. To be fixed to the post. Prevents passersby to bump into the protruding parts of the magnetic lock.



24h
SHIPPING

2
YEAR
WARRANTY

ALU

QUICK-FIX



COLOR OPTIONS

SILV
24h
SHIPPING

9005
24h
SHIPPING

SPECIFICATIONS

- Profile length: 78-3/4"
- Delivered with self-drilling screws, compatible with Quick-Fix
- 2 plastic cover caps and 6 in-between caps included
- Separate adaptor needed with use of 3006PULL handle, delivered with 3006PULL

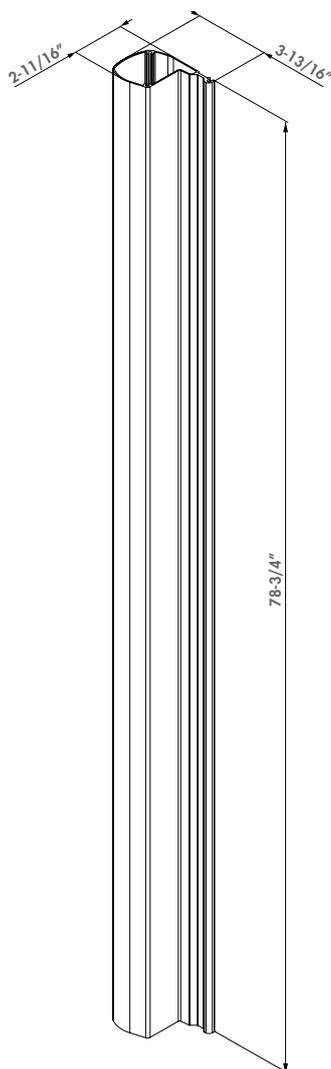

ORDER CODE

N-LINE-MAG-3000 Aluminium finishing profile for MAG3000 & MAGMAG3000 **24h** SHIPPING

RECOMMENDED MAGNETIC LOCKS



MAG3000
P. 47

MAGMAG3000
P. 48



N-LINE-MAG-KIT-3000

Set with N-LINE MAG profile, 2x MAGMAG3000, 3006PULL

Set with N-LINE MAG profile and 2x MAGMAG3000 and 3006PULL handle. 3006PULL handle is included to finish your gate. Aesthetic solution which prevents passersby to stumble against the parts of the magnetic lock.





24h
SHIPPING

COLOR OPTIONS



SPECIFICATIONS

- Adjustable aluminum design profile to mount above, below and in between the magnets
- Profile length: 78-3/4"
- Delivered with self-drilling screws, compatible with Quick-Fix
- 2 plastic cover caps and 6 in-between caps included
- Aluminum 3006PULL handle included
- Delivered with 2x MAGMAG3000
- Voltage: 12V / 24V DC
- Current: 500mA / 12V or 360mA / 24V

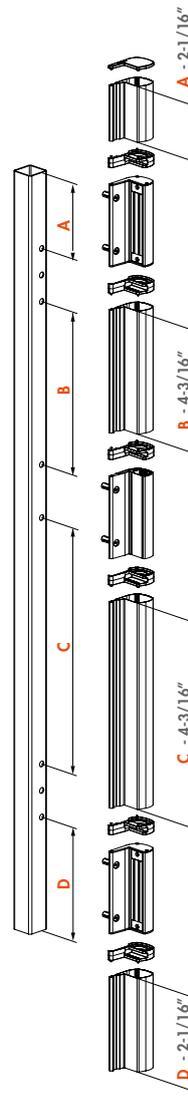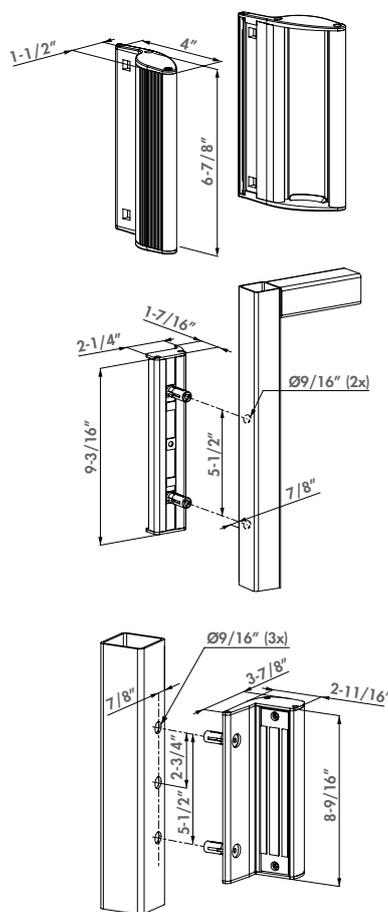

ORDER CODE

N-LINE-MAG-KIT-3000 Set with N-LINE MAG profile and 2x MAGMAG3000 and 3006PULL handle **24h** SHIPPING

KIT INCLUDES



N-LINE-MAG-3000
P. 49



MAGMAG3000
P. 48



3006PULL
P. 186

Built-in magnetic locks

Full concept for sliding or swing gates

Built-in magnetic locks provide a discreet and secure solution for various gate situations and add the value of integrating with access control. With their extreme holding force and dual layer coating, these magnetic locks deliver reliable performance and withstand harsh weather conditions.



1. MAGUNIT

High quality surface mounted magnetic lock with guaranteed holding force and long durability. 500h salt spray resistant.

2. N-LINE-B-MAG

Aesthetic, adjustable and powder coated finishing profile for sliding or swing gates preventing people to stumble against protruding parts.

3. 3006PULL

Elegant powder coated handle for easy opening and closing of the gate.

TIP

- Save time and order the all-in-one N-LINE-B-MAG KIT
- Add access control to your gate with the strong, frost-free and watertight SLIMSTONE-2 keypad
- Make your gate self-closing with the powerful VERTICLOSE-2 gate closer





B-MAG

Built-in electro-magnetic lock for swing gates

Clean lines and security are assured with this magnetic lock's installation. It's installed right into the latching post. Our patented Quick-Fix fasteners and powder coating means it will hold up to the most extreme weather conditions. The rubber bumpers prevent shaking or damage to the gate and its hardware in case of harsh handling. The flexible assembly of the armature plate guarantees a solid latch connection even if the gate isn't perfectly aligned.

24h
SHIPPING




COLOR OPTIONS



SPECIFICATIONS

- Guaranteed holding force tested on every magnetic lock
- Minimal pulling force: 2500N (600 lbs)
- 500h salt spray resistant! SGS Certified (ISO 9227)
- Special two-layer protective coating developed for outdoor use
- Anti-residual magnetism kick-off system
- Current: 460mA / 12V or 230mA / 24V
- Voltage: 12V / 24V DC
- IP68 rated - Extremely resistant to water and dust

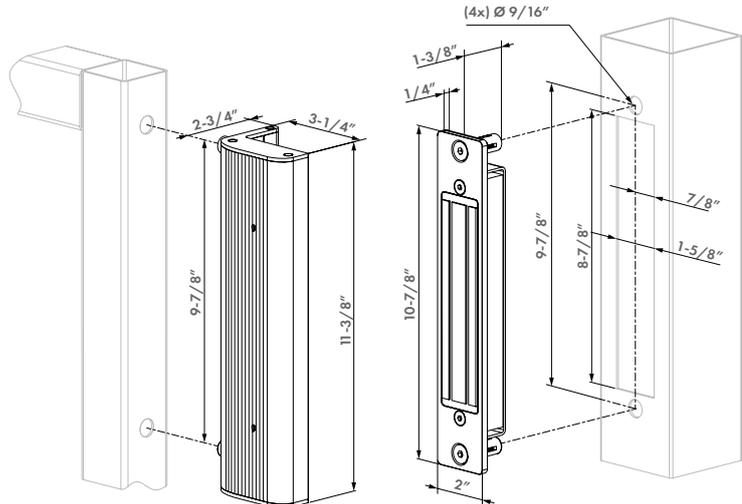

ORDER CODE

B-MAG Integrated magnet and bolt-on anchorplate for swing gates **24h** SHIPPING

RECOMMENDED PRODUCTS



PB-1
P. 58



DVK-HD
P. 59



SLIMSTONE-2
P. 38



DC-ACCESS-12V-20W
P. 60



DC-POWER-12V-20W
P. 61



DC-POWER-24V-25W
P. 61

MAGUNIT2500


Set with magnet and anchor plate for N-LINE (B or S)-MAG profiles

Set with a MAG and anchor plate along with fittings for use with a N-LINE-B-MAG or N-LINE-S-MAG, 1 or more MAGUNITs can be mounted in the N-LINE profile.



SPECIFICATIONS

- Guaranteed holding force tested on every magnetic lock
- 500h salt spray resistant! SGS Certified (ISO 9227)
- Special two-layer protective coating developed for outdoor use
- Anti-residual magnetism kick-off system
- Current: 460mA / 12V or 230mA / 24V
- Voltage: 12V / 24V DC
- Minimal pulling force: 2500N (600 lbs)
- IP68 rated - Extremely resistant to water and dust

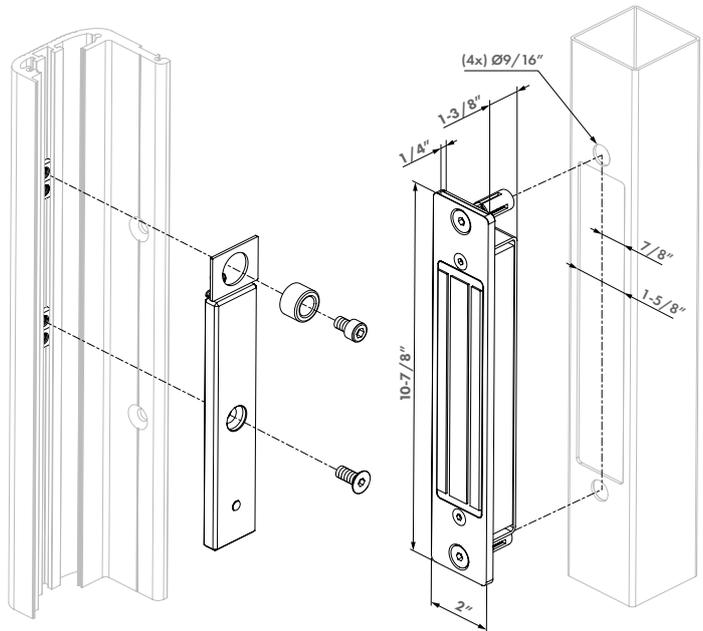

ORDER CODE

MAGUNIT2500 Magnet and anchorplate for N-LINE-B-MAG and N-LINE-S-MAG profiles

REQUIRED PRODUCTS



N-LINE-B-MAG
P. 55

N-LINE-S-MAG
P. 55



24h
SHIPPING

N-LINE-B-MAG

Aluminum finishing profile for swing gates to combine with MAGUNIT-2500

Adjustable, powder coated aluminum design profile for aesthetic closing of swing gates along with 1 or more MAGUNIT-2500. Thanks to the integrated magnet and the armature plate, which are both integrated in the design profile, a safe and complete solution without any protruding components is guaranteed.

COLOR OPTIONS



SPECIFICATIONS


- Profile length: 78-3/4"
- Fast and easy fixation with Quick-Fix bolts
- Powder coated aluminum housing
- Specially designed for exterior use

COMPATIBLE MAGNET



MAGUNIT2500

P. 54

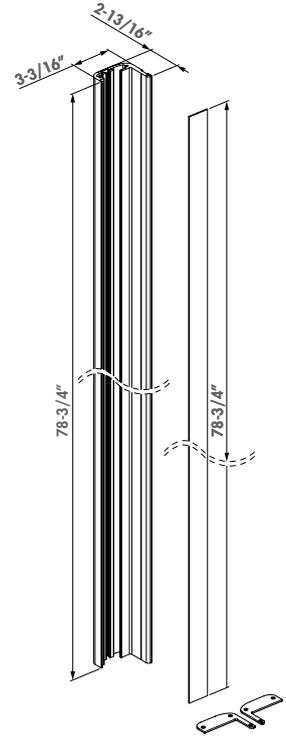

ORDER CODE

N-LINE-B-MAG Aluminum finishing profile for MAGUNIT-2500 **24h** SHIPPING



24h
SHIPPING

N-LINE-S-MAG

Aluminum finishing profile for sliding gates to combine with MAGUNIT

Adjustable, powder coated aluminum design profile for aesthetic closing of sliding gates along with 1 or more MAGUNIT-2500. Thanks to the integrated magnet and the armature plate, which are both integrated in the design profile, a safe and complete solution without any protruding components is guaranteed.

COLOR OPTIONS



SPECIFICATIONS


- Profile length: 78-3/4"
- Fast and easy fixation with Quick-Fix bolts
- Powder coated aluminum housing
- Specially designed for exterior use

COMPATIBLE MAGNET



MAGUNIT2500

P. 54

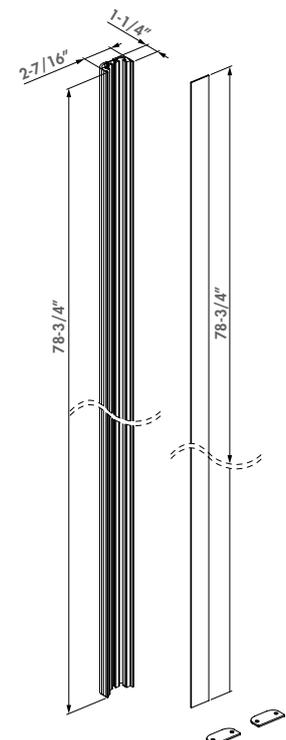

ORDER CODE

N-LINE-S-MAG Aluminum finishing profile for MAGUNIT-2500 **24h** SHIPPING



N-LINE-B-MAG-KIT


Set with N-LINE-B-MAG, 2x MAGUNIT & 3006PULL

Electromagnetic set for swing gates for fixing to the gate frame. The set consists of two MAGUNIT, the 3006PULL and an aesthetic design profile. Available in SILV and RAL9005.



SPECIFICATIONS

- Includes 2 integrated magnets equipped with Quick-Fix mounting (MAGUNIT-2500)
- Including aluminum filling profile with Quick-Fix mounting (N-LINE-B-MAG profile)
- Profile length: 78-3/4"
- Including 2 aluminum covers for an aesthetical finishing on top and bottom
- Specially designed for exterior use
- Voltage: 12V / 24V DC
- Current: 460mA / 12V or 230mA / 24V

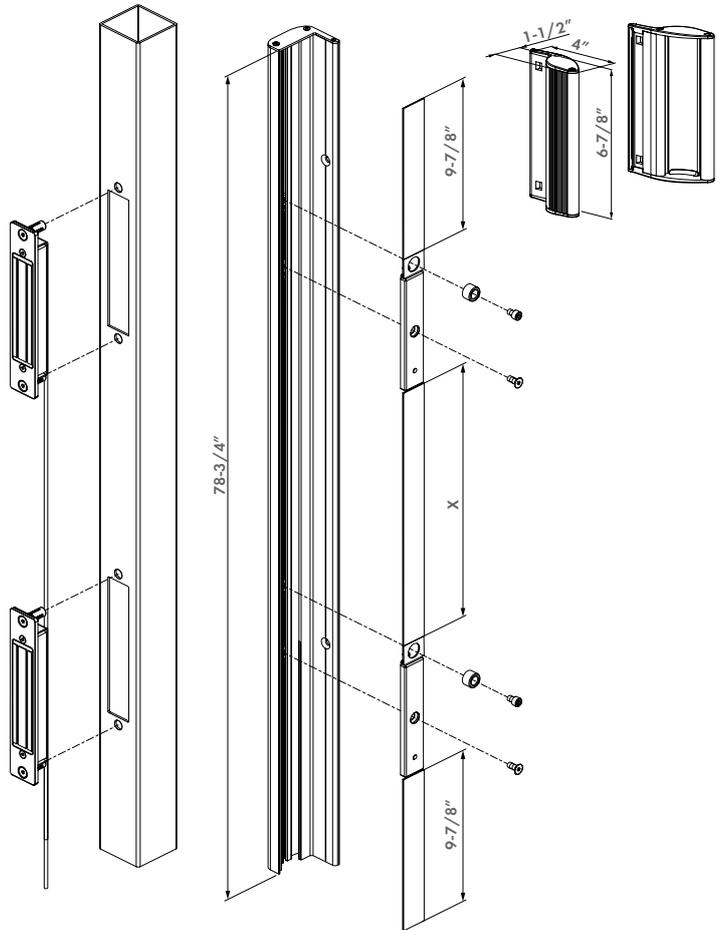

ORDER CODE

N-LINE-B-MAG-KIT Set with N-LINE-B-MAG profile and 2x MAGUNIT-2500 24h SHIPPING

KIT INCLUDES



N-LINE-B-MAG
P. 55



MAGUNIT2500
P. 54



S-MAG

Integrated magnet lock for sliding gates

S-MAG is the perfect product to lock any type of sliding gate. It has a guaranteed tensile strength of 600 lbs and resists extreme weather conditions. The rubber bumpers prevent shaking of the gate, and damage to the gate and its accessories in case of harsh handling, and the flexible assembly of the armature plate guarantees a normal closing even if the gate isn't perfectly aligned.

24h
SHIPPING




COLOR OPTIONS



SPECIFICATIONS

- Guaranteed holding force tested on every magnetic lock
- 500h salt spray resistant! SGS Certified (ISO 9227)
- Special two-layer protective coating developed for outdoor use
- Anti-residual magnetism kick-off system
- Minimal pulling force: 2500N (600 lbs)
- Current: 460mA / 12V or 230mA / 24V
- Voltage: 12V / 24V DC
- IP68 rated - Extremely resistant to water and dust

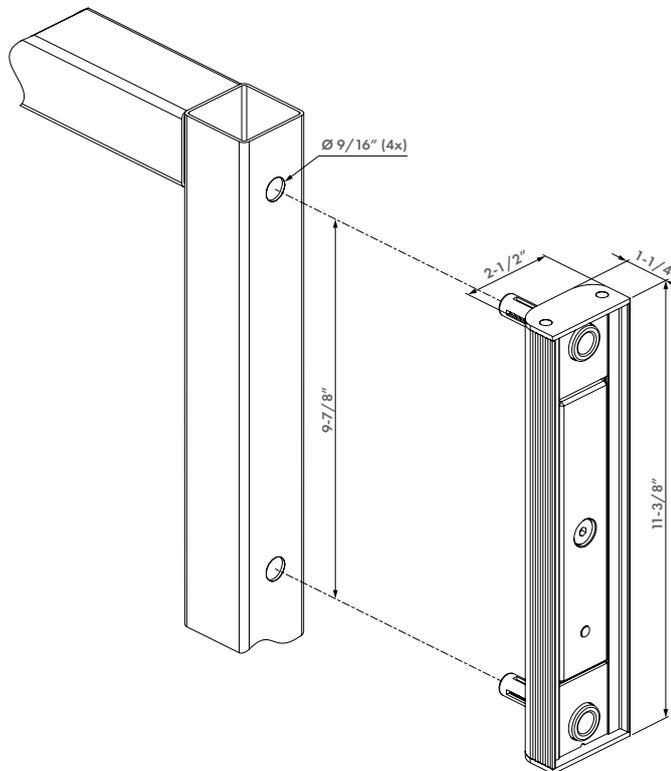

ORDER CODE

S-MAG Integrated magnet and bolt-on anchorplate for sliding gates, 550lbs pulling force **24h** SHIPPING

RECOMMENDED PRODUCTS



SLIMSTONE-2
P. 38



PB-1
P. 58



DVK-HD
P. 59



DC-ACCESS-12V-20W
P. 60



DC-POWER-12V-20W
P. 61



DC-POWER-24V-25W
P. 61




24h
SHIPPING

PB-1

Powerbox – Transformer housing

Aluminum powder coated transformer box with Quick-Fix for strong and easy installation.

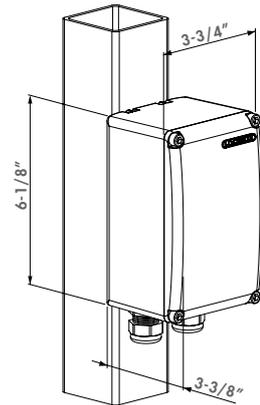

HOUSING COLOR OPTIONS



SPECIFICATIONS

- Waterproof transformer box - IP66
- Powder coated aluminum housing
- DIN-rail (type TH35) mount: 3-3/8" long
- Supplied with 2 gland nuts M20 and 2 stop plugs M16
- Designed with heat-dissipation fins at the back

COMPATIBLE PRODUCTS



POWERSTONE
P. 60



DC-ACCESS-12V-20W
P. 60



DC-POWER-12V-20W
P. 61



DC-POWER-24V-25W
P. 61

ORDER CODE

PB-1 Transformer housing with DIN-rail and Quick-Fix fixing **24h** SHIPPING



24h
SHIPPING


DVK

Cable guide w/flex ss conduit

Stainless steel guiding cable to protect your electrical wires in an outside environment.

SPECIFICATIONS

- Stainless steel guiding cable for electrical wire
- Length of the cable: 17-5/8"
- Supplied with 8 self tapping screws
- Inner diameter: \varnothing 3/8"

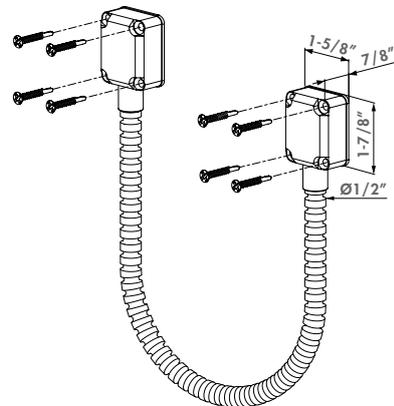

RECOMMENDED CABLE



2005
P. 60

ORDER CODE

DVK Stainless steel flex cable, 17-3/4" Long **24h** SHIPPING



24h
SHIPPING


DVK-HD

Reinforced, braided stainless steel guiding cable

Aesthetic and durable solution for the guidance of electrical wiring. Protects your wiring against dirt, moist and vandalism in an outside environment. The cable wraps around and protects the cabling of your electrical gate hardware and avoids the risk of short circuiting.

SPECIFICATIONS

- Available with 17-3/4" or 25-9/16" braided cable
- Protects electrical wiring against vandalism, moist, dirt and vermin
- Strong fixation by means of 8 self-tapping stainless steel screws
- Cable entry: aluminum housing
- Inner diameter: Ø3/8"

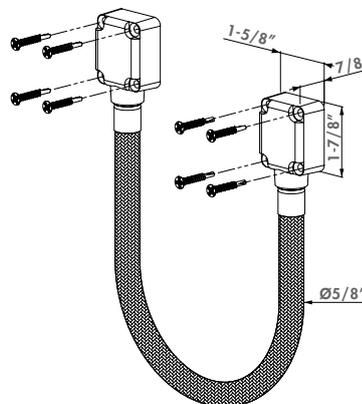

RECOMMENDED PRODUCTS



POWERSTONE
P. 60

ORDER CODES

- | | | |
|------------|--|------------------------|
| DVK-HD-450 | Reinforced stainless steel flex cable, 17-3/4" Long | 24h
SHIPPING |
| DVK-HD-650 | Reinforced stainless steel flex cable, 25-9/16" Long | 24h
SHIPPING |



24h
SHIPPING


GATESWITCH

Position detection set for gates - Stand alone

Multi-purpose position detection set, consisting of a magnet and magnetic switch. This set can be easily connected to any electrical system like your access control or security system. The distance between the magnets can be easily changed by means of an adjustable magnet and included filler plates.

SPECIFICATIONS

- Possibility to activate LED light when the sensor detects the magnet (requires 12V DC at the gate)
- Operates with Normally Open (N/O) or Normally Closed (N/C) contacts
- Required distance between the gate and the post is minimum 3/8" and maximum 2"
- Easy adjustment of distance between sensor and magnet by means of filling plates (fillers) and screwable magnet

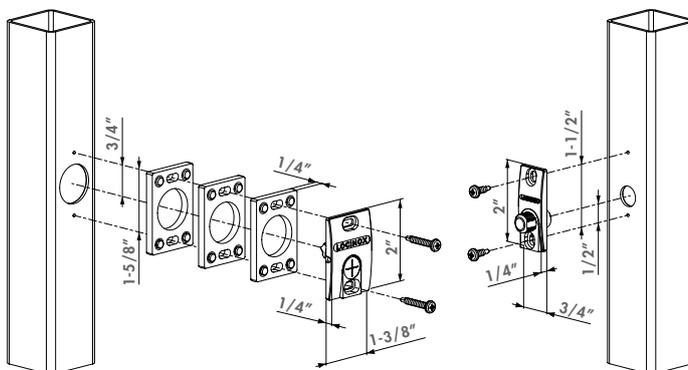

RECOMMENDED POWER SUPPLIES



DC-POWER-12V-20W
P. 61



DC-ACCESS-12V-20W
P. 60

ORDER CODE

- GATESWITCH For a min. gap of 3/8" and max. 2" between post and gate **24h** SHIPPING



24h
SHIPPING

2005

Electrical wire

Electrical cable; very flexible and weatherproof. Resists breaking and shorting out. Lasts longer than standard home wiring.

SPECIFICATIONS

- Length of the wire: 16-1/2ft
- 2 × 21 ga (0.75 mm | 1/32")
- Water resistant & weatherproof
- Tested at 500.000 bendings

ORDER CODE

2005 Electrical cable 196" - 2 × 21 ga (0.75 mm | 1/32")



AC-TRANS-12V-25W

Safety transformer 12V AC

Safety Transformer 12V - 25W

SPECIFICATIONS

- Mounting on DIN-rail or directly
- Power: 25W
- Primary voltage: 230V AC - Secondary voltage 12V AC
- Aluminum housing

ORDER CODE

AC-TRANS-12V-25W Transformer 12V AC - 25W



24h
SHIPPING

POWERSTONE

60W power supply

High-quality 60W switching-mode power supply. Plug & Play installation guaranteed and integrated overload indicator.

SPECIFICATIONS

- Input: 110-240 VAC, 50-60Hz, 1.2A maximum
- Output: +24V DC, 2.5A maximum, 60W
- Resettable overload indicator
- Auxiliary 24V DC output available

ORDER CODE

POWERSTONE 60W power supply **24h** SHIPPING



DC-ACCESS-12V-20W

All-in one 12V DC Access Module with integrated timer

All-in-one, Plug&Play Access Module (230V AC). Including power supply and integrated timer with easy to read display and easy to operate: time range (1 to 99s) of switched state controlled by push buttons. A 12V DC Fail Open or Fail Close device can be easily connected to the module.

SPECIFICATIONS

- Mounting on DIN-rail or directly
- Robust control module: encapsulated for superior humidity resistance
- Input voltage: 230V AC / Maximum output power: 20W

ORDER CODE

DC-ACCESS-12V-20W All-in one 12V DC Access Module with integrated timer



DC-POWER-12V-20W

Safety power supply 12V and 13V DC

Safety power supply 12V DC - 20W

24h
SHIPPING

SPECIFICATIONS

- Mounting on DIN-rail or directly
- Power: 20W
- Primary voltage: 230V AC - Secondary voltage 12V / 13V DC
- Robust control module: encapsulated for superior humidity resistance

ORDER CODE

DC-POWER-12V-20W Power supply 12 V DC - 20 W **24h** SHIPPING



DC-POWER-24V-25W

Safety power supply 24V and 25V DC

Safety power supply 24V DC - 25W

24h
SHIPPING

SPECIFICATIONS

- Mounting on DIN-rail or directly
- Power: 25W
- Primary voltage: 230V AC - Secondary voltage 24V / 25V DC
- Robust control module: encapsulated for superior humidity resistance

ORDER CODE


DC-POWER-24V-25W Power supply 24-25V DC - 25W **24h** SHIPPING



SWITCHSTONE-STD

2-channel relay module

The SwitchStone-STD relay module has been developed to work in combination with devices such as the SlimStone-X keypad. The SwitchStone-STD ensures maximum security thanks to 2 external relays, both with a Common, Fail Open and Fail Close contact. These relays are capable of switching voltages up to 250V AC/26V DC, allowing them to be used in a wide range of applications, including switching lighting. Free exit functionality can be easily implemented using the 2 inputs on the module.

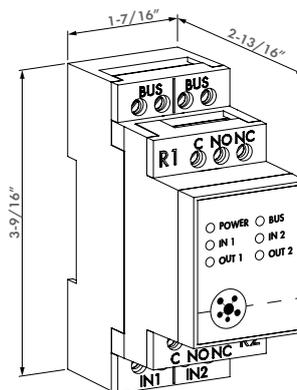

SPECIFICATIONS

- Includes 2x 250V AC/26V DC relays, each with COM, Fail Open and Fail Close contact
- Long range secure 2-wire communication with the SlimStone-X, up to 985' distance
- Auto back up functionality
- DIN-rail mountable
- Tested from -22°F to 185°F
- Relay switching duration adjustable between pulse and timer mode (500 ms - 99 s)
- To be used exclusively with the Powerstone 60W power supply
- Current: maximum 0.07 A
- Consumption: maximum 1.7 W

COMPATIBLE PRODUCTS



SLIMSTONE-X
P. 38



PB-1
P. 58



POWERSTONE
P. 60

ORDER CODE

SWITCHSTONE-STD-X-230 2-channel relay module with NO/NC contact



Turnstiles

The Locinox (electro)mechanical control unit allows you to easily create a maintenance free and high quality turnstile. You have an (electro)mechanical unit at your disposal with which you can match the design of your turnstile to the design of your fencing.

The complete Turnitec solution

Electro/mechanical control unit for turnstiles

1. TT-FO2 / TT-FC2 / TT-MM3S

Fail Open or Fail Close electromechanical module for access control

2. TT-DM3 120° / TT-SDM4 90°

Recommended hydraulic damping mechanism for extra user comfort

3. TT-BM3S 120° / TT-SM4S 90°

The essential module for any turnstile

4. TT-CL2


Counter and passing light signal module for visitor flow management

5. TT-BSP

Welding plate for fast and perfect installation of Turnitec on any turnstile

6. TT-SAH

Recommended for perfect connection of the basic module with the spline axle

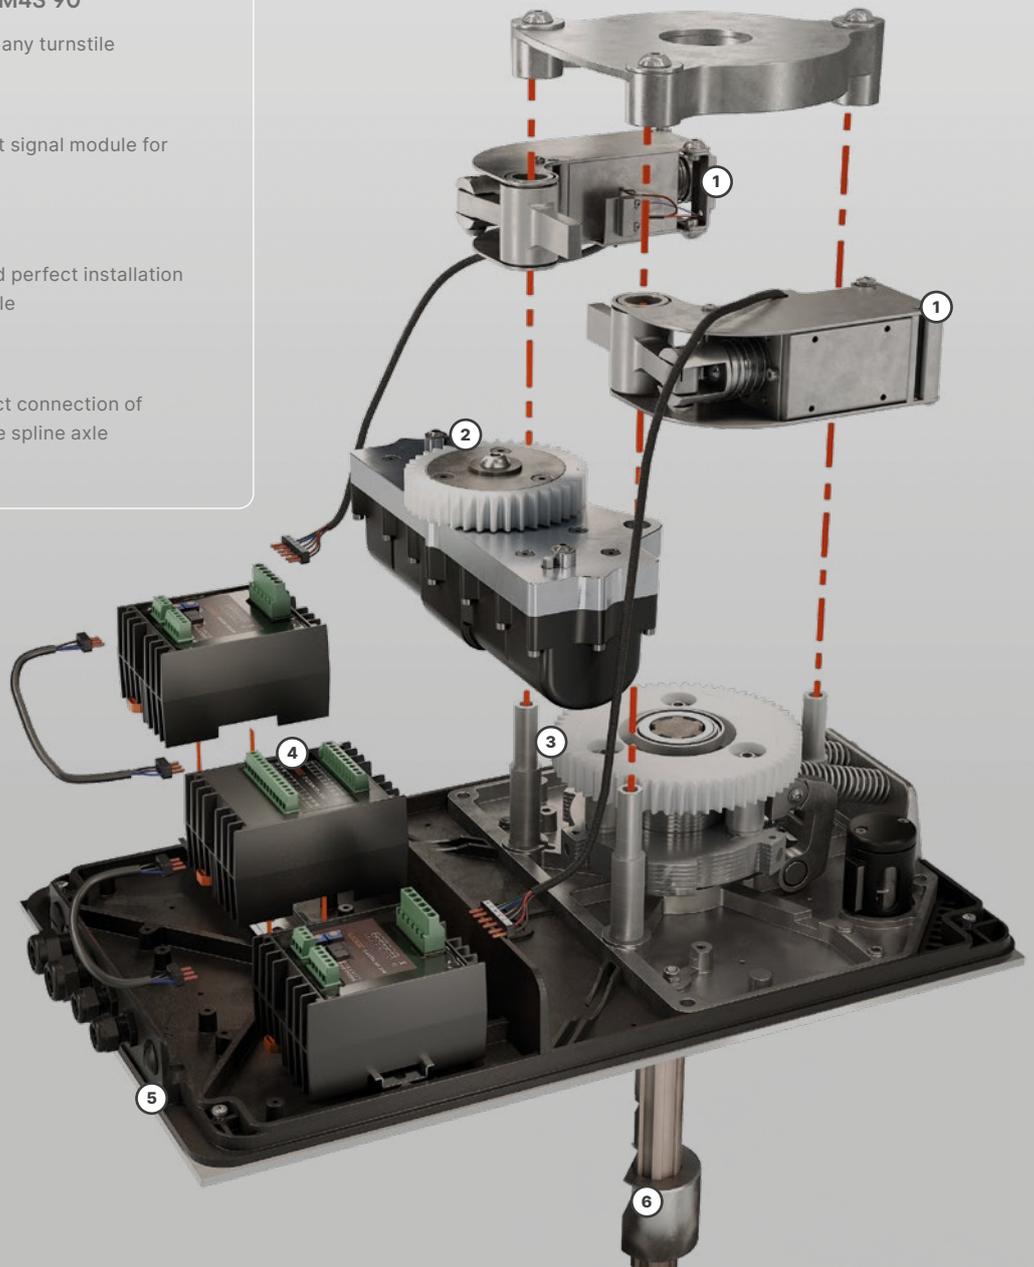




TTEC (Patented)

TURNITEC - Modular (electro)mechanical control unit for turnstiles

The Locinox (electro)mechanical control unit (3-arm 120° or 4-arm 90°) allows you to easily create a maintenance free and high quality turnstile. You can match the design of your turnstile to the design of your fencing! The Turnitec mechanism is applicable to any turnstile and a quick installation is guaranteed. Thanks to the 100% modular design you can adapt the mechanism to your customers' desires. A comfortable and safe operation is guaranteed by the optional damping system that is unaffected by temperature changes.

SPECIFICATIONS

- 100% modular system: composition according customers' desires and expandable at any moment
- Available for 3-arm (120°) and 4-arm (90°) turnstile
- Optional interchangeable left/right mechanical or electromechanical modules (Fail Open or Fail Close)
- Automatic return to starting position (by means of industrial pressure springs) after every passage
- Anti-passback security (locking after a 60° or 45° rotation): prevents the simultaneous passing of 2 persons
- Very robust implementation and strong connection with the turnstile by a 1-3/8" diameter spline axle (length 12-3/4")
- Manufactured completely in stainless parts (stainless steel and aluminum)
- Optional damping system guarantees smooth and gradual movements. Damping is continuous and unaffected by temperature changes (patented system)
- Possible to set signal duration
- IP55 housing protects the mechanism against water, dirt, wind, dust and vermin

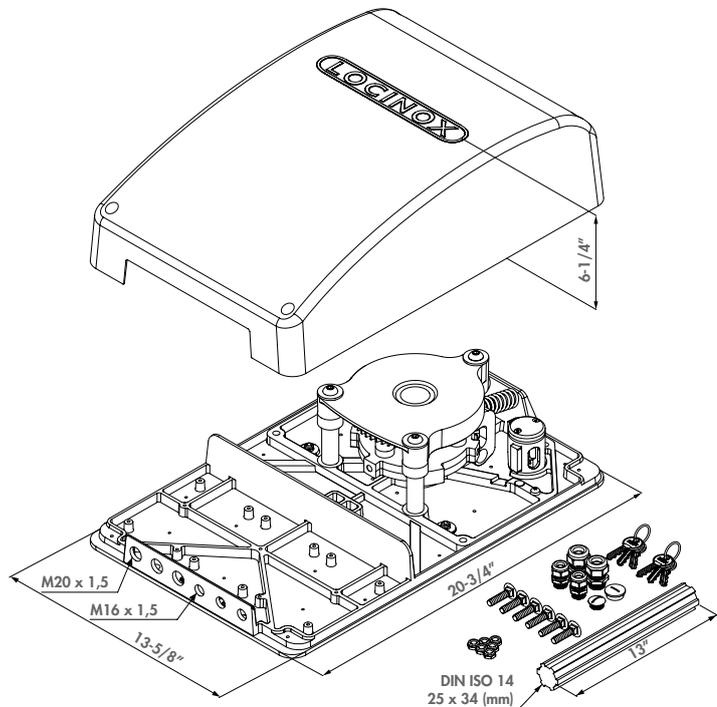

ORDER CODE

TTEC-BMS-FO2-FC2-DM-CL2

Full option Turnitec, Base mechanism + 1 Fail Open module + 1 Fail Close module + Hydraulic damper + 1 Counter & Light module

COMPATIBLE TURNITEC MODULES



TT-BM3S
P. 66



TT-DM3
P. 66



TT-FO2
P. 67



TT-FC2
P. 67



TT-MM3S
P. 67



TT-CL2
P. 67



24h
SHIPPING

TT-BM3S

TURNITEC base mechanism for 3-arm turnstile

With the TURNITEC base mechanism you can bi-directionally operate your turnstile free-turning. This 3-arm (120°) mechanism can be modular expanded with the mechanical and electromechanical locking modules and a hydraulic damper to further finetune the access control and usability of your turnstile.

SPECIFICATIONS

- With easy to mount optional welding plate and spline axle
- Modular system to further expand

ORDER CODE

TT-BM3S Base mechanism 3-arm 20-7/8" x 13-3/4" x 6-11/16" **24h** SHIPPING



24h
SHIPPING

TT-DM3 (Patented)

Hydraulic damper for TURNITEC for 3-arm turnstile

Unique hydraulic damper for your TURNITEC mechanism. The patented system is unaffected by temperature changes. The first half of the rotation is undamped and the second half is damped progressively thanks to the continuous damping of the mechanism. This results in a fluent motion of the turnstile and avoids the turnstile hitting the users heels.

SPECIFICATIONS

- Damping of the rotational movement is continuous and progressive and starts from 60° in the 3-arm version
- Easy to retrofit on an existing TURNITEC system

ORDER CODE

TT-DM3 Hydraulic damping module for TT-BM3 **24h** SHIPPING



TT-SM4S

TURNITEC base mechanism for 4-arm turnstile

With the TURNITEC base mechanism you can bi-directionally operate your turnstile free-turning. This 4-arm turnstile (90°) mechanism can be modular expanded with the mechanical and electromechanical locking modules and a hydraulic damper to further finetune the access control and usability of your turnstile.

SPECIFICATIONS

- With easy to mount optional welding plate and spline axle
- Modular system to further expand

ORDER CODE

TT-SM4S Base mechanism 4-arm 20-7/8" x 13-3/4" x 6-11/16"



TT-SDM4 (Patented)

Hydraulic damper for TURNITEC for 4-arm turnstile

Unique hydraulic damper for your TURNITEC mechanism. The patented system is unaffected by temperature changes. The first half of the rotation is undamped and the second half is damped progressively thanks to the continuous damping of the mechanism. This results in a fluent motion of the turnstile and avoids the turnstile hitting the users heels.

SPECIFICATIONS

- Patented hydraulic damping system for 4-arm TURNITEC (90°)
- Easy to retrofit on an existing TURNITEC system

ORDER CODE

TT-SDM4 Hydraulic damping module for TT-SM4S



TT-CL2

Turnitec counter & passing light signals module

Plug&Play module which enables connecting counters and passing light signals in both turning directions. A counter tells you how many people are on the terrain or how many rotations your turnstile made while passing light signals guarantee a swift, safe and correct use of the turnstile.

SPECIFICATIONS

- Easy to connect with the TT-FO31 and TT-FC31 module
- For both clockwise (CW) and counterclockwise (CCW) direction a voltage free changeover contact (NO&NC) is provided for passing light signal control (max 250V AC (30V DC)/1A)

ORDER CODE

TT-CL2 Turnitec counter & passing lights module



TT-FO2

Fail Open electromodule for TURNITEC

With the electromechanical module an operator has the ability to control incoming and outgoing traffic. Granting access or closing the system, changing the rotational direction and executing access control all can be managed easily with the TURNITEC module.

SPECIFICATIONS

- Input voltage: 110V AC / Maximum output power: 25W
- Anti-passback security: protected against the simultaneous entrance of 2 persons thanks to the 60° locking mechanism

ORDER CODE

TT-FO2 Fail-Open access control electromodule



TT-FC2

Fail Close electromodule for TURNITEC

With the electromechanical module an operator has the ability to control incoming and outgoing traffic (Granting access, changing the rotational direction and executing access control). After authorisation the turnstile is unlocked electronically and visitors have access to the terrain.

SPECIFICATIONS

- Input voltage: 110V AC / Maximum output power: 25W
- Anti-passback security: protected against the simultaneous entrance of 2 persons thanks to the 60° locking mechanism

ORDER CODE

TT-FC2 Fail-Close access control electromodule



TT-MM3S

Mechanical module for TURNITEC

This module for the TURNITEC mechanism offers the advantage of working completely mechanical. No power supply or cabling is needed. The release and locking of a direction of rotation is easy to set with a Europrofile cylinder lock. People can enter the terrain by pushing the turnstile arm.

24h
SHIPPING

SPECIFICATIONS

- Can be used for left or right rotation
- Anti-passback security: protected against the simultaneous entrance of 2 persons thanks to the 60° locking mechanism

ORDER CODE

TT-MM3S Mechanical access control module **24h** SHIPPING



LOOKS



Locks

Locinox locks guarantee a well operating gate. Every lock is thoroughly tested excessively in our own test center where they are exposed to the most extreme circumstances. This ensures us that our locks will work in all weather conditions. We offer a variety of locks for garden gates, industrial gates or swimming pool gates. Locinox locks - the safest solution in fence protection.

Industrial quality and modularity

3 YEARS PREMIUM WARRANTY

MAINTENANCE FREE

30+ YEARS OF EXPERTISE



QUICK AND FLEXIBLE

- 500+ configurations
- Shipping within 24 hours

SECURE

- Day and night bolt (1)
- 2200 lbs lateral holding force
- 1 inch locking (2)

EASY INSTALLATION

- Adjustable day bolt
- 4-hole pattern
- QUICK-FIX mounting (3)


MAINTENANCE-FREE

- Corrosion resistant
- 100% stainless steel mechanism (4)
- KTL-coated lock box (5)

PROVEN QUALITY

- 500K guaranteed testing
- 3-year warranty

1 easy installation method for all our locks

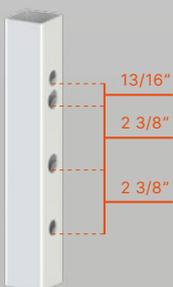

It gets even better.
Endless upgrades possible!

One drilling template for all our locks and keeps. With this interchangeability, the Locinox lock gives you the opportunity to offer a solution for every situation.

	Electric gate lock with fail open or close functionality		Anti-panic lock for free exit		Ornamental gate lock
	Gate lock with 2 cylinders		Gate lock with child proof security knob		Push handle set
	Mechanical code lock		Push bar for free exit		Electric code lock
Compatible with many keeps					
	Adjustable security keep out of stainless steel		Surface mounted electric strike		Surface mounted electric security keep



LAKQU2 (Patented)

Surface mounted gate lock

High quality gate lock with aluminum housing and stainless steel mechanism. We recommend this lock as the standard for your industrial gates. The latch and dead bolt have 3/4" continuous adjustment to allow perfect latching / locking of the mechanism. A stainless steel throw of 7/8" guarantees secure locking. Handle depends on color: silver locks ship standard with the modern aluminum anodized handle pair and all other colors ship with the black ornamental handle pair. The latch gap required is keep dependent, but the standard and security keeps require a 1-1/4" latch gap. For a fast and highly precise installation, we recommend using the Drill-Fix drilling jig.

24h
SHIPPING

3
YEAR
WARRANTY

STAINLESS
STEEL

500 K
CYCLES

180°



LOCK BOX COLOR OPTIONS

SILV
24h
SHIPPING

9005
24h
SHIPPING

7016


6009

6005

9010

SPECIFICATIONS

- ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test
- Easy left or right changing of the self-latching daybolt
- Throw of the dead bolt, 7/8" in 1 turn of the key
- Key-operated self-latching bolt
- 4-hole mounting with two hex head socket screws
- Center distance bolts: 2-3/8"
- Continuous adjustment of the daybolt up to 3/4" without removing the lock box
- Stainless steel mechanism

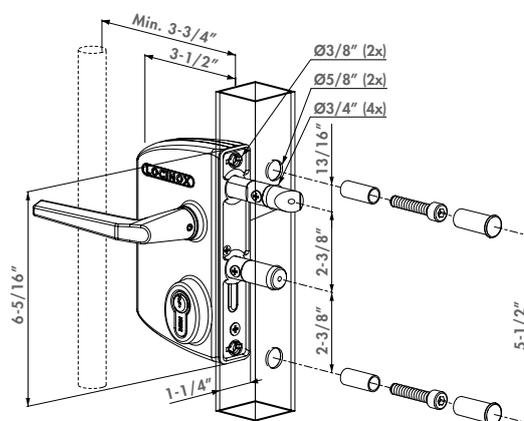

LOCKS FOR
SWING GATES

RECOMMENDED KEEPS



SAKLQF
P. 113



SH-KLQF
P. 113



MODULEC-SA
P. 112

ORDER CODES

Profile width (Inch)	Square	Round
3/8" to 1-1/4"	•	
1-1/4" to 2"	•	•
1-1/2" to 2-3/8"	•	•
2-1/2" to 2-3/4"	•	•
3" to 4"	•	•
4" to 4-3/4"	•	•

RECOMMENDED HANDLES



3006B
P. 190



3006I
P. 192



3006D
P. 191



KIDLOC
P. 186

EASY EXIT HANDLES & ACCESSORIES



PUSHBAR-L
P. 187



3006PUSH
P. 186



ROLLTOP
P. 203



SHROUD-LA
P. 183

LAKQU3 (Patented)

Surface mounted gate lock for Swiss profile cylinder



Industrial lock with aluminum housing and stainless steel mechanism. This lock is delivered without a cylinder and is suitable for use with a 7/8" cylinder (Swiss profile cylinder). The latch and dead bolt have 3/4" continuous adjustment to allow perfect latching / locking of the mechanism. A stainless steel throw of 7/8" guarantees secure locking. Handle depends on color: silver locks ship standard with the modern aluminum handle pair and all other colors ship with the black ornamental handle pair. The latch gap required is keep dependent, but the standard and security keeps require a 1-1/4" latch gap. For a fast and highly precise installation, we recommend using the Drill-Fix drilling jig.



STAINLESS
STEEL




LOCK BOX COLOR OPTIONS

SILV 9005 7016 6009 6005 9010

SPECIFICATIONS

- ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test
- Easy left or right changing of the self-latching daybolt
- Lock box for Swiss profile cylinder (Ø7/8")
- Throw of the dead bolt, 7/8" in 1 turn of the key
- Key-operated self-latching bolt
- 4-hole mounting with two hex head socket screws
- Center distance bolts: 2-3/8"
- Continuous adjustment of the daybolt up to 3/4" without removing the lock box
- Stainless steel mechanism

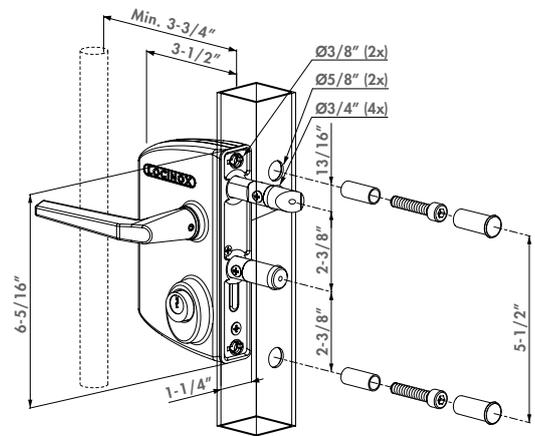

RECOMMENDED KEEPS



SH-KLQF
P. 113



SAKLQF
P. 113



MODULEC-SA
P. 112

ORDER CODES

Profile width (Inch)	Square	Round
3/8" to 1-1/4"	•	
1-1/4" to 2"	•	•
1-1/2" to 2-3/8"	•	•
2-1/2" to 2-3/4"	•	•

RECOMMENDED HANDLES



3006M
P. 190



3006I
P. 192



3006B
P. 190



3006R
P. 191

EASY EXIT HANDLES & ACCESSORIES



PUSHBAR-L
P. 187



3006PUSH
P. 186



SHROUD-LA
P. 183



DRILLFIX
P. 177



LUKYJ5 (Patented)

Surface mounted US Mortise cylinder gate lock (USA)

Excellent gate lock with aluminium housing and stainless steel mechanism. Specially developed to use with a standard 1-1/8" Mortise cylinder. Comes standard with 5pin keyed alike or keyed different (drilled 6pin). The latch and dead bolt have 3/8" continuous adjustment to allow perfect alignment of the locking mechanism. A stainless steel throw of 7/8" guarantees secure locking. Black lock standard provided with 3006B handle (black anodized aluminum), silver comes with aluminum handle (3006M).

24h
SHIPPING

3
YEAR
WARRANTY

STAINLESS
STEEL

500 K
CYCLES




LOCK BOX COLOR OPTIONS



SPECIFICATIONS

- ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test
- Gate Lock with double cylinder dead bolt. Designed for 1-1/8" Mortise profile cylinder
- Fixing cylinder inch thread 1/4"
- Easy left or right changing of the self-latching daybolt
- Throw of the dead bolt, 7/8" in 1 turn of the key
- Key-operated self-latching bolt
- Adjustment of the bolts up to 3/8" continuous without removing the lock
- 4-hole mounting with two hex head socket screws
- Interchangeable with all Locinox surface mounted locks
- The lock box requires a 3-3/8" spacing to the first picket, fitting nicely into most gates

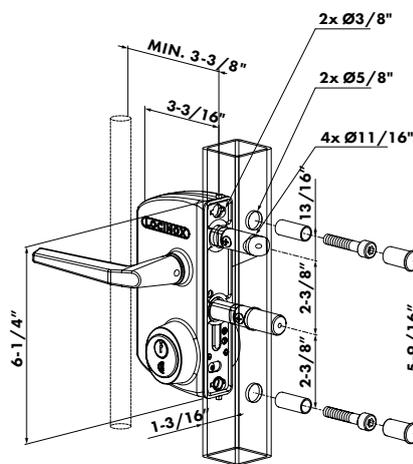

LOCKS FOR SWING GATES

RECOMMENDED KEEPS



SH-KLQF
P. 113



SAKLQF
P. 113



MODULEC-SA
P. 112

ORDER CODE

Profile width (Inch)	Square	Round
3/8" to 7/8"	•	
7/8" to 1-1/4"	•	
1-1/4" to 1-1/2"	•	
1-1/2" to 2"	•	
2" to 2-3/8"	•	
2-1/2" to 2-3/4"	•	

RECOMMENDED HANDLES



3006M
P. 190



3006FA
P. 192



3006B
P. 190

ACCESSORIES



ROLLTOP
P. 203



MULTITOOL
P. 176



MRT-118
P. 206



DRILLFIX
P. 177

LDKZD1

Surface mounted double cylinder gate lock for swing gates

Industrial swing gate lock with aluminum housing and stainless steel mechanism with 2 cylinders. You only need to use 1 of the cylinders in order to open or to close the lock. This lock is ideal to use to provide entry to third parties like fire men or waste collectors. The double locking of the solid stainless steel night bolt ensures a secure closing.



STAINLESS
STEEL




LOCK BOX COLOR OPTIONS

SILV 9005 7016 6005

SPECIFICATIONS

- ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test
- For gate profiles from 3/8" till 3-15/16"
- Stainless steel mechanism
- Non-adjustable latch and dead bolt
- Easy left or right changing of the self-latching daybolt
- Double throw of the night bolt 1"
- Key-operated self-latching bolt
- 4-hole mounting with two hex head socket screws
- Interchangeable with all Locinox surface mounted locks

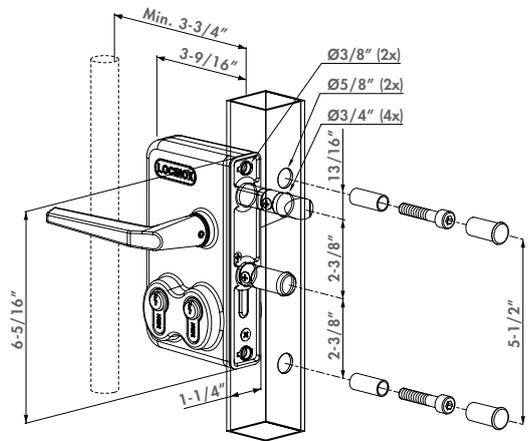

RECOMMENDED KEEPS



SAKLQF
P. 113



SH-KLQF
P. 113



MODULEC-SA
P. 112

ORDER CODES

Profile width (Inch)	Square	Round
3/8"	•	
1-1/4"	•	
1-1/2"	•	•
2"	•	•
2-1/2"	•	•
3"	•	
4"	•	

CYLINDERS AND ACCESSORIES



3012-POC
P. 206



3071
P. 208



DRILLFIX
P. 177



3970LA
P. 176



EN 179 LPKQU2

Surface mounted anti-panic gate lock



Stainless steel superior anti-panic lock with aluminum housing. EN179 certified configuration possible with LPKQ U2 for 1-9/16" & 2-3/8" gate frames with SAKL keep, 3006A-2 handle and 3012-54-STD- cylinder. Escape or exit from inside is possible at all times by operating the handle. Mechanical access from the outside is always possible by operating the cylinder. The 3/4" continuous adjustability of the bolts allows a perfect latching / locking of the mechanism. A solid stainless steel deadbolt with a 15/16" throw guarantees a secure locking. For a fast and highly precise installation, we recommend using the Drill-Fix drilling jig.

24h SHIPPING



STAINLESS STEEL




LOCK BOX COLOR OPTIONS



SPECIFICATIONS

- EN179 certified configuration available
- ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test
- Easy left or right changing of the self-latching daybolt
- Throw of the dead bolt, 7/8" in 1 turn of the key
- Key-operated self-latching bolt
- 4-hole mounting with two hex head socket screws
- Center distance bolts: 2-3/8"
- Continuous adjustment of the daybolt up to 3/4" without removing the lock box
- Stainless steel mechanism
- Tested up to 500 000 movements
- Panic function E / Switch function

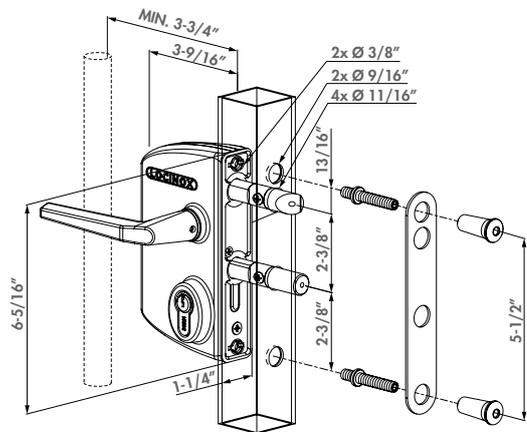

LOCKS FOR SWING GATES

RECOMMENDED KEEPS



SAKLQF
P. 113



SH-KLQF
P. 113



MODULEC-SA
P. 112

ORDER CODES

Profile width (Inch)	Square	Round
1-1/2" to 2-3/8"	•	
2-1/2" to 2-3/4"	•	
3" to 4"	•	
4" to 4-3/4"	•	

RECOMMENDED HANDLES



PUSHBAR-L
P. 187



3006PUSH
P. 186



3006A-2
P. 188



SHROUD-LA
P. 183

ACCESSORIES



ROLLTOP
P. 203



3970LA
P. 176



MULTITOOL
P. 176



DRILLFIX
P. 177



NEW **LNKQ** (Patent pending)

VOLTA - Surface mounted lock with external battery powered keypad



With VOLTA, you can easily add access control to your gate. This solution combines a surface mounted lock with a separate keypad, connected through the gate profile. The lock seamlessly fits into the modular Locinox hole pattern. You have the option to select, modify, or delete up to 100 PIN codes. Thanks to an energy-efficient battery set, which lasts for up to 150,000 open and close cycles in all weather conditions, there is no need for an external power supply. Available in two configurations: double with two keypads or single with one keypad and a free exit.



STAINLESS
STEEL



24h
SHIPPING




COLOR OPTIONS



SPECIFICATIONS

- Weatherproof and LED-illuminated electronic code keypad
- Double-sided or single-sided (free exit) with a separate battery module
- Energy efficient, with up to 150,000 open/close cycles on same set of batteries
- IP56
- Easy programming of up to 100 user codes
- Supports codes for permanently open and free exit
- Extremely strong and vandal proof design
- For 1-1/2" to 2-1/2" gate profiles
- Aluminium keypad: black powder coated or silver anodized
- Lock box available in various colors
- ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test

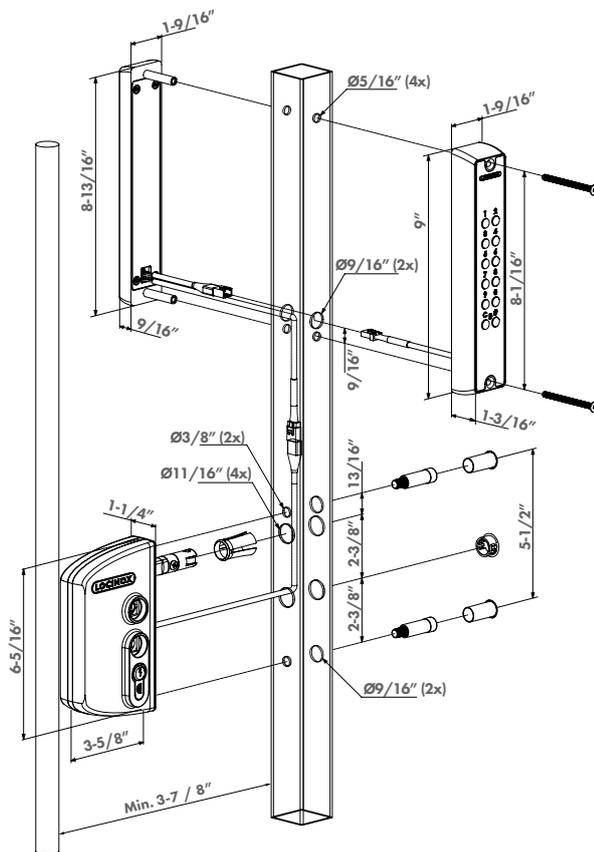

ORDER CODES

LNKQ40C1L For square 1-1/2" to 2-1/2" profiles - single sided **24h** SHIPPING

RECOMMENDED KEEPS



SAKLQF
P. 113



SH-KLQF
P. 113

LOCKS FOR
SWING GATES



LMKQV2 (Patented)

VINCI - Surface mounted mechanical code lock

High quality mechanical code lock for swing gates with aluminum housing and stainless steel mechanism. This lock is 100% mechanical, so no batteries or electricity are required, which makes it very easy to equip any gate with access control. The dead bolt is used to override the code panel and secure the gate. The latch and dead bolt have 3/4" continuous adjustment to allow perfect latching / locking of the mechanism. A stainless steel throw of 7/8" guarantees a secure locking. Ships standard with the Club handle pair. The latch gap required is keep dependent, but the standard and security keeps require a 1-1/4" latch gap.

24h
SHIPPING

3
YEAR
WARRANTY

STAINLESS
STEEL

500 K
CYCLES

100%
MECHANICAL

180°




LOCK BOX COLOR OPTIONS



SPECIFICATIONS

- Operational code panel on both sides
- ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test
- Independent entrance and exit codes
- Polyamide rain and dust cover
- Easy and fast set-up or modification of the access codes
- With adjustable rollerbolt for easy closing
- Extremely strong and user-friendly mechanism
- Automatic code reset after opening by means of the handle
- Anti-code detection with integrated security press plate
- Interchangeable with all Locinox surface mounted locks

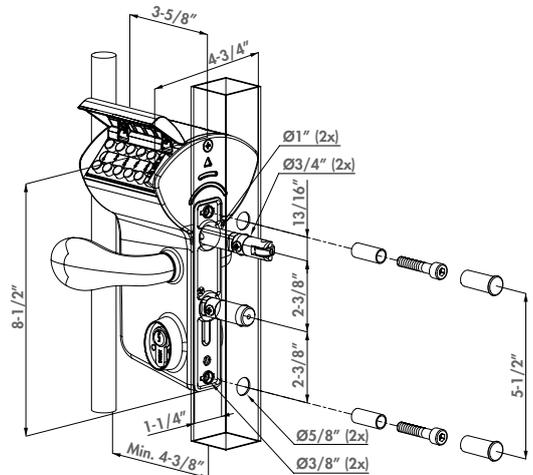

RECOMMENDED KEEPS



SAKLQF
P. 113



SH-KLQF
P. 113

ORDER CODES

Profile width (Inch)	Square	Round
3/8" to 1-1/4"	•	
1-1/4" to 2"	•	•
1-1/2" to 2-3/8"	•	•
2-1/2" to 2-3/4"	•	•
3" to 4"	•	•
4" to 4-3/4"	•	•

RECOMMENDED HANDLES



3006C
P. 189



3006I
P. 192



3006D
P. 191

COMPATIBLE WITH EVERY GATE CLOSER



SAMSON-2
P. 23



VERTICLOSE-2
P. 27



MAMMOTH180
P. 20



TIGER
P. 19



LFKQX1 (Patented)

FREE VINCI - Surface mounted mechanical code lock with secured entrance and free exit

One sided code mechanical code lock (Free Exit) for swing gates with aluminum housing and stainless steel mechanism. The Free Vinci offers you the ability to secure one side with a code for entrance while leaving the other side free for exit. This lock is 100% mechanical, so no batteries nor electricity are required, which makes it very easy to equip any gate with access control. The latch bolt has 3/4" continuous adjustment to allow perfect alignment of the locking mechanism. Ships standard with the Club handle for the secure "code" side and a round knob for the exit side. The PUSH handle is available for the exit side. The latch gap required is keep dependent, but the standard and security keeps require a 1-1/4" latch gap.

24h
SHIPPING



STAINLESS
STEEL




LOCK BOX COLOR OPTIONS



SPECIFICATIONS

- ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test
- Entrance secured by code, free exit
- Code panel with stainless steel push buttons on one side
- Polyamide rain and dust cover
- Easy and fast set-up or modification of the access codes
- With adjustable rollerbolt for easy closing
- Extremely strong and user-friendly mechanism
- Automatic code reset after opening by means of the handle
- Anti-code detection with integrated security press plate
- Interchangeable with all Locinox surface mounted locks

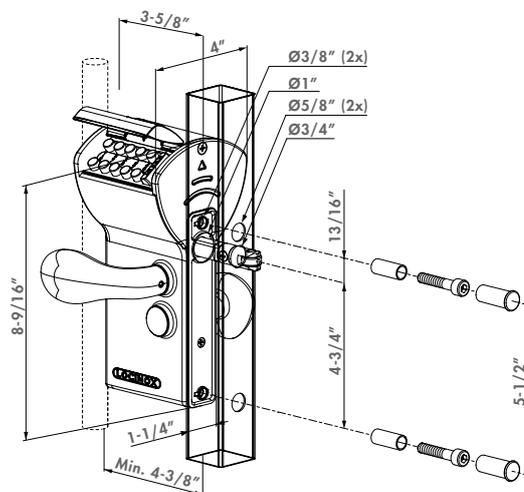

LOCKS FOR SWING GATES

RECOMMENDED KEEPS



SAKLQF
P. 113



SH-KLQF
P. 113

ORDER CODES

Profile width (Inch)	Square	Round
3/8" to 1-1/4"	•	
1-1/4" to 2"	•	•
1-1/2" to 2-3/8"	•	•
2-1/2" to 2-3/4"	•	•
3" to 4"	•	
4" to 4-3/4"	•	

ACCESSORIES



PUSHBAR-L
P. 187



3006PUSH
P. 186



SHROUD-LF
P. 183



LEKQU2 (Patented)

Surface mounted electric gate lock with Fail Open functionality

Electrical lock with aluminum housing and stainless steel mechanism. The lock functions as a "buzz in - buzz out" device and connects to any 12 Volt control system. The handles are blocked when the lock is powered. The dead bolt is used to override the control system and secure the gate. The latch and dead bolt have 3/4" continuous adjustment to allow perfect latching / locking of the mechanism. A stainless steel throw of 7/8" guarantees secure locking. Ships standard with the round knob handle set. The latch gap required is keep dependent, but the standard and security keeps require a 1-1/4" latch gap.

24h
SHIPPING

2
YEAR
WARRANTY

STAINLESS
STEEL

500 K
CYCLES

12V
AC/DC


180°

LOCK BOX COLOR OPTIONS



SPECIFICATIONS

- ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test
- Fail Open: Lock is open when power is interrupted
- Blocking or releasing of the handles
- Easy left or right changing of the self-latching daybolt
- Throw of the dead bolt, 7/8" in 1 turn of the key
- Key-operated self-latching bolt
- Continuous adjustment of the daybolt up to 3/4" without removing the lock box
- 4-hole mounting with two hex head socket screws
- Interchangeable with all Locinox surface mounted locks
- Voltage: 12V AC/DC
- Current: 0.3A

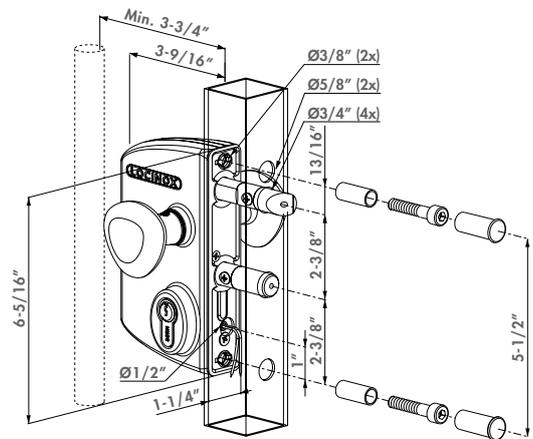

RECOMMENDED KEEPS



SAKLQF
P. 113



SH-KLQF
P. 113

ORDER CODES

Profile width (Inch)	Square	Round
1-1/4" to 2"	•	•
1-1/2" to 2-3/8"	•	•
2-1/2" to 2-3/4"	•	•
3" to 4"	•	

RECOMMENDED HANDLES & CABLE GUIDING



3006R
P. 191



DVK
P. 58



DVK-HD
P. 59

RECOMMENDED POWER SUPPLIES



DC-ACCESS-12V-20W
P. 60



AC-TRANS-12V-25W
P. 60



DC-POWER-12V-20W
P. 61



LIKQU2 (Patented)

Surface mounted electric gate lock with Fail Close functionality

Electric lock with aluminum housing and stainless steel mechanism. The lock functions as a "buzz in - buzz out" device and connects to any 12 Volt control system. The handles are blocked when the lock has no power (Fail Close). The dead bolt is used to override the control system and secure the gate. The latch and dead bolt have 3/4" continuous adjustment to allow perfect latching / locking of the mechanism. A stainless steel throw of 7/8" guarantees secure locking. Ships standard with the round knob handle set. The latch gap required is keep dependent, but the standard and security keeps require a 1-1/4" latch gap.



STAINLESS
STEEL




LOCK BOX COLOR OPTIONS

SILV 9005 7016 6009 6005 9010

SPECIFICATIONS

- ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test
- Fail Close: Lock is closed when power is interrupted
- Blocking or releasing of the handles
- Easy left or right hand changing
- Throw of the dead bolt, 7/8" in 1 turn of the key
- Key-operated self-latching bolt
- Continuous adjustment of the daybolt up to 3/4" without removing the lock box
- 4-hole mounting with two hex head socket screws
- Voltage: 12V AC/DC
- Current: 0.3A

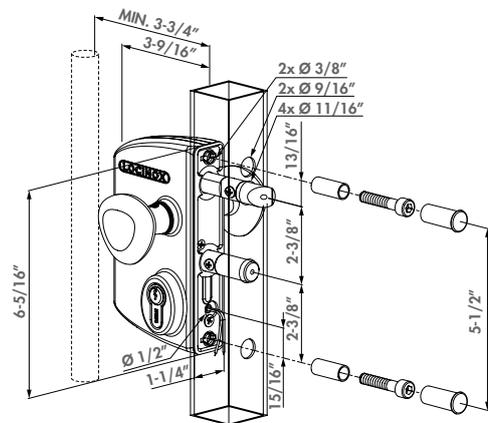

LOCKS FOR
SWING GATES

RECOMMENDED KEEPS



SAKLQF
P. 113



SH-KLQF
P. 113

ORDER CODES

Profile width (Inch)	Square	Round
1-1/4" to 2"	•	•
1-1/2" to 2-3/8"	•	•
2-1/2" to 2-3/4"	•	•
3" to 4"	•	

RECOMMENDED HANDLES & CABLE GUIDING



3006R
P. 191



DVK
P. 58



DVK-HD
P. 59

RECOMMENDED POWER SUPPLIES



DC-ACCESS-12V-20W
P. 60



AC-TRANS-12V-25W
P. 60



DC-POWER-12V-20W
P. 61



LAKYF2 (Patented)

Small surface mounted ornamental gate lock

Ornamental lock with aluminum housing and stainless steel mechanism. We recommend this lock as the standard for your ornamental gates as it only requires a 3-3/8" spacing to the first picket and will fit nicely into most gates. The latch and dead bolt have 3/8" continuous adjustment to allow perfect latching / locking of the mechanism. A stainless steel throw of 7/8" guarantees secure locking. Ships standard with the black zamac ornamental handle pair. The latch gap required is keep dependent, but the standard and security keeps require a 1-1/4" latch gap.

24h
SHIPPING

3
YEAR
WARRANTY

STAINLESS
STEEL

500 K
CYCLES




LOCK BOX COLOR OPTIONS



SPECIFICATIONS

- ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test
- Easy left or right changing of the self-latching daybolt
- Throw of the dead bolt, 7/8" in 1 turn of the key
- Adjustment of the bolts up to 3/8" continuous without removing the lock
- Key-operated self-latching bolt
- 4-hole mounting with two hex head socket screws
- Center distance bolts: 2-3/8"

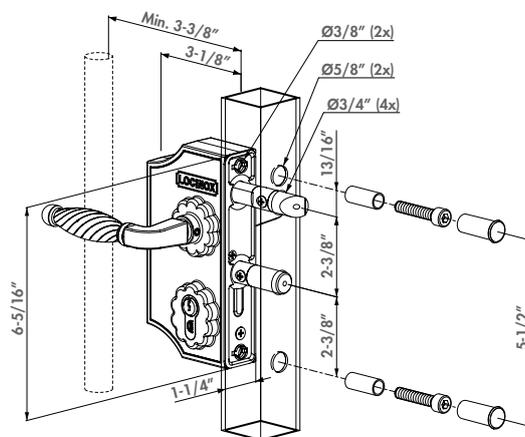

RECOMMENDED KEEPS



SPKZ-QF
P. 116



SPKZ-TK
P. 116



MODULEC-SA
P. 112

ORDER CODES

Profile width (Inch)	Square	Round
3/8" to 7/8"	•	
7/8" to 1-1/4"	•	
1-1/4" to 1-1/2"	•	
1-1/2" to 2"	•	
2" to 2-3/8"	•	
2-1/2" to 2-3/4"	•	

COMPATIBLE HANDLES



3006FA
P. 192



3006I
P. 192



KIDLOC
P. 186



3006B
P. 190

ORNAMENTAL HINGES



G-ORNA-LR
P. 147



G-ORNA-WP
P. 147

LOCKS FOR SWING GATES



LAKQH2 (Patented)

Large surface mounted ornamental gate lock

Ornamental lock with aluminum housing and stainless steel mechanism. We recommend this wider ornamental lock for gates that have 3-3/4" spacing to the first picket on ornamental gates. The latch bolt and dead bolt have 3/4" continuous adjustment to allow perfect alignment of the locking mechanism. A stainless steel throw of 7/8" guarantees secure locking. Ships standard with the black zamac ornamental handle pair. The latch gap required is keep dependent, but the standard and security keeps require a 1-1/4" latch gap.

24h
SHIPPING

3
YEAR
WARRANTY

STAINLESS
STEEL

500 K
CYCLES


180°

LOCK BOX COLOR OPTIONS

SILV **9005** **7016** **6009** **6005** **9010**


SPECIFICATIONS

- ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test
- Easy left or right changing of the self-latching daybolt
- Throw of the dead bolt, 7/8" in 1 turn of the key
- Continuous adjustment of the daybolt up to 3/4" without removing the lock box
- Key-operated self-latching bolt
- 4-hole mounting with two hex head socket screws
- Center distance bolts: 2-3/8"

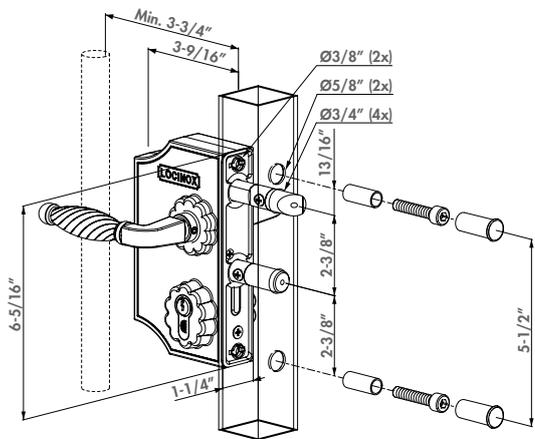

LOCKS FOR
SWING GATES

RECOMMENDED KEEPS



SPKZ-QF
P. 116



SPKZ-TK
P. 116



MODULEC-SA
P. 112

ORDER CODES

Profile width (Inch)	Square	Round
3/8" to 7/8"	•	
1-1/4" to 2"	•	•
1-1/2" to 2-3/8"	•	•
2-1/2" to 2-3/4"	•	•

COMPATIBLE HANDLES



3006FA
P. 192



3006D
P. 191



KIDLOC
P. 186



3006B
P. 190

ORNAMENTAL HINGES



G-ORNA-LR
P. 147



G-ORNA-WP
P. 147

LAKZP1

Surface mounted garden gate lock

Economical garden walk gate lock with polyamide housing and non-adjustable stainless steel mechanism. This lock is recommended for all your small gates and for residential gates where price is a driving issue. A stainless steel throw of 7/8" guarantees secure locking. Ships standard with the black poly handle pair. The latch gap required is keep dependent, but the SMKL polyamide keep requires a 1-1/8" latch gap.



STAINLESS
STEEL




LOCK BOX COLOR OPTIONS

9005 7040 7016 6009 6005 9010

SPECIFICATIONS

- Easy left or right changing of the self-latching daybolt
- Throw of the dead bolt, 7/8" in 1 turn of the key
- 4-hole mounting with two hex head socket screws
- Polyamide lock box and handles
- Center distance bolts: 2-3/8"
- For 1-1/2" gate profiles only
- Interchangeable with all Locinox surface mounted locks
- No key operation of the latch bolt

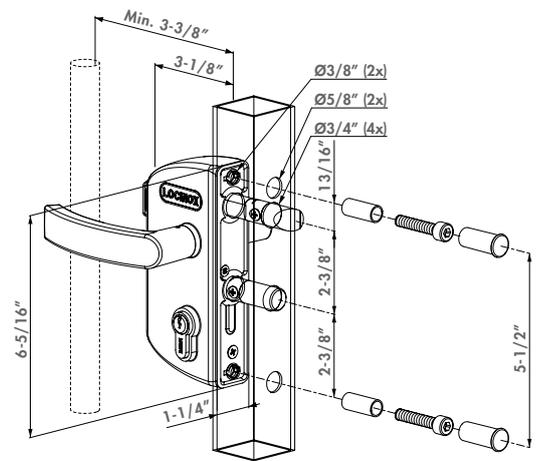

RECOMMENDED KEEPS



SMKLQF
P. 114

SKRZ
P. 114

SAKLQF
P. 113

ORDER CODES

Profile width (Inch)	Square	Round
1-1/2"	•	•

RECOMMENDED HANDLES



3006P
P. 192

3006G
P. 192

KIDLOC
P. 186

ACCESSORIES



3006PC
P. 115

3970LA
P. 176

DRILLFIX
P. 177

ROLLTOP
P. 203



LAKZPIWSI (Patented)

Surface mounted child safety lock

Child safety lock with non-adjusting stainless steel mechanism and polyamide housing. This lock conforms to the European swimming pool standard NF P90-306. The Kidloc handle set prevents the access to the pool for small children. The unique rollerbolt reduces latch resistance allowing the gate close easier. A stainless steel throw of 7/8" guarantees secure locking. Ships standard with the Kidloc handle pair. The latch gap required is keep dependent, but the SMKL polyamide keep requires a 1-1/8" latch gap.



STAINLESS STEEL



LOCK BOX COLOR OPTIONS

9005

7040

7016


6009

6005

9010

SPECIFICATIONS

- Stainless steel lock mechanism, Fixed, non-adjustable latch/dead bolts
- Polyamide lock box
- With adjustable rollerbolt for easy closing
- With Kidloc: child safety handle for swimming pools
- A complete package including a high quality stainless steel lock with a security knob and a stainless steel rollerbolt. Conforms to swimming pool standard NF P90-306

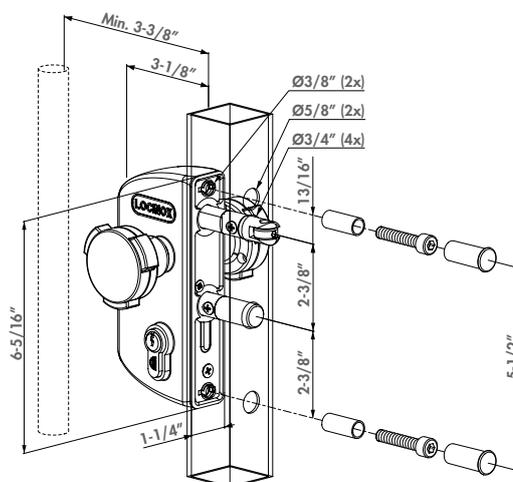

RECOMMENDED KEEPS



SMKLQF
P. 114



SKRZ
P. 114

ORDER CODE

Profile width (Inch)	Square	Round
1-1/2"	•	
2"	•	

RECOMMENDED GATE CLOSERS



TIGER
P. 19



MAMMOTH180
P. 20



LION
P. 24



SWING40
P. 153

ACCESSORIES



KIDLOC
P. 186



ROLLTOP
P. 203



3970LA
P. 176



DRILLFIX
P. 177

CHILD SAFETY LOCKS

FORTIMA (Patented)

Sleek & sturdy child safe magnetic latch for pools & parks

The Fortima is a magnetic child-safe gate latch that ensures safety, security and ease of entrance for single leaf gates. Fortima's patented internal leverage allows for smooth opening and, with its unmatched magnetic force, closes securely. The anodized aluminum and powder coated components make the Fortima as attractive as it is functional. Installation is easy on a wide range of gate materials and being compatible with most international code requirements, the Fortima can be rekeyed to match any existing lock.



24h
SHIPPING

LIMITED
LIFETIME
WARRANTY

-22°
+158°

QUICK-FIX

SELF
DRILLING

SQUARE
FRAMES


CHAIN LINK

COLOR OPTIONS

9005
24h
SHIPPING

SPECIFICATIONS

- Unique and extremely durable patented design with anodized aluminum housing
- Strongest magnetic force on the market: magnetic distance of 1-1/4" (2x industry standard!)
- Tested up to 2 million cycles - Limited Lifetime Warranty!
- Rekeyable to match any lock: Schlage-C Key-in-knob cylinder (5pin, drilled 6pin)
- Full vertical adjustability and 1" horizontal adjustability - a gap of 3/8" up to 1-3/8"
- Push down prevention: only opens when magnet is pulled up, adding additional security
- Perfect for metal, vinyl or wooden gates, available for round (R) and square (K) posts

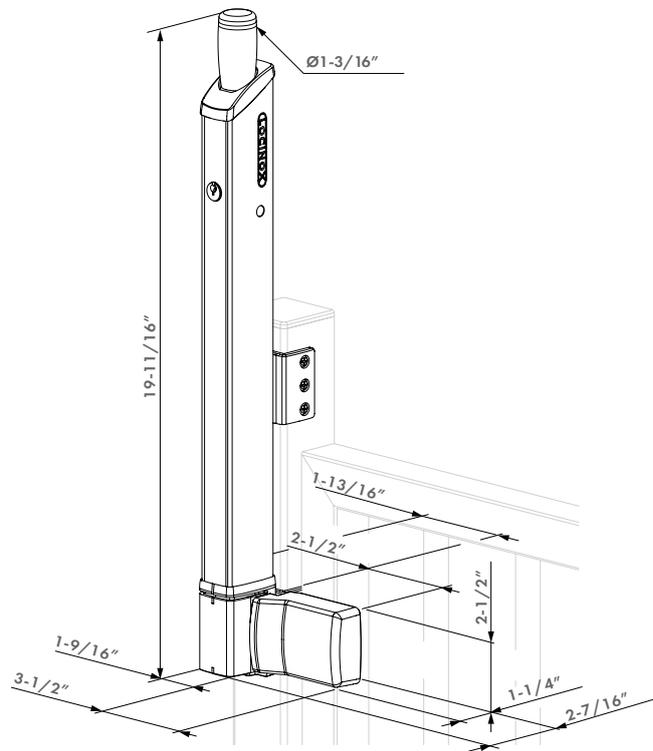

COMPATIBLE CYLINDERS



KIK-114
P. 206

3012-54-STD
P. 205

ORDER CODE

FORTIMA-SD-K	Child safe magnetic latch, with KIK cylinder and self-drilling screws for square posts 24h SHIPPING
FORTIMA-SD-R	Child safe magnetic latch, with KIK cylinder and self-drilling screws for round posts 24h SHIPPING
FORTIMA-QF	Child safe magnetic latch, with Europrofile cylinder and Quick-Fix bolts for square posts

COMPATIBLE GATE CLOSERS



TIGER
P. 19



SERVAL
P. 28



CARACAL
P. 29



SWING40
P. 153



GUARDIMA (Patented)

Sleek and sturdy child safe magnetic latch for pools and parks

The Guardima is a magnetic child-safe gate latch ensuring safety and security for single leaf gates. Guardima is installed on the gate and its patented internal leverage allows for smooth opening and closing, thanks to its unmatched magnetic force. The anodized aluminum and powder coated components make the Guardima as attractive as it is functional, adding elegance and value to your pool, park, playground or back yard. Thanks to Quick-Fix, installation is easy and firmly on a wide range of gate materials and is compatible with most international code requirements.




COLOR OPTIONS

9005

SPECIFICATIONS

- Magnetic latch installed on the gate
- Extreme weather resistance in any climate
- Unique and extremely durable patented design with anodized aluminum housing
- Strongest magnetic force on the market: magnetic distance of 1-1/4" (2x industry standard!)
- Tested up to 2 million cycles
- Full 1-3/16" vertical adjustability and 1-3/16" horizontal adjustability - a gap of 15/16" up to 1-3/4"
- Push down prevention: only opens when magnet is pulled up, adding additional security
- Meets international standards for pool gates (always confirm with the respective authorities)

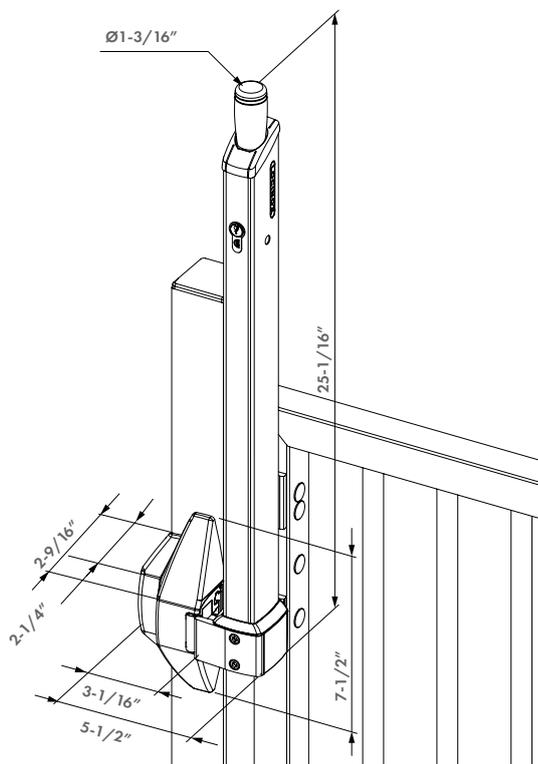

CHILD SAFETY LOCKS

COMPATIBLE CYLINDERS



3012-54-STD
P. 205

COMPATIBLE GATE CLOSERS



TIGER
P. 19



SERVAL
P. 28



CARACAL
P. 29



SWING40
P. 153

ORDER CODE

GUARDIMA-FM Sleek and sturdy child safe magnetic latch for pools and parks - Flush mounted

TWIST40 (Patented)

Swimming pool gate lock

The TWIST40 swimming pool gate lock has a stainless steel mechanism and black PA and powder coated aluminum housing. Installs into the gate upright at the top of the gate. The TWIST40 opens with a "press and twist" action which prevents the access to the pool for small children. The unique rollerbolt reduces latch resistance allowing the gate to close easier. This lock conforms to the European swimming pool standard NF P90-306. For gate profiles of 1-1/2" only. 16 Ga tube only.



24h
SHIPPING

3
YEAR
WARRANTY

STAINLESS
STEEL

500 K
CYCLES




LOCK BOX COLOR OPTIONS

9005
24h
SHIPPING

9010

SPECIFICATIONS

- Stainless steel lock mechanism
- Stainless steel rollerbolt: Reduces latch resistance and allows the gate close easier
- We strongly advise you to read the swimming pool standard NF P90-306 before manufacturing any swimming pool gate
- For 1-1/2" gate profiles only
- Maximum profile thickness: 5/64"

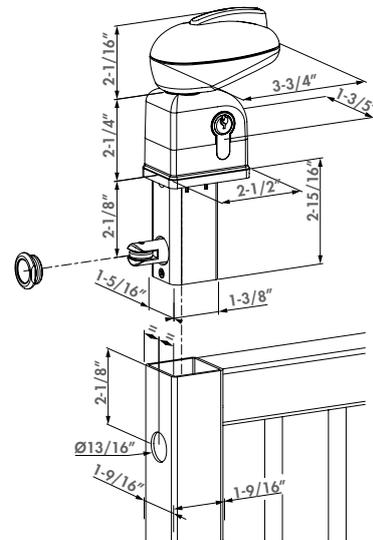

RECOMMENDED KEEPS



STKQF
P. 118



STR60 QF
P. 118

ORDER CODE

Profile width (Inch)	Square	Round
1-1/2"	•	

RECOMMENDED GATE CLOSERS



CARACAL
P. 29



TIGER
P. 19



LION
P. 24



SWING40
P. 153

COMPATIBLE HINGES



SERVAL
P. 28



GBM12
P. 154



GBM12-DP40
P. 154



GBM16-DP
P. 155



LLKZV2 (Patented)

LEONARDO - Mechanical code lock for sliding gates

Mechanical code lock for sliding gates with aluminum housing and stainless steel mechanism. Since this lock is 100% mechanical, no electricity or batteries are required, so this system gives you the opportunity to equip any sliding gate with access control. The dead bolt is used to override the code panel and secure the gate. The unique Twistfinger catch bolt and self-correcting keep ensures latching of your sliding gate. Catch bolts are available to fit gate frame profiles from 1-1/2" to 5" wide. Works with cantilever gate systems or fixed roller systems. Ships standard with the Club handle pair.

24h
SHIPPING

3
YEAR
WARRANTY

STAINLESS
STEEL

500 K
CYCLES

100 %
MECHANICAL

LOCK BOX COLOR OPTIONS

SILV
24h
SHIPPING


9005
24h
SHIPPING

7016

6005

SPECIFICATIONS

- 100% mechanical: no battery or electricity required
- Adjustable for horizontal or vertical mounting of the keep (catch bolt)
- Operational code panel on both sides
- Independent entrance and exit codes
- Equipped with dust and rain covers
- Easy and fast set-up or modification of the access codes
- Accepts 4 to 6 digit code combinations
- Extremely strong and user-friendly mechanism
- Automatic code reset after opening by means of the handle
- Anti-code detection with integrated security press plate
- Stainless steel collar around the Twistfinger prevents cutting through the Twistfinger (catch bolt)

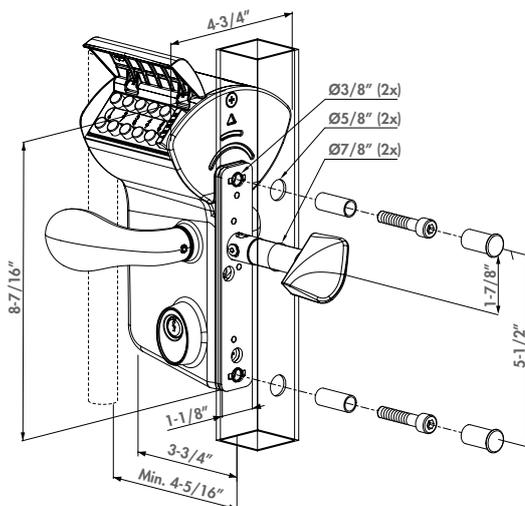

LOCKS FOR
SLIDING GATES

RECOMMENDED KEEPS



SSKZ QF
P. 117



O-SET
P. 117

ORDER CODES

Profile width (Inch)	Square	Round
1-1/2"	•	•
2"	•	
2-1/2"	•	
3"	•	
4"	•	
4-3/4"	•	

RECOMMENDED ACCESSORIES



3970LS
P. 176



DRILL HSS 15
P. 176



MULTITOOL
P. 176



LSKZU2 (Patent pending)

Surface mounted sliding gate lock

Slide gate lock for manual sliding gates with aluminum housing and stainless steel mechanism. The key is used to override the lever action and secure the gate. The unique Twistfinger catch bolt and self-correcting keep ensures latching of your sliding gate. Catch bolts are available to fit gate frame profiles from 1-1/2" to 5" wide. Works with cantilever gate systems or fixed roller systems.

24h
SHIPPING

3
YEAR
WARRANTY

STAINLESS
STEEL


500 K
CYCLES

LOCK BOX COLOR OPTIONS



SPECIFICATIONS

- ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test
- Chassis, mechanism and Twistfinger in stainless steel
- Adjustable for horizontal or vertical mounting of the keep (catch bolt)
- Mounting with 2 hex head socket screws
- Innovative closing system
- Stainless steel collar around the Twistfinger prevents cutting through the Twistfinger (catch bolt)
- Standard with reinforced aluminum handle pair
- 3006S: Square 10 mm shaft (appx 5/16")

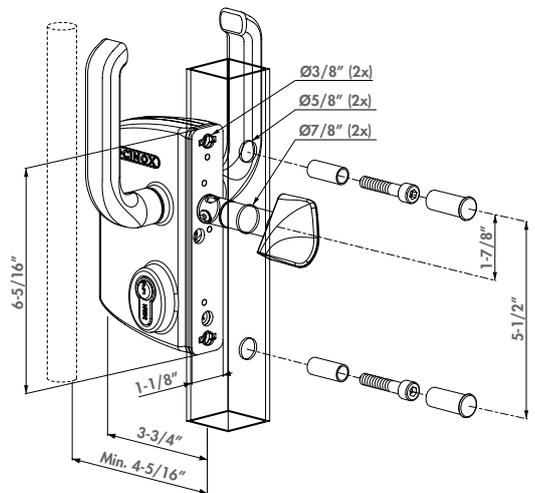

RECOMMENDED KEEPS



SSKZ QF
P. 117



O-SET
P. 117

ORDER CODES

Profile width (Inch)	Square	Round
1-1/2"	•	•
2"	•	•
2-1/2"	•	•
3"	•	•
4"	•	•
4-3/4"	•	•

RECOMMENDED HANDLE & ACCESSORIES



3006S
P. 191



3970LS
P. 176



DRILL HSS 15
P. 176



MULTITOOL
P. 176



LGKZD1

Double cylinder lock

Industrial sliding gate lock with aluminum housing and stainless steel mechanism with 2 cylinders. You only need to use 1 of the cylinders in order to open or to close the lock. This lock is ideal to use to provide entry to third parties like the firemen or waste collectors.



STAINLESS
STEEL




LOCK BOX COLOR OPTIONS

SILV 9005 7016 6005

SPECIFICATIONS

- ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test
- For gate profiles from 1-1/2" until 4-3/4"
- Chassis, mechanism and Twistfinger in stainless steel
- Adjustable for horizontal or vertical mounting of the keep (catch bolt)
- Innovative closing system
- Stainless steel collar around the Twistfinger prevents cutting through the Twistfinger (catch bolt)
- 3-hole mounting with two hexagon socket head screws
- Exchangeable with Locinox LS-Locks
- Standard with reinforced aluminum handle pair

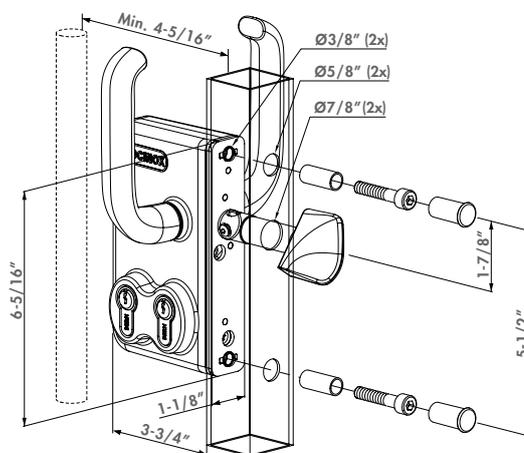

LOCKS FOR
SLIDING GATES

RECOMMENDED KEEPS



SSKZ QF
P. 117



O-SET
P. 117

ORDER CODES

Profile width (Inch)	Square	Round
1-1/2"	•	•
2"	•	•
2-1/2"	•	•
3"	•	•
4"	•	•
4-3/4"	•	•

CYLINDERS AND ACCESSORIES



3012-POC
P. 206



3071
P. 208



3006S
P. 191

Uniwing

Universal profile preparation for the full range of insert locks, keeps and accessories

Preparation
for insert lock
and keep range

FORTYLOCK

FIFTYLOCK

SIXTYLOCK

EIGHTYLOCK



3020-HYB

3025-HYB

HYB-BLIND



VERA



VITA



3006C

3006-HOLD

3006-PAD



One preparation for multiple solutions

How can you simplify, speed up, and reduce the costs of gate production and installation? The UNIWING concept offers a uniform profile preparation for both gate wings (or a single gate wing and a fixed post) as a comprehensive solution for the insert lock range. The rectangular cutout (6 15/16" x 7/8") with crescent shapes at the top and bottom makes it easy to install both insert locks and insert keeps with the Click-It system. Upgrades, such as cover plates, aesthetic handles, or access control through mechanical or electronic keypads, are always possible.



TWO TYPES OF INTEGRATED HANDLES

FORTYLOCK (Patented)

Mortise lock with 3/4" backset for profiles of 1-9/16" or more

Mortise lock with 100% stainless steel mechanism. The stainless steel adjustable self-latching bolt and hook combined with the right keep guarantee a strong and solid closed gate where the gate wings can not be pulled apart or forced open. The lock can be installed on metal, aluminum and PVC gates. Thanks to the patented "Click-It" system, installing the lock can be done in a matter of seconds.



24h
SHIPPING




STAINLESS
STEEL



SPECIFICATIONS

- Lock mechanism with cover plate protects against dirt penetration
- Patented "Click-It" system makes thread tapping unnecessary
- Continuous adjustment of the daybolt up to 3/8" without dismounting the lock box
- Key-operated self-latching bolt
- Stainless steel mechanism, hook, front plate and latch bolt
- Easy left or right changing of the self-latching daybolt
- Throw of the hook: 13/16"
- The center distance between the cylinder and the handle: 3-5/8"
- Optional: cover shield for handle & cylinder holes in aluminum, polyamide or stainless steel
- Handles to be ordered separately
- Compatible with all Europrofile cylinders
- UNIWING-compatible

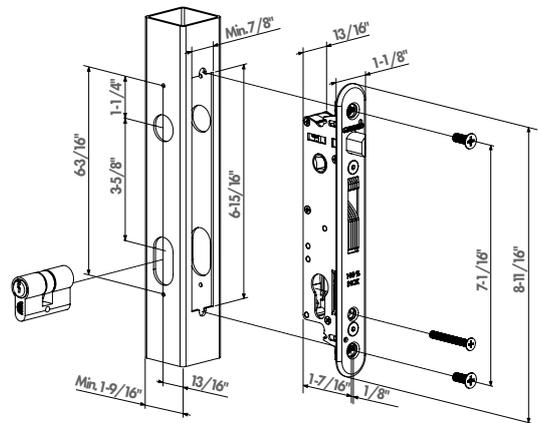

RECOMMENDED KEEPS



MODULEC-SF
P. 124



SFKO
P. 121



SFKU
P. 122

ORDER CODE

FORTYLOCK Insert lock with 3/4" backset for profiles of 1-1/2" or more **24h** SHIPPING

OPTIONAL COVER SHIELDS



3020-HYB-A2
P. 105



3020-HYB-ALU
P. 105



3025-HYB
P. 105

RECOMMENDED HANDLES



3006M-H
P. 193



3006J-H
P. 193



3006B-H
P. 193



3006FIX
P. 184

FIFTYLOCK (Patented)

Mortise lock with 1-3/16" backset for profiles of 2" or more

Prime insert lock with 100% stainless steel mechanism. The stainless steel, adjustable self-latching bolt and hook combined with the correct keep guarantee a strong and solid closed gate where the gate wings can not be pulled apart or forced open. The lock can be installed on metal, aluminum and PVC gates. Thanks to the patented "Click-It" system the lock is mounted in seconds.



24h
SHIPPING




STAINLESS
STEEL



SPECIFICATIONS

- Stainless steel lock mechanism with cover plate against dirt penetration
- Stainless steel mechanism, hook, front plate and latch bolt
- Backset 1-3/16", for mounting in profiles of 2" or more
- Continuous adjustment of the daybolt up to 3/8" without dismantling the lock box
- Key-operated self-latching bolt
- Easy left or right changing of the self-latching daybolt
- Throw of the hook: 13/16"
- The center distance between the cylinder and the handle: 3-5/8"
- Compatible with all Europrofile cylinders
- Handles to be ordered separately
- Optional: cover shield for handle & cylinder holes in aluminum, polyamide or stainless steel
- UNIWING-compatible

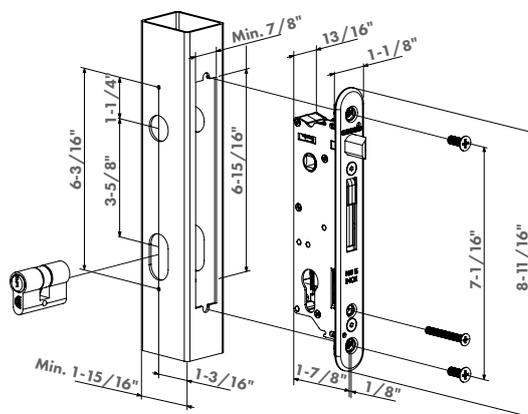

MORTISE LOCKS

RECOMMENDED KEEPS



MODULEC-SF
P. 124



SFKO
P. 121



SFKU
P. 122

ORDER CODE

FIFTYLOCK Mortise lock with 1-3/16" backset for profiles of 2" or more **24h** SHIPPING

OPTIONAL COVER SHIELDS



3020-HYB-A2
P. 105



3020-HYB-ALU
P. 105



3025-HYB
P. 105

RECOMMENDED HANDLES



3006M-H
P. 193



3006J-H
P. 193



3006B-H
P. 193



3006FIX
P. 184

SIXTYLOCK (Patented)

Insert lock with 1-9/16" backset for profiles of 2-3/8" or more

Prime insert lock with 100% stainless steel mechanism. The stainless steel, adjustable self-latching bolt and hook combined with the right keep guarantee a strong and solid closed gate where the gate wings can not be pulled apart or forced open. The lock can be installed on metal, aluminum and PVC gates. Thanks to the patented "Click-It" system the lock is mounted in seconds.



24h
SHIPPING




STAINLESS
STEEL



SPECIFICATIONS

- Stainless steel lock mechanism with cover plate against dirt penetration
- Stainless steel mechanism, hook, front plate and latch bolt
- Backset 1-9/16", for mounting in profiles of 2-3/8" of depth or more
- Continuous adjustment of the daybolt up to 3/8" without dismounting the lock box
- Key-operated self-latching bolt
- Easy left or right changing of the self-latching daybolt
- Throw of the hook: 13/16"
- The center distance between the cylinder and the handle: 3-5/8"
- Available with 2-1/8", 2-3/8", and 3-1/8" cylinder
- Handles to be ordered separately
- Optional: cover shield for handle & cylinder holes in aluminum, polyamide or stainless steel
- UNIWING-compatible

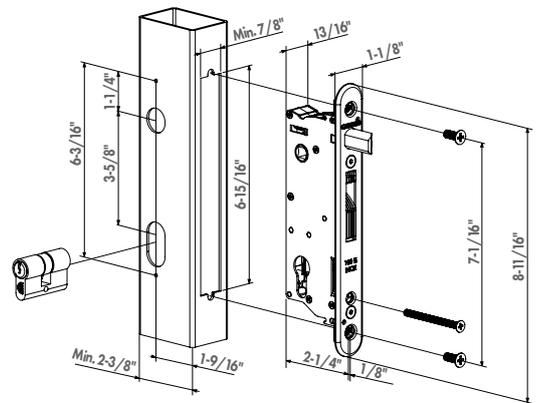

RECOMMENDED KEEPS



SFKB
P. 120



INTRALEC
P. 124



SFKM
P. 122

ORDER CODE

SIXTYLOCK Insert lock with 1 9/16" backset for profiles of 2 3/8" or more **24h** SHIPPING

OPTIONAL COVER SHIELDS



3020-HYB-A2
P. 105



3020-HYB-ALU
P. 105



3025-HYB
P. 105

RECOMMENDED HANDLES



3006M-H
P. 193



3006B-H
P. 193



3006J-H
P. 193



3006PAD-H
P. 194



EIGHTYLOCK (Patented)

Insert lock with 2-3/8" backset for profiles of 3-1/8" or more

Prime insert lock with 100% stainless steel mechanism. The stainless steel, adjustable self-latching bolt and hook combined with the right keep guarantee a strong and solid closed gate where the gate wings can not be pulled apart or forced open. The lock can be installed on metal, aluminum, wooden and PVC gates. Thanks to the patented "Click-It" system the lock is mounted in seconds.




STAINLESS STEEL



SPECIFICATIONS

- Stainless steel lock mechanism with cover plate against dirt penetration
- Stainless steel mechanism, hook, front plate and latch bolt
- Backset 2-3/8", for mounting in profiles of 3-1/8" of depth or more
- Continuous adjustment of the daybolt up to 3/8" without dismounting the lock box
- Key-operated self-latching bolt
- Easy left or right changing of the self-latching daybolt
- Throw of the hook: 13/16"
- The center distance between the cylinder and the handle: 3-5/8"
- Available with 2-1/8", 2-3/8", and 3-1/8" cylinder
- Handles to be ordered separately
- Perfect for wooden gates
- UNIWING-compatible

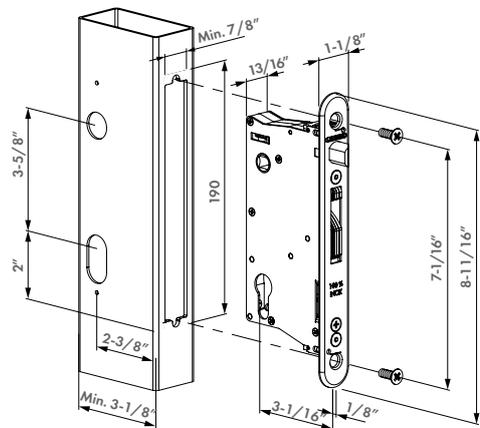

RECOMMENDED KEEPS



SFKM
P. 122



MODULEC-SF
P. 124



INTRALEC
P. 124

ORDER CODES

EIGHTYLOCK-M	Insert lock with 2-3/8" backset for profiles of 3-1/8" or more for metal gates
EIGHTYLOCK-W	Insert lock with 2-3/8" backset for profiles of 3-1/8" or more for wooden gates

OPTIONAL COVER SHIELDS



3020-HYB-A2
P. 105



3020-HYB-ALU
P. 105



3020-HYB-STD
P. 105

RECOMMENDED HANDLES



3006M-H
P. 193



3006B-H
P. 193



3006J-H
P. 193



3006PAD-H
P. 194



FORTYSET

Complete insert lock set with keep for metal, vinyl or aluminum gates

Complete set to equip your metal, PVC or aluminum gates with a stainless steel insert lock and keep.

SPECIFICATIONS

- Complete set with lock, keep, cover plates, handles and cylinder
- 54 mm (2-1/8") Europrofile cylinder with three keys

ORDER CODES

FORTYSET-40I-BA	Fortylock + SFKI + 3020-HYB-ALU-9005 + 3006B-H + 3012-54-STD-VSZ
FORTYSET-40I-JA	Fortylock + SFKI + 3020-HYB-ALU-SILV + 3006J-H + 3012-54-STD-VSZ
FORTYSET-40I-MA	Fortylock + SFKI + 3020-HYB-ALU-SILV + 3006M-H + 3012-54-STD-VSZ
FORTYSET-40P-GP	Fortylock + SFKP + 3020-HYB-STD + 3006G + 3012-54-STD-VSZ
FORTYSET-40S-BA	Fortylock + SFKU-40-9005 + 3020-HYB-ALU-9005 + 3006B-H + 3012-54-STD-VSZ
FORTYSET-40S-JA	Fortylock + SFKU-40-ALUM + 3020-HYB-ALU-SILV + 3006J-H + 3012-54-STD-VSZ



FIFTYSET

Complete Fiftylock insert set with keep for metal, PVC or aluminum gates

Complete Fiftylock set to equip your metal, PVC or aluminum gates with a stainless steel insert lock and keep.

SPECIFICATIONS

- Complete set with Fiftylock, keep, cover plates, handles and cylinder
- 60 mm (2-3/8") Europrofile cylinder with three keys

ORDER CODES

FIFTYSET-50S-BA	Fiftylock + SFKU-40-9005 + 3020-HYB-ALI-9005 + 3006B-H + 3012-60-STD-VSZ
FIFTYSET-50U-JA	Fiftylock + SFKU-40-ALUM + 3020-HYB-ALU + 3006J-H + 3012-60-STD-VSZ



SIXTYSET

Complete Sixtylock insert set with keep for metal, PVC or aluminum gates

Complete Sixtylock set to equip your metal, PVC or aluminum gates with a 3/8" adjustable, stainless steel insert lock and keep.

SPECIFICATIONS

- Complete set with Sixtylock, keep, cover plates, handles and cylinder
- 80 mm (3-1/8") Europrofile cylinder with three keys

ORDER CODES

SIXTYSET-60U-JA	Sixtylock + SFKU-40-ALUM + 3020-HYB-ALU-SILV + 3006J-H + 3012-70-STD-VSZ
SIXTYSET-60S-BA	Sixtylock + SFKU-9005 + 3020-HYB-ALU-9005 + 3006B-H + 3012-70-STD-VSZ



MORTISE LOCKS



LOCINOX

100%
INOX





NEW **VERA** (Patent pending)



VERA - Battery powered code lock for insert locks

Add access control to pedestrian gates easily with VERA, a battery-powered code lock for gates with insert locks (FORTY-, FIFTY-, SIXTY- or EIGHTYLOCK). Easily select, change or delete up to 100 PIN codes. Various entry and exit codes, permanently open codes and free exit are possible. The energy-efficient VERA achieves up to 150,000 open/close cycles with one battery pack, in all weather conditions (IP66). The maintenance-free code lock features aluminum housing and an LED-illuminated electronic code keypad.

24h
SHIPPING



BATTERY
POWERED

COLOR OPTIONS



SPECIFICATIONS

- Compatible with FORTY-, FIFTY-, SIXTY- or EIGHTYLOCK (lock not included)
- Compatible with the SFKV-V or SFKV-O keep
- Double-sided keypad or single-sided keypad (free exit) with cover plate
- No mains power required. Battery pack (with a lifespan of up to 150,000 cycles) included
- Weatherproof and LED-illuminated electronic code keypad
- Supports codes for permanently open and free exit
- Different entrance and exit codes possible
- Low battery warning light
- Aluminum housing with textured paint (black) or anodization (silver)

ORDER CODES

VERA-40-1	For profiles with 1-1/2" depth - single sided	24h SHIPPING
VERA-40-2	For profiles with 1-1/2" depth - double sided	24h SHIPPING
VERA-50-1	For profiles with 2" depth - single sided	24h SHIPPING
VERA-50-2	For profiles with 2" depth - double sided	24h SHIPPING
VERA-60-1	For profiles with 2-1/2" depth - single sided	24h SHIPPING
VERA-60-2	For profiles with 2-1/2" depth - double sided	24h SHIPPING

COMPATIBLE LOCKS



FORTYLOCK
P. 94



FIFTYLOCK
P. 95



SIXTYLOCK
P. 96



EIGHTYLOCK
P. 97

MORTISE LOCKS

NEW **VITA** (Patent pending)

Mechanical code lock for insert locks

Simple, maintenance-free access control for gates equipped with an insert lock. The VITA is a mechanical code lock that operates without electricity, compatible with FORTY-, FIFTY-, SIXTY-, and EIGHTYLOCK. The PIN code can be easily changed or removed, and both entry and exit codes can be set independently. Available in two configurations: a double version with a keypad on both sides, or a single version with one keypad and a free exit.



24h
SHIPPING



STAINLESS
STEEL



COLOR OPTIONS



SPECIFICATIONS

- Double-sided keypad or single-sided keypad (free exit) with cover plate
- Independent entrance and exit codes
- Easy and fast set-up or modification of the access codes
- Extremely strong and vandal proof design
- Aluminum housing with textured paint (black) or anodization (silver)
- Anti-code detection with integrated security press plate
- Compatible with SFKU-V & SFKO-V
- Compatible with FORTY-, FIFTY-, SIXTY- or EIGHTYLOCK (lock not included)
- UNIWING-compatible

ORDER CODES

VITA-40-1	For profiles with 1-1/2" depth - single sided	24h SHIPPING
VITA-40-2	For profiles with 1-1/2" depth - double sided	24h SHIPPING
VITA-50-1	For profiles with 2" depth - single sided	24h SHIPPING
VITA-50-2	For profiles with 2" depth - double sided	24h SHIPPING
VITA-60-1	For profiles with 2-1/2" depth - single sided	24h SHIPPING
VITA-60-2	For profiles with 2-1/2" depth - double sided	24h SHIPPING

COMPATIBLE LOCKS



FORTYLOCK
P. 94

FIFTYLOCK
P. 95

SIXTYLOCK
P. 96

EIGHTYLOCK
P. 97



H-METAL (Patented)


Mortise lock for ornamental gates

Mortise lock with 100% stainless steel mechanism. This model can be installed on steel, aluminum, or wood gates. The massive stainless steel hook and adjustable latch bolt makes this a one of a kind lock. The combination of the hook (dead bolt) with the SHKM or SHKW keep provides a secure anchoring of your gate while preventing the gate from being pried open as the dead bolt's "hook" locks into the keep's anchoring plate. These locks can be used on metal, wood or aluminum gates or even with our fully prepared profiles. The latch gap required is keep dependent, but the SHKM Hybrid keep requires a 7/8" latch gap.



SPECIFICATIONS

- Easy left or right changing of the self-latching daybolt
- Key-operated self-latching bolt
- Adjustment of the latch bolt up to 3/4" continuous without removing the lock
- Stainless steel mechanism, hook, front plate and latch bolt
- Handles to be ordered separately
- Throw of the hook: 1-1/4"
- The center distance between the cylinder and the handle: 3-5/8"
- Hook in combination with the keep provides secure anchoring
- With coverplate for lock mechanism protection against dirt penetration inside the posts
- Available with 2-1/8", 2-3/8", and 3-1/8" cylinder
- Cover shield for handle & cylinder holes to be ordered separately

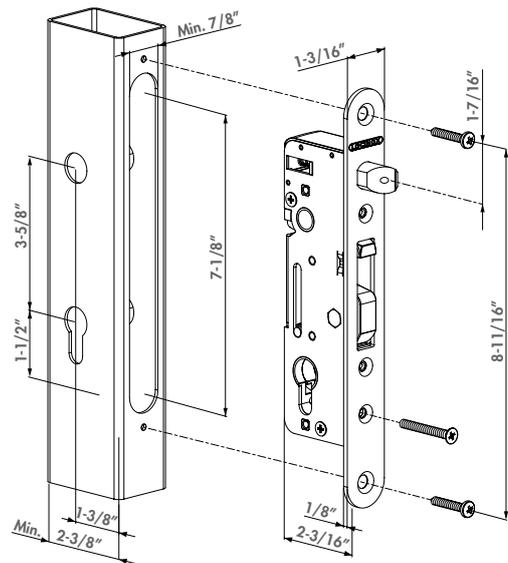

ORDER CODE

H-METAL For profiles with a min. depth of 2-1/2" 24h SHIPPING



H-METAL-SET

Complete, stainless steel insert lock set for metal and aluminum gates

Complete set to equip your metal or aluminum gates with a 3/4" adjustable, stainless steel insert lock and adjustable keep.

ORDER CODES

H-METAL-SET-54-I	H-METAL + SHKM-ALUM + 3020-HYB-A2 + 3006I-H + 3012-54-STD-VSZ
H-METAL-SET-54-M	H-METAL + SHKM-ALUM + 3020-HYB-STD + 3006M-H + 3012-54-STD-VSZ
H-METAL-SET-80-I	H-METAL + SHKM-ALUM + 3020-HYB-A2 + 3006I-H + 3012-80-STD-VSZ
H-METAL-SET-80-M	H-METAL + SHKM-ALUM + 3020-HYB-STD + 3006M-H + 3012-80-STD-VSZ




H-COMPACT (Patented)

Mortise Lock without handle for sliding and swing gates

Mortise lock with 100% stainless steel mechanism. This model is specially designed for mechanical closure of sliding gates and double leaf swinging gates. It can be used for manual locking of automated slide gates. The absence of a handle prevents people from climbing over the fence using the handle as a step. The latch gap required is keep dependent, but the SHKC Hybrid keep requires a 3/8" latch gap.

SPECIFICATIONS

- Insert lock with a backset of 1-3/8"
- Suitable for swing and sliding gates
- Mechanism, hook, front plate, chassis and all internal mechanical parts are 100% stainless steel
- Throw of the hook: 1-1/4"
- Hook in combination with the keep provides secure anchoring
- Without latch bolt
- (Removable) pin prevents lifting the hook from the keep when used in a sliding gate
- With coverplate for lock mechanism protection against dirt penetration inside the posts
- Compatible with all Europrofile cylinders

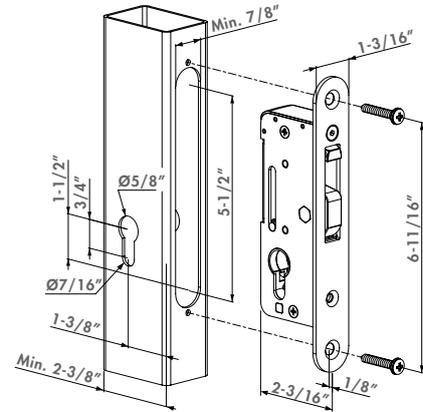

RECOMMENDED KEEP



ORDER CODE

H-COMPACT For profiles with a min. depth of 2-1/2"

SHKC
P. 125



24h
SHIPPING


H-METAL-WB (Patented)

Mortise lock for ornamental gates, fits welding lock box

Mortise lock with 100% stainless steel mechanism. This model can be installed on steel or aluminum gates and fits perfectly into our custom welding box. The massive stainless steel hook and adjustable latch bolt makes this a one of a kind lock. The combination of the hook (dead bolt) with the SHKM or SHKW keep provides a secure anchoring of your gate while preventing the gate from being pried open as the dead bolt's "hook" locks into the keep's anchoring plate. The latch gap required is keep dependent, but the SHKM Hybrid keep requires a 7/8" latch gap.

SPECIFICATIONS

- Insert lock with a backset of 1-3/8"
- Easy left or right changing of the self-latching daybolt
- Key-operated self-latching bolt
- Adjustment of the latch bolt up to 3/4" continuous without removing the lock
- Stainless steel mechanism, hook, front plate and latch bolt
- Throw of the hook: 1-1/4"
- The center distance between the cylinder and the handle: 3-5/8"
- Hook in combination with the keep provides secure anchoring
- With coverplate for lock mechanism protection against dirt penetration inside the posts
- Available with 2-1/8", 2-3/8", and 3-1/8" cylinder
- Handles to be ordered separately
- Cover shield for handle & cylinder holes to be ordered separately

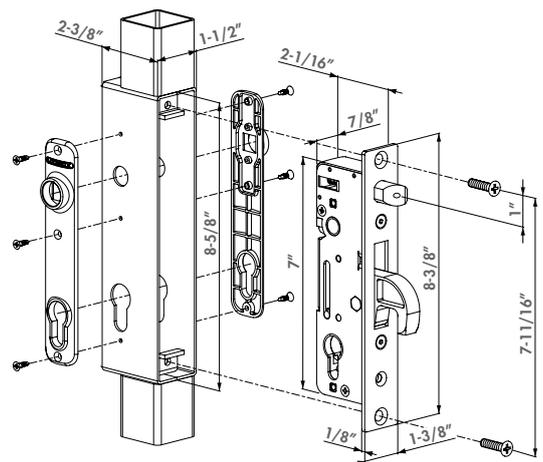

RECOMMENDED KEEPS



ORDER CODE

H-METAL-WB For hybrid welding lock box - HWLB **24h** SHIPPING

SHKM
P. 126

SEH
P. 111



3020-HYB

Cover shield for mortise locks

Cover shield for handle & cylinder holes of Locinox mortise locks. Available in aluminum, stainless steel or polyamide for an aesthetic finish.


24h
SHIPPING

COLOR OPTIONS



SPECIFICATIONS

- Cover shield for handle & cylinder holes
- Standardised gate pattern: compatible with HWLB for Hybrid locks
- Available in polyamide, aluminum and stainless steel

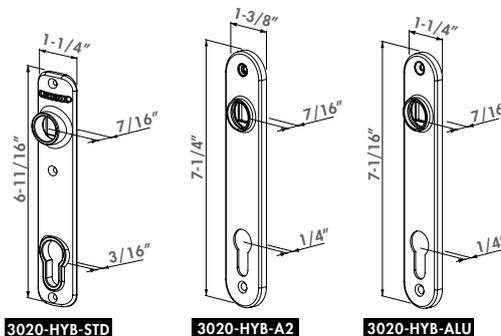

COMPATIBLE LOCKS



ORDER CODES

3020-HYB-A2	Stainless steel cover shields for mortise locks	24h SHIPPING
3020-HYB-ALU	Aluminum cover shield for mortise locks - Silver / RAL9005	24h SHIPPING
3020-HYB-STD	Polyamid cover shields for mortise locks - RAL9005	24h SHIPPING

H-METAL
P. 103

FORTYLOCK
P. 94

SIXTYLOCK
P. 96

EIGHTYLOCK
P. 97



24h
SHIPPING

3025-HYB

Aluminum anodized cover plate for insert locks


Aluminum anodized cover plate for handle hole and cylinder of Locinox insert locks. Attaches transversely through the post. Screws included.

COLOR OPTIONS



SPECIFICATIONS

- Cover plate for handle hole and cylinder
- Anodized aluminum
- Available in two colors: RAL 9005 & SILV
- Includes mounting bolts for profiles from 1-7/16" to 2-9/16"

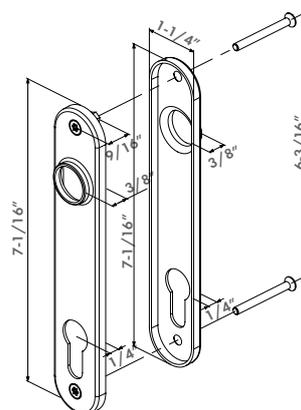

COMPATIBLE LOCKS



ORDER CODE

3025-HYB	Aluminum anodized cover plate for insert locks	24h SHIPPING
----------	--	------------------------

FORTYLOCK
P. 94

FIFTYLOCK
P. 95

SIXTYLOCK
P. 96



24h
SHIPPING

3025-HYB-BLIND-ALU

Set of cover plates for insert locks


Set of cover plates for half handle and cylinder for Locinox insert locks. Attaches transversely through the post. Available in stainless steel and anodized aluminum. Screws included.

COLOR OPTIONS



SPECIFICATIONS

- Cover plate for handle hole and cylinder
- Available in stainless steel or anodized aluminum
- Compatible with BAR-A and BAR-I
- Includes mounting bolts for profiles from 1-7/16" to 2-9/16"

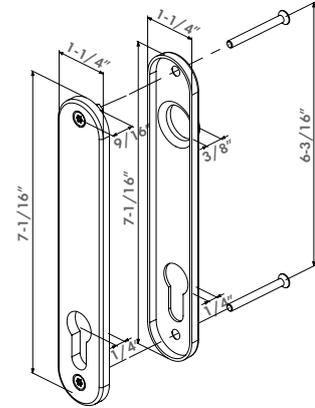

COMPATIBLE LOCKS



FORTYLOCK
P. 94



FIFTYLOCK
P. 95



SIXTYLOCK
P. 96

ORDER CODE

3025-HYB-BLIND-ALU Set of cover plates for insert locks **24h** SHIPPING



24h
SHIPPING


HWLB

Weldable lock box for H-METAL-WB

Metal welding box for hybrid Mortise lock.

SPECIFICATIONS

- Size: 2-3/8" x 1-9/16" x 8-5/8" (5/64" thickness, 14 gauge)
- Black steel for welding

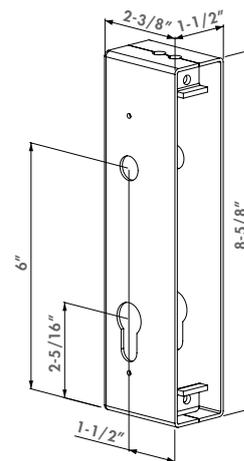

COMPATIBLE LOCKS



H-METAL-WB
P. 104



SHKM
P. 126



3020-HYB-ALU
P. 105



3020-HYB-STD
P. 105

ORDER CODE

HWLB Mild steel welding lock box for H-METAL-WB lock **24h** SHIPPING



H-WOOD (Patented)

Mortise lock for wooden gates

Mortise lock with 100% stainless steel mechanism. This model is specially designed for wood gates. The adjustable latch bolt in combination with the stainless steel hook (dead bolt) provides extra security. The combination of the hook (dead bolt) with the SHKW keep provides a secure anchoring of your gate while preventing the gate from being pried open as the dead bolt's "hook" locks into the keep's anchoring plate. The latch gap required is keep dependent, but the SHKW Hybrid keep requires a 7/8" latch gap.

24h
SHIPPING

3
YEAR
WARRANTY


STAINLESS
STEEL

500 K
CYCLES

180°

SPECIFICATIONS

- Easy left or right changing of the self-latching daybolt
- Key-operated self-latching bolt
- Adjustment of the latch bolt up to 3/4" continuous without removing the lock
- Stainless steel mechanism, hook, front plate and latch bolt
- Stainless steel hook for night locking (dead bolt)
- Throw of the hook: 1-1/4"
- The center distance between the cylinder and the handle: 3-5/8"
- 2-3/8" backset handle
- Lock mechanism with cover plate protects against dirt penetration
- Compatible with all Europrofile cylinders
- Handles to be ordered separately
- Cover shield for handle & cylinder holes to be ordered separately

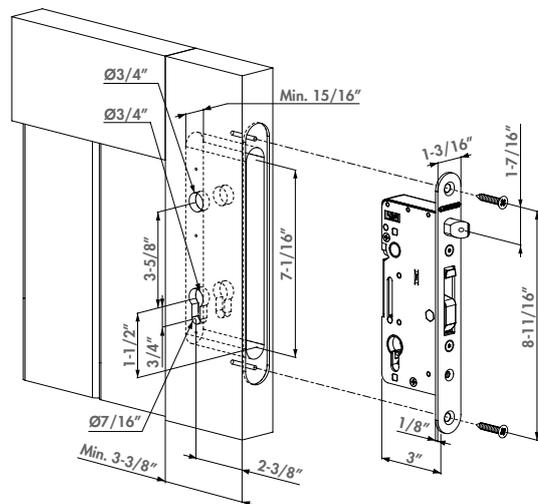

ORDER CODE

H-WOOD For profiles with a min. depth of 4" **24h** SHIPPING



H-WOOD-SET

Complete, stainless steel insert lock set for wooden gates

Complete set to equip your wooden gates with an adjustable, stainless steel insert lock and keep. A safe anchoring of the gate is guaranteed.

ORDER CODES

H-WOOD-SET-60-I H-WOOD + 3020-HYB-A2 (2x) + 3006I-H + SHKW-ALUM + 3012-60-STD-VSZ

H-WOOD-SET-80-I H-WOOD + 3020-HYB-A2 (2x) + 3006I-H + SHKW-ALUM + 3012-80-STD-VSZ



KEEPS



Keeps

No lock works without a keep. Locinox provides a wide range of keeps for sliding, swing, garden and child safety gates. An impact test at our facility ensures our keeps to handle every blow they receive and they meet our strict Locinox standard. Mounting is easy, fast and very strong thanks to our patented Quick-Fix system. The stop plates are adjustable and in many cases equipped with a protective rubber strip.

Sets

Locinox supports you in your logistic process


Select and compose your own gate hardware set and avoid stock ruptures or false deliveries of gate components to your customers. The set components are all together and, above all, packed in a robust and weatherproof box. If you wish, your logo can be put on the box for a maximal support of your brand. We will be glad to add your manuals or any other information according to your needs.

 100% modular  Time-saving  No research work



Garden gate - box set

- 1 SMKLQF
- 2 LAKZP1
- 3 GBM12

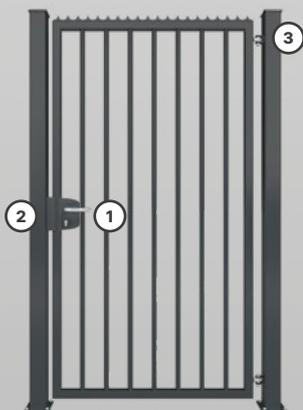

1 gate wing - foil set

- 1 LAKQU2
- 2 SAKLQF
- 3 G90Z



2 gate wings - foil set

- 1 LAKQU2
- 2 SH-KLQF
- 3 GBMU4D
- 4 3006PC






24h
SHIPPING

SE (Patented)

Electric strike for surface mounted locks

Electric strike for swing gates. Equipped with a double blocking system which will resist to up to 1000 lbs of pulling force. The deadbolt receiver has been reinforced with stainless steel, making it more robust and extremely strong. The ideal solution for your access control. SE is available in two versions: E (Emissa - Fail Close) and R (Ruptura - Fail Open).

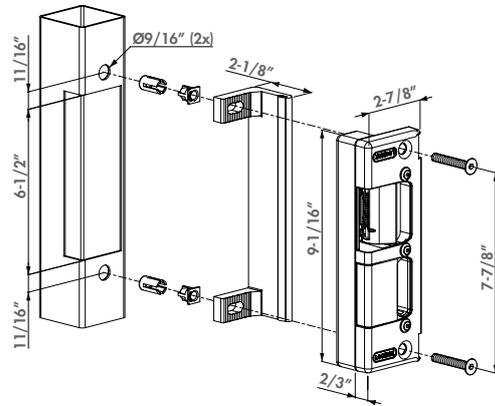

SPECIFICATIONS

- Type SE.E: Emissa - Fail Close
- Type SE.R: Ruptura - Fail Open
- Deadbolt receiver reinforced and in stainless steel
- For profiles 2" and larger
- Voltage: 12V AC/DC
- Current Emissa: 1A
- Current Ruptura: 1.5A
- Water resistant & weatherproof
- Pressure resistance on self-latching bolt: 1000 lbs

COMPATIBLE LOCKS



LAKQU2
P. 71

LUKYJ5
P. 73

LDKZD1
P. 74

LAKQH2
P. 83

ORDER CODES

- SE-E Electric strike, Emissa, Fail Close **24h** SHIPPING
- SE-R Electric strike, Ruptura, Fail Open **24h** SHIPPING




24h
SHIPPING

SEH (Patented)

Electric strike for mortise locks

Electric strike for swing gates using our Hybrid Mortise locks. The strike is equipped with a double blocking system which supports 1000 lbs pulling force. This keep is extremely strong and the ideal solution for your access control installations. The electric strike is available in a Fail Secure or Fail Safe model. Latch gap: 1". SEH is available in two versions: E (Emissa - Fail Close) and R (Ruptura - Fail Open).

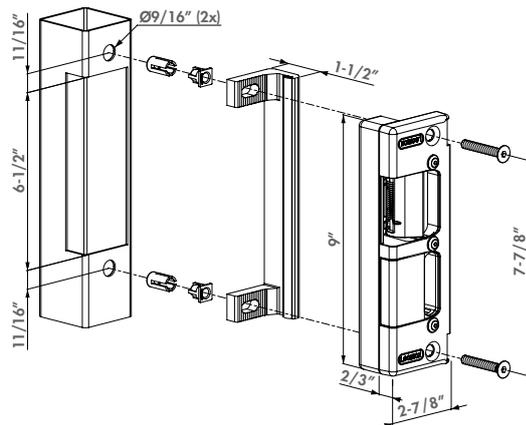

COMPATIBLE LOCKS



H-METAL
P. 103

H-METAL-WB
P. 104

H-WOOD
P. 107

ORDER CODES

- SEH-E Electric strike, Emissa, Fail Close for H-Metal and H-Wood **24h** SHIPPING
- SEH-R Electric strike, Ruptura, Fail Open for H-Metal and H-Wood **24h** SHIPPING



MODULEC-SA (Patented)

Surface mounted electric strike

Electric Strike for surface mounted locks. Fast and easy installation thanks to the Quick-Fix. Easily interchangeable with the SA keep. Can be connected to both 12V - 24V and AC/DC. Modulec-SA is available in two versions: E (Emissa - Fail Close) and R (Ruptura - Fail Open).


24h
SHIPPING

STOP PLATE COLOR OPTIONS



SPECIFICATIONS

- Tested up to 500 000 movements
- Fast and easy fixation with Quick-Fix bolts
- 660 lbs. holding force on the latch bolt
- Same drilling pattern as SA, SH and SM keeps
- Easy left or right hand changing
- Corrosion resistant: black anodized aluminum housing
- Adjustable for gate profiles: 1-9/16" - 2-3/8" depth
- Voltage: 12V-24V AC/DC
- Consumption: 12V - 1,25A / 24V - 0,62A
- Power: 15W

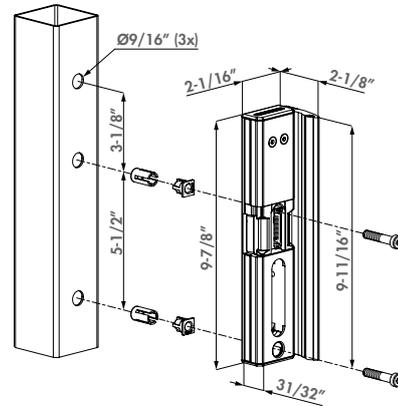

COMPATIBLE LOCKS



ORDER CODE

MODULEC-SA-E Fail Close for surface mounted gate locks, 12-24V AC/DC **24h** SHIPPING LAKQU2
 MODULEC-SA-R Fail Open for surface mounted gate locks, 12-24V AC/DC **24h** SHIPPING P. 71

LUKYJ5
P. 73

LDKZD1
P. 74

LAKQH2
P. 83

KEEPS FOR
SWING GATES



MODULEC-SH (Patented)

Surface mounted electric strike with security mushroom

Replace your SHKL keep with an electrical surface mounted keep with Fail Close / Fail Open functionality. Easy to install thanks to the patented Quick-Fix. For 12V-24V and AC/DC. Modulec-SH is available in two versions: E (Emissa - Fail Close) and R (Ruptura - Fail Open).


24h
SHIPPING

STOP PLATE COLOR OPTIONS



SPECIFICATIONS

- Tested up to 500 000 movements
- 660 lbs. holding force on the latch bolt
- Fast and easy installation with Quick-Fix
- Same drilling pattern as SA, SH and SM keeps
- Easy left or right hand changing
- Corrosion resistant: black anodized aluminum housing
- Adjustable for gate profiles: 1-9/16" - 2-3/8" depth
- Voltage: 12V-24V AC/DC
- Consumption: 12V - 1,25A / 24V - 0,62A
- Power: 15W

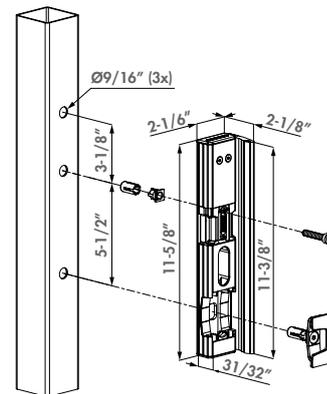

COMPATIBLE LOCKS



ORDER CODES

MODULEC-SH-E Fail Close for surface mounted gate locks, 12-24V AC/DC **24h** SHIPPING LAKQU2
 MODULEC-SH-R Fail Open for surface mounted gate locks, 12-24V AC/DC **24h** SHIPPING P. 71

LUKYJ5
P. 73

LDKZD1
P. 74

LAKQH2
P. 83



24h
SHIPPING

SAKLQF (Patented)

Adjustable keep out of stainless steel


Stainless steel keep with polyamide finish. Used as a standard for all your gates (garden, ornamental, industrial,...) The unique Quick-Fix ensures a fast and strong installation. The adjustable, aluminum stop plate with rubber accepts different gate profiles (1-1/2" to 2-1/2"). Redesigned to make the latch bolt fall into the keep easier.

STOP PLATE COLOR OPTIONS



SPECIFICATIONS

- Stainless steel keep with polyamide finishing
- Stop plate in extruded aluminum with rubber strip
- Easy left or right hand changing
- Innovative Quick-Fix mounting
- Adjustable for profiles: 1-1/2" to 2-1/2"
- For rectangular and round profiles

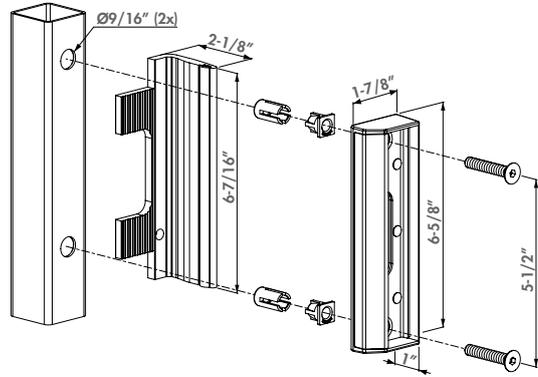

COMPATIBLE LOCKS



ORDER CODES

SAKLQF Industrial keep for square profiles
SARLQF Industrial keep for round profiles **24h** SHIPPING

KEEPS FOR SWING GATES



24h
SHIPPING

SH-KLQF (Patented)

Adjustable security keep out of stainless steel


The aluminum security keep is used as a standard for industrial and chain link gates as well as any gate where higher security is desired. The patented stainless steel anchoring system prevents prying the gates open and eliminates the need to install a transom over the gate. The unique Quick-Fix bolt ensures a fast and strong installation. The adjustable stop plate with rubber bumper adjusts to gate profiles up to 2-1/2" and fits on all latch posts 1-1/2" or larger. Latch gap: 1-1/4"

STOP PLATE COLOR OPTIONS



SPECIFICATIONS

- Reinforced stainless steel security keep for round and square profiles
- Stainless steel anchoring system included
- Easy left or right hand changing
- Innovative Quick-Fix mounting
- Prevents opening the gate with a crowbar
- For rectangular and round profiles
- Aluminum adjustable slam plate with shock rubber
- Adjustable for gate profiles: 1-1/2" (K) to 2-1/2" (L)

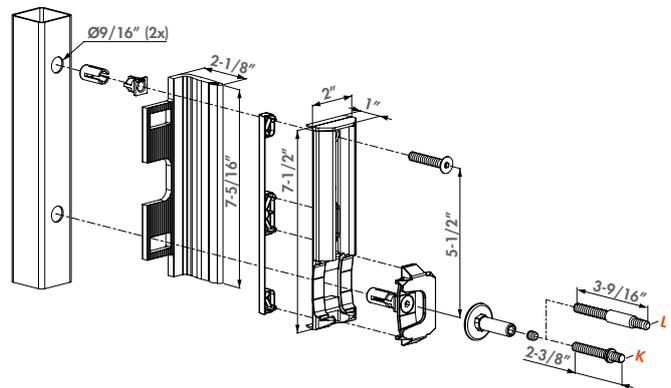

COMPATIBLE LOCKS



ORDER CODES

SHKLQF Industrial security keep for square profiles **24h** SHIPPING
SHRLQF Industrial security keep for round profiles



SMKLQF

Polyamide gate keep for rectangular profiles


Polyamide keep for walk and garden gates. This economical gate stop and receiver is typically used in conjunction with the polyamide bodied garden gate lock LAKZ P1. The unique Quick-Fix bolt ensures a fast and strong installation. This keep is designed for gate profiles 1-1/2" and fits on all latch posts 1-1/2" or larger.

COLOR OPTIONS

9005 7040 7016 6009 6005

SPECIFICATIONS

- Keep in polyamide for square profiles
- Easy left or right hand changing
- Innovative Quick-Fix mounting
- For gate profiles 1-1/2" or more

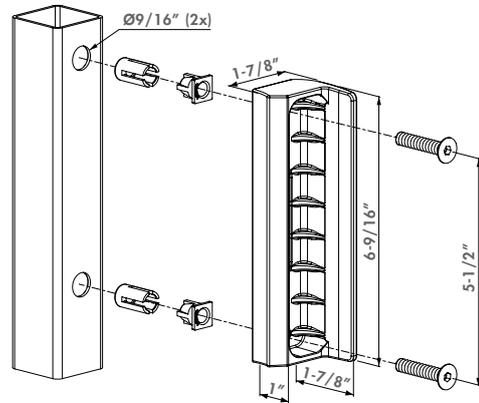

COMPATIBLE LOCKS



LAKZP1
P. 84

LAKZP1WSI
P. 85

ORDER CODE

SMKLQF Polyamide garden gate keep for square profiles



SKRZ

Polyamide gate keep for round profiles


Polyamide keep for walk and garden gates. This economical gate stop and receiver is typically used in conjunction with the polyamide bodied garden gate lock LAKZ P1. The U-Bolt mount ensures a fast and strong installation on round tube. This keep is designed for gate profiles 1-1/2" and latch post profiles 2-3/8" round. Latch gap: 7/8"

COLOR OPTIONS

9005 7040 6009 6005

SPECIFICATIONS

- Keep in polyamide for round profiles
- Easy left or right hand changing
- Only for round posts Ø2-3/8"
- For gate profiles of 1-1/2" width

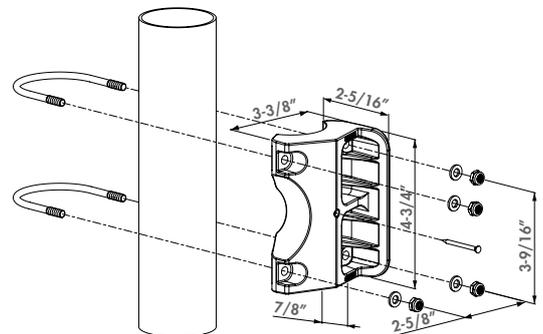

COMPATIBLE LOCKS



LAKZP1
P. 84

LAKZP1WSI
P. 85

ORDER CODE

SKRZ Polyamide garden gate keep for round profiles

KEEPS FOR SWING GATES




24h
SHIPPING

SF

Stainless steel keeper for narrow gaps

The durable, stainless steel surface mounted keep is designed for our complete range of surface mounted swing gate locks. The limited 5/16" visible thickness ensures a discreet look while strongly securing to the gate frame with our unique Quick-Fix bolts. With minimal gate preparation needed and a quick assembly, the keep offers a highly-efficient and cost-effective installation. The SF keep and gate lock combined provide a strong gate anchoring for reliable access control.

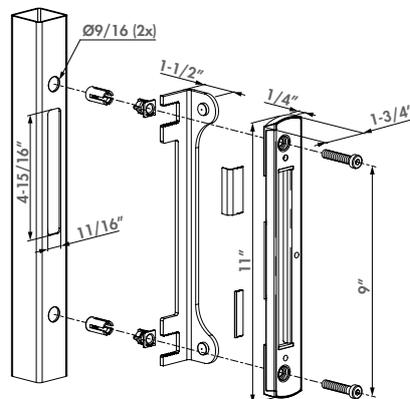

SPECIFICATIONS

- Stainless steel keeper for square profiles as of 1-9/16"
- Compatible with our complete range of surface mounted swing gate locks
- Extruded stop plate in aluminum with rubber strip for longterm use
- Including innovative Quick-Fix fixations and self-drilling screws
- Easy left or right hand changing
- Elegant design: visible thickness of 5/16"
- Adjustable stop plate for 1-1/2" to 2-1/2" gate frames
- Adjustable guide to avoid damage of day bolt to post

COMPATIBLE LOCKS



LAKQU2
P. 71

LUKYJ5
P. 73

LMKQV2
P. 78

LAKQH2
P. 83

ORDER CODE

SF Stainless steel surface mounted keeper for surface mounted locks, adjustable for 1-1/2" to 2-1/2" gate frames **24h** SHIPPING



3006PC

Pull Counter Box


Aesthetic solution in aluminum for the construction of symmetric double swing gates in combination with the Locinox keep. If used with the Locinox 4D-hinges, you can simplify your production of double gates to one single identical gate wing which can be used either on the left or right side. The pull counter box fills up the symmetric lock opening in the other gate wing.

COLOR OPTIONS

SILV 9005 7016 6009 6005

SPECIFICATIONS

- Metal folded counter box to pull the gate open, designed in the same shape as the industrial lock for perfect symmetry
- To use in combination with the SA or the SH keep with the special through and through fixing

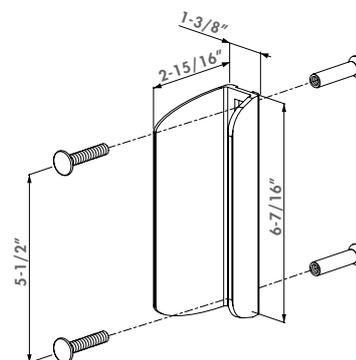

COMPATIBLE LOCKS



LAKZP1
P. 84

LAKZP1WSI
P. 85

LAKQU2
P. 71

ORDER CODE

3006PC Folded counter box in aluminum with through and through fixing



SPKZ-QF

Ornamental keep

Flat stainless steel strike plate with polyamide insert that fits into the post for a clean, finished look. This keep allows you to align your ornamental gates with a minimum latch gap in between. This strike plate does not have an integrated gate stop, so the gate can swing through. Quick-Fix bolts are provided. Latch gap: 1/4"


24h
SHIPPING

COLOR OPTIONS



SPECIFICATIONS

- Insert keep for square profiles of 1-9/16"
- Innovative Quick-Fix mounting

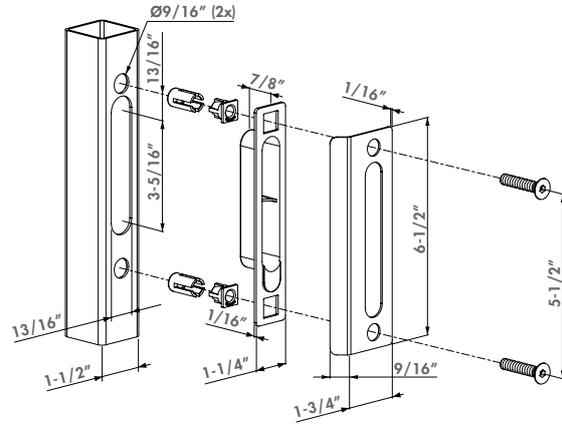

COMPATIBLE LOCKS



LAKQH2
P. 83

LAKYF2
P. 82

LAKQU2
P. 71

LMKQV2
P. 78

ORDER CODE

SPKZ-QF-40 Insert keep for square profiles of 1-1/2" 24h SHIPPING




SPKZ-TK

Strike Plate with counter lock box

Flat stainless steel strike plate with polyamide insert that fits into the post for a clean, finished look. This keep allows you to align your ornamental gates with a minimum latch gap in between and offers you a nice aesthetical look for double gates with the ornamental counter box opposite the lock. This strike plate does not have an integrated gate stop, so the gate can swing through. Latch gap: 1/4"

SPECIFICATIONS

- Counter lock box with the same shape as the ornamental lock
- For square profiles 1-1/2" min
- Mounting: through the profile into the counter lock box

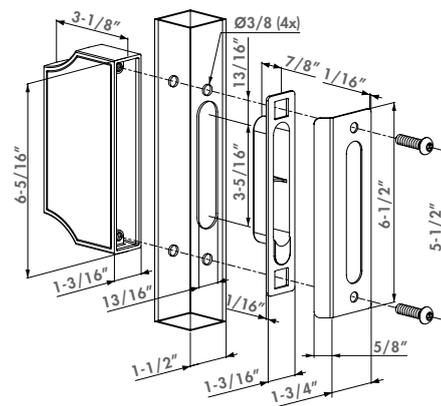

COMPATIBLE LOCKS



LAKQH2
P. 83

LAKYF2
P. 82

ORDER CODE

SPKZ-TK-50-ALUM Insert keep and ornamental counterbox for square profiles of 2"

SSKZ QF (Patented)

Sliding gate keep with Quick-Fix


Stainless steel sliding keep for hollow posts. The keep is 5/8" auto-adjustable left/right for an easy and secure anchoring of the gate lock. A rubber stop prevents the gate from being damaged in closed position.



24h
SHIPPING

SPECIFICATIONS

- Keep in stainless steel for square profiles
- Minimum profile size: 3" wide
- Fast and easy fixation with Quick-Fix bolts
- The keep is 3/8" left/right auto-adjustable for easy and secure anchoring of the Twistfinger
- The rubber stop prevents damaging the gate frame

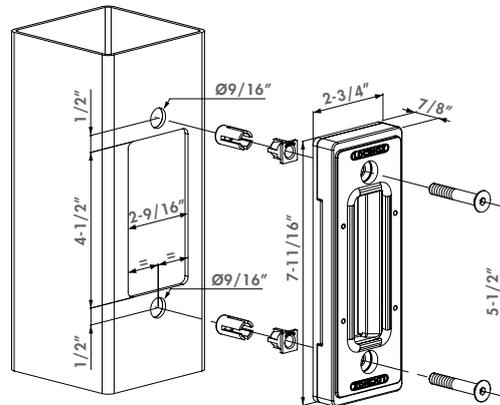

COMPATIBLE LOCKS



LLKZV2
P. 89

LSKZU2
P. 90

LGKZD1
P. 91

ORDER CODE

SSKZ QF Sliding gate keep for square profiles with a min. width of 3" **24h** SHIPPING

O-SET

Aluminum adapter case for SSKZ QF for flat profiles


Adapter for the SSKZ QF sliding gate keep. Can be used when mounting the keep on flat profiles or if you want the keep surface mounted.



24h
SHIPPING

SPECIFICATIONS

- Aluminum case to use together with sliding gate keep SSKZ QF when installing on a flat profile
- Protects the Twistfinger when the keep is mounted on a flat profile with a minimum thickness of 1/4" and a maximum thickness of 3/4"
- Delivered with through and through fasteners

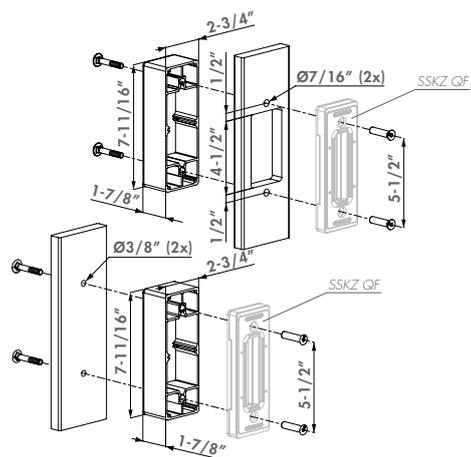

RECOMMENDED KEEP



SSKZ QF
P. 117

ORDER CODE

O-SET Aluminumcover box for catch bolt protection **24h** SHIPPING



24h
SHIPPING


STKQF (Patented)

Keep for square profiles for TWIST40

This polyamide keep conforms to the European swimming pool standard NF P90-306. It is designed to work with the TWIST40 swimming pool lock. Fast and strong installation on square posts using our patented Quick-Fix bolts. For gate profiles 1-1/2" only. Latch gap: 1-1/4"

SPECIFICATIONS

- Keep in polyamide for square profiles 1-1/2" or larger
- For 1-1/2" gate profiles only
- Only compatible with the swimming pool lock TWIST40
- Innovative Quick-Fix mounting
- Conforms to swimming pool standard NF P90-306
- We strongly advise you to read the swimming pool standard NF P90-306 before manufacturing any swimming pool gate

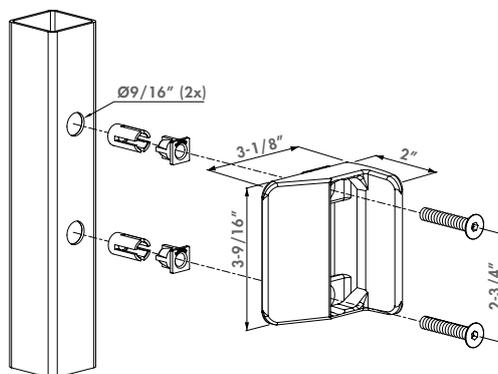

COMPATIBLE LOCK



TWIST40
P. 88

ORDER CODE

STKQF Keep for TWIST40 pool lock, Fits min 1-1/2" square profiles **24h** SHIPPING




STR60 QF (Patented)

Keep for round profiles for TWIST40

This polyamide keep conforms to the European swimming pool standard NF P90-306. It is designed to work with the Twist40 swimming pool lock. Fast and strong installation on 2-3/8" diameter round tubes using our patented Quick-Fix mounting hardware. For gate profiles 1-1/2" only. Latch gap: 1-1/4"

SPECIFICATIONS

- Keep in polyamide for round profiles Ø2-3/8"
- For 1-1/2" gate profiles only
- Only compatible with the swimming pool lock TWIST40
- Innovative Quick-Fix mounting
- Conforms to swimming pool standard NF P90-306
- We strongly advise you to read the swimming pool standard NF P90-306 before manufacturing any swimming pool gate

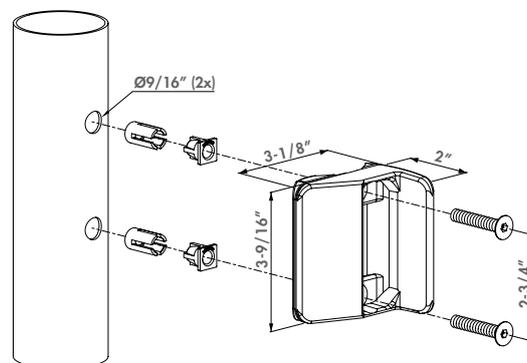

COMPATIBLE LOCK



TWIST40
P. 88

ORDER CODE

STR60 QF Keep for TWIST40 pool lock, Fits 2-1/2" round latch posts only



KEEPS FOR SWIMMING
POOL LOCKS



24h
SHIPPING


SFKB

Surface mounted stainless steel keep strike for Fortylock, Fiftylock and Sixtylock

Stainless steel keep with polyamide finishing for all your metal, aluminum and PVC gates. The patented stainless steel anchoring system prevents pulling the gates out of the keep. The unique Quick-Fix ensures a fast and strong mounting.

SPECIFICATIONS

- Keep for square profiles
- Aluminum slam plate with shock rubber
- Innovative installation with Quick-Fix
- To combine with Fortylock, Fiftylock, Sixtylock and Eightylock
- Stainless steel anchoring system included
- Easy left or right hand changing
- Prevents opening the gate with a crowbar
- Adjustable for profiles: 1-1/2" to 2-1/2"

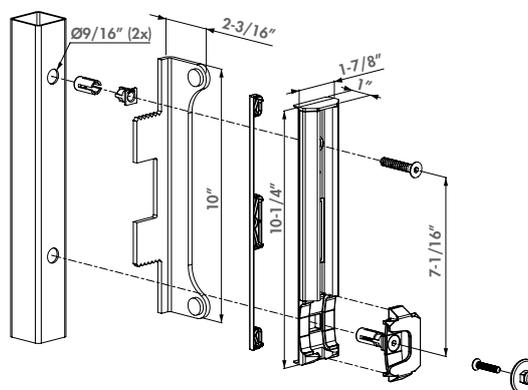

COMPATIBLE LOCKS



FORTYLOCK
P. 94



FIFTYLOCK
P. 95



SIXTYLOCK
P. 96

ORDER CODE

SFKB-QF For profiles 1-1/2" to 2-1/2" **24h** SHIPPING

KEEPS FOR
MORTISE LOCKS




SFKP

Polyamide keep for Fortylock, Fiftylock and Sixtylock

Polyamide keep for walk- and garden gates. To combine with Fortylock, Fiftylock, Sixtylock and Eightylock. The Quick-Fix ensures a fast and strong mounting on square posts. For gate profiles 1-1/2".

SPECIFICATIONS

- Keep for square profiles of 1-9/16"
- Standard measure between fixings: 5-1/2"
- Innovative installation with Quick-Fix
- Easy left or right hand changing

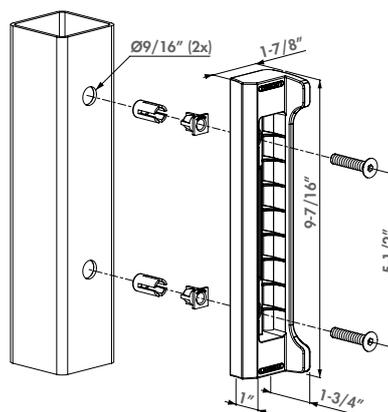

COMPATIBLE LOCKS



FORTYLOCK
P. 94



FIFTYLOCK
P. 95



SIXTYLOCK
P. 96

ORDER CODE

SFKP-QF40 For square gate profiles 1-1/2"




24h
SHIPPING

SFKI

Insert stainless steel strike for Fortylock, Fiftylock and Sixtylock

Insert keep for small gates in metal, aluminum and PVC. The keep can be combined with the FortyLock, Fiftylock and Sixtylock. Fast and easy mounting with Quick-Fix. Hook of FortyLock in combination with the keep provides a secure anchoring of gate and post. Available for square posts of 1-3/16" or 1-1/2".

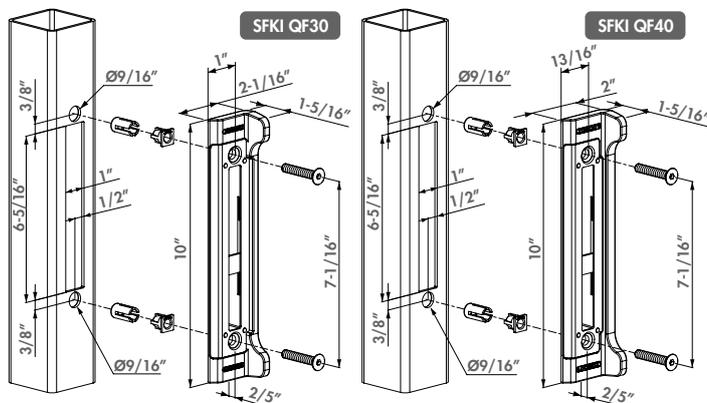

SPECIFICATIONS

- Keep for square profiles
- Innovative installation with Quick-Fix
- Easy left or right hand changing
- Insert depth: 9/16"
- Available for gate profiles 1-3/16" or 1-9/16"

ORDER CODES

SFKI-QF30 For square gate profiles 1-1/8"

SFKI-QF40 For square gate profiles 1-1/2" **24h** SHIPPING

COMPATIBLE LOCKS



FORTYLOCK
P. 94



FIFTYLOCK
P. 95



SIXTYLOCK
P. 96




24h
SHIPPING

SFKO (Patented)

Stainless steel surface mounted keep for insert locks

Aesthetical surface mounted keep. Specially designed for Fortylock, Fiftylock and Sixtylock insert locks. The keep is perfectly modular with the electrical strike Modulec-SF, no changes needed. A highly efficient mounting with minimal gate preparations is guaranteed, while the unique Quick-Fix ensures a fast and strong fixation on the gate. The anchoring system ensures a strong gate closure.

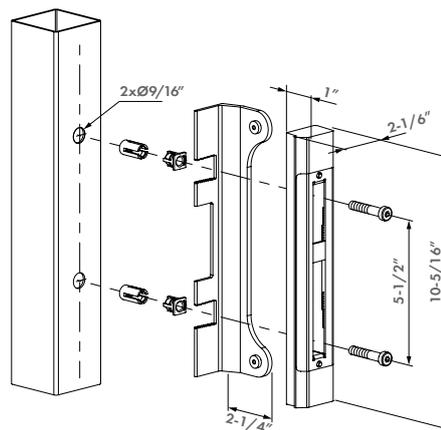

COLOR OPTIONS



SPECIFICATIONS

- Modular with electric strike MODULEC-SF
- Keep for square profiles
- Innovative installation with Quick-Fix
- Extruded stop plate in aluminum with rubber strip for longterm use
- SFKO recommended for Fortylock
- SFKO-5060 recommended for Fiftylock, Sixtylock & Eightylock
- Vandal proof design: hook-in anchoring system prevents opening with a crowbar
- Easy left or right hand changing
- Adjustable for gate profiles: 1-9/16" - 2-3/8"

ORDER CODES

SFKO-QF Stainless steel surface mounted keep for Fortylock

COMPATIBLE LOCKS



FORTYLOCK
P. 94



FIFTYLOCK
P. 95



SIXTYLOCK
P. 96



24h
SHIPPING

COLOR OPTIONS




SPECIFICATIONS

- Extruded stop plate in aluminum with rubber strip for longterm use
- Easy left or right hand changing
- Elegant design: visible thickness of 5/16"
- Adjustable stop plate for 1-1/2" to 2-1/2" gate frames
- Adjustable guide to avoid damage of day bolt to post

SFKM

Stainless steel surface mounted keep for Fortylock, Fiftylock and Sixtylock

Aesthetical surface mounted keep for small metal, aluminum and PVC gates. Specially designed for Fortylock, Fiftylock and Sixtylock insert locks. The limited 5/16" depth ensures a discreet look. A highly efficient assembly with minimal gate preparations is guaranteed, while the unique Quick-Fix ensures a fast and strong fixation on the gate. This unique keep in combination with the insert lock ensures a strong gate anchoring.

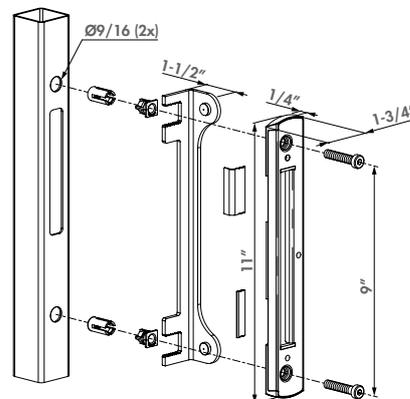

COMPATIBLE LOCKS



FORTYLOCK
P. 94



FIFTYLOCK
P. 95



SIXTYLOCK
P. 96

ORDER CODE

SFKM-QF

For profiles 1-1/2" to 2-1/2" **24h** SHIPPING

KEEPS FOR
MORTISE LOCKS



24h
SHIPPING

COLOR OPTIONS




SPECIFICATIONS

- Adjustable for gate profiles: 1-1/2" - 2"
- Integrated Click-It installation system
- Easy left or right hand changing
- Extruded stop plate in aluminum with rubber strip for longterm use
- To combine with Fortylock, Fiftylock, Sixtylock and Eightylock
- Includes connection parts for optional SHIELDLINE

SFKU (Patented)

Insert keep for installation in lock pattern

Stainless steel insert keep to be combined with insert locks. Suits the universal wing preparation of 1-9/16" wide frames. The integrated "Click-It" system requires only a slight shift for a quick and secure fixation. The slim design limits the distance between lock and keep and increases the level of privacy of your gate.

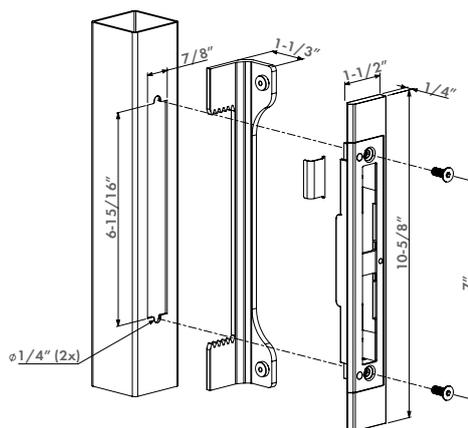

COMPATIBLE LOCKS



FORTYLOCK
P. 94



SIXTYLOCK
P. 96




SHIELDLINE
P. 195

ORDER CODE

SFKU-40

Insert keep for installation in lock pattern **24h** SHIPPING

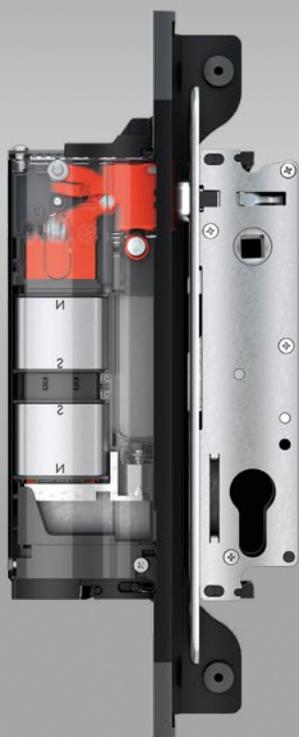

UNILEC

With an innovative mechanism that pushes out the day bolt

KEEPS FOR
MORTISE LOCKS



NEW **UNILEC** (Patent pending)


Electric insert keep for insert locks

Coming soon. Complete your gate installation aesthetically and efficiently with UNILEC. This innovative electric keep pushes the latch bolt outward and allows flexible positioning within the post. UNILEC fits perfectly into the UNIWING profile and is easily mounted with the CLICK-IT system. The sleek finish minimizes the gap between gate and post. The keep operates on 24V DC and is available with or without a stop plate. Extra security is ensured by the Fail-Close functionality.

24h
SHIPPING

SPECIFICATIONS

- Pushes day bolt outward
- Integrated Click-It installation system
- UNIWING-compatible
- Easy left or right hand changing
- Adjustable stop plate for 1-1/2" to 1-15/16" gate frames
- Compatible with Fortylock, Fiftylock, Sixtylock & Eightylock
- IP56
- Voltage: 24 V DC
- Power consumption in operation: 3 W / Peak: 55W
- For profiles 2-1/2" and larger

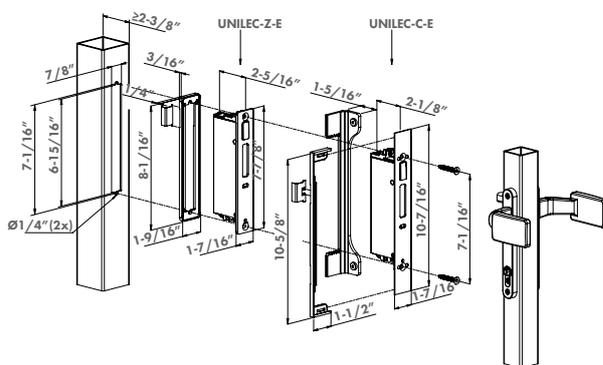

COMPATIBLE PRODUCTS



POWERSTONE
P. 60



FORTYLOCK
P. 94



FIFTYLOCK
P. 95

ORDER CODE

UNILEC-C-E Fail Close, with stop plate

UNILEC-Z-E Fail Close, without stop plate



24h
SHIPPING


MODULEC-SF (Patented)

Surface mounted electric strike for Forty-, Fifty- and Sixtylock

Easy-to-install surface mounted electric strike with a narrowed stop plate for insert locks. Thanks to the patented Quick-Fix, a quick installation is guaranteed. The black anodized housing ensures a corrosion and scratch-free use for many years. Can be connected to both 12V - 24V and AC/DC. Modulec-SF is available in two versions: E (Emissa - Fail Close) and R (Ruptura - Fail Open).

SPECIFICATIONS

- Tested up to 500 000 movements
- Fast and easy fixation with Quick-Fix bolts
- 660 lbs. holding force on the latch bolt
- Easy left or right hand changing
- Corrosion resistant: black anodized aluminum housing
- Adjustable for profiles: 1-1/2" to 2-1/2"
- Voltage: 12V-24V AC/DC
- Consumption: 12V - 1,25A / 24V - 0,62A
- Power: 15W
- Available in two colors: RAL 9005 & ALUM

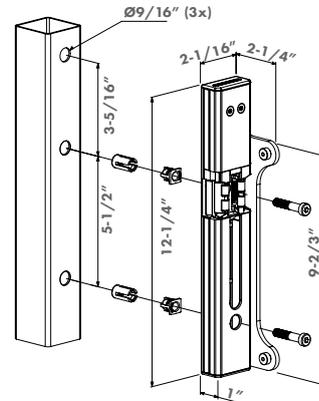

COMPATIBLE LOCKS



FORTYLOCK
P. 94

FIFTYLOCK
P. 95

SIXTYLOCK
P. 96

ORDER CODES

MODULEC-SF-E	Fail Close for insert locks, 12-24V AC/DC	24h SHIPPING
MODULEC-SF-R	Fail Open for insert locks, 12-24V AC/DC	24h SHIPPING



24h
SHIPPING


INTRALEC (Patented)

Built-in electric keep for Fortylock, Fiftylock and Sixtylock insert locks

Elegant and discreet electric keep which is built-in the post. Easy installation thanks to the patented Click-It system. Can be installed without a strike plate and a mechanical override is possible. Intralec is available in Fail Open (Ruptura) and Fail Close (Emissa) version.

SPECIFICATIONS

- Fast and easy fixing with Click-it
- 660 lbs. holding force on the latch bolt
- Deep closure of 3-15/16" of the latch bolt
- Voltage: 12V-24V AC/DC
- Consumption: 10W / 12V - 0.8A / 24V - 0.4A

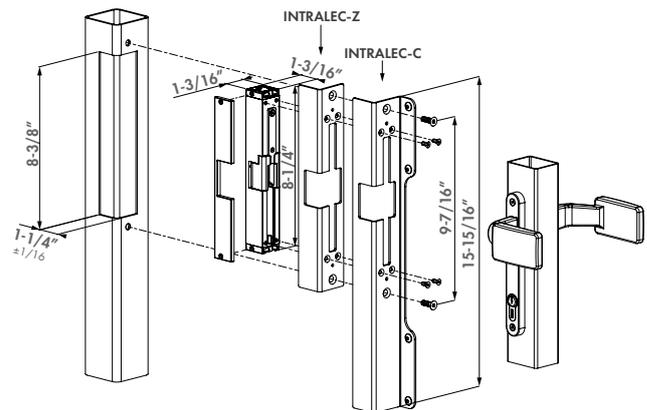

COMPATIBLE LOCKS



FORTYLOCK
P. 94

FIFTYLOCK
P. 95

SIXTYLOCK
P. 96

ORDER CODES

INTRALEC-C-40-E	For 1-9/16" gate profiles - Fail Close, with stop plate	24h SHIPPING
INTRALEC-C-40-R	For 1-9/16" gate profiles - Fail Open, with stop plate	24h SHIPPING
INTRALEC-C-50-E	For 2" gate profiles - Fail Close, with stop plate	24h SHIPPING
INTRALEC-C-50-R	For 2" gate profiles - Fail Open,	24h SHIPPING
INTRALEC-Z-40-E	For 1-9/16" gate profiles - Fail Close, without stop plate	24h SHIPPING
INTRALEC-Z-40-R	For 1-9/16" gate profiles - Fail Open, without stop plate	24h SHIPPING
INTRALEC-Z-50-E	For 2" gate profiles - Fail Close, without stop plate	24h SHIPPING
INTRALEC-Z-50-R	For 2" gate profiles - Fail Open, without stop plate	24h SHIPPING



24h
SHIPPING


SHKC

Stainless steel keep for H-COMPACT

Stainless steel keep for the H-COMPACT insert lock. The 1-9/32" throw of the hook and the anti-lift protection provide a secure anchoring. Latch gap: 3/8"

SPECIFICATIONS

- Plastic box prevents intrusion of dirt or water in the profile
- 15/64" thick front plate
- Can be used for swing and slide gates
- Innovative installation with Quick-Fix
- The strike presents a safe solution and prevents lifting the gate out of position.

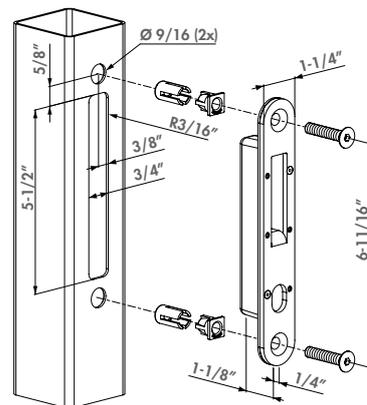

COMPATIBLE LOCK



H-COMPACT

ORDER CODE

SHKC For square posts with a min. width of 1-1/2" in combination with H-COMPACT lock **24h** P. 104
SHIPPING

SHKM (Patented)

Hybrid keep for insert locks

Aluminum keep for Hybrid mortise locks. This unique keep combined with the Hybrid lock ensures a strong anchoring. With Quick-Fix for metal and aluminum posts.




24h
SHIPPING

STOP PLATE COLOR OPTIONS



SPECIFICATIONS

- Adjustable for profiles: 1-1/2" to 2-1/2"
- Innovative Quick-Fix mounting
- Anchoring plate for hook
- Easy left or right hand changing

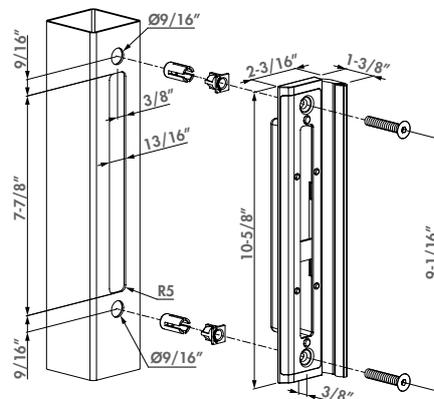

COMPATIBLE LOCK AND ACCESSORIES



H-METAL
P. 103

H-METAL-WB
P. 104

ORDER CODE

SHKM For square posts in combination with H-METAL lock **24h** SHIPPING

SHKW

Hybrid keep for wood


Aluminum keep for our Hybrid Mortise locks. This unique keep is left and right hand reversible and comes with an adjustable stop plate that fits 1-1/2" to 2-1/2" gate profiles. When used in combination with the Hybrid lock this keep ensures strong gate locking while preventing the gate from being pried open as the dead bolt's "hook" locks into the keep's anchoring plate. This model comes with wood screws for installation on wooden posts. Latch gap: 7/8"



24h
SHIPPING

SPECIFICATIONS

- Stainless steel keep for Hybrid locks
- With mounting screws for wood
- Supplied with stop plate if integrated stop is not provided
- For 1-1/2" to 2-1/2" gate profiles
- Anchoring plate for hook

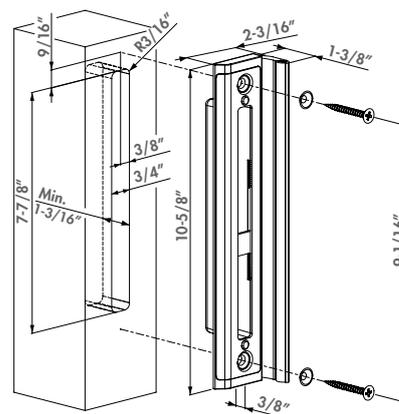

COMPATIBLE LOCKS



H-WOOD
P. 107

H-METAL
P. 103

ORDER CODE

SHKW For wooden posts in combination with H-WOOD lock **24h** SHIPPING

KEEPS FOR MORTISE LOCKS



NEW **SFKU-V** (Patented)

Insert keep for insert locks with code lock

Complete your access control on pedestrian gates with this stainless steel keep, specifically designed for use with a code lock for insert locks. The SFKU-V is suitable for frames 40mm and 50mm deep, fits into the existing and universal profile preparation of the insert locks, and is easily mounted with the Click-It installation system. Enjoy increased privacy thanks to the slim design and minimal distance between the insert lock and the keep.


24h
SHIPPING

COLOR OPTIONS



SPECIFICATIONS

- Adjustable for gate profiles: 1-1/2" - 2"
- Integrated Click-It installation system
- Easy left or right hand changing
- Extruded stop plate in aluminum with rubber strip for longterm use
- To combine with Fortylock, Fiftylock, Sixtylock and Eightylock
- UNIWING-compatible

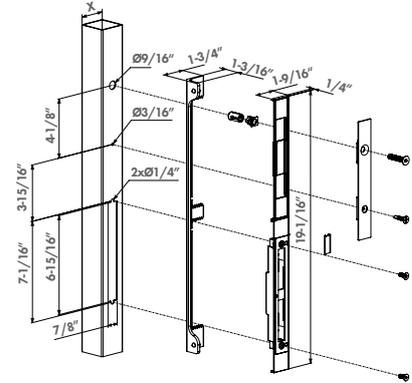

COMPATIBLE PRODUCTS



VERA
P. 101



VITA
P. 102



SHIELDLINE
P. 195

ORDER CODE

SFKU-V Insert keep for insert locks with code lock **24h** SHIPPING

KEEPS FOR
MORTISE LOCKS



NEW **SFKO-V** (Patented)

Surface mounted keep for insert locks with code lock

The SFKO-V is a surface mounted keep for Locinox insert locks, combined with a code lock. After minimal profile preparation, the SFKO-V is quickly and securely mounted thanks to the QUICK-FIX system.


24h
SHIPPING

COLOR OPTIONS



SPECIFICATIONS

- Compatible with VERA & VITA
- Adjustable for gate profiles: 1-1/2" - 2" - 2-1/2"
- Keep for square profiles
- Easy left or right hand changing
- Extruded stop plate in aluminum with rubber strip for longterm use
- SFKO-V recommended for Fortylock
- SFKO-V-5060 recommended for Fiftylock, Sixtylock & Eightylock

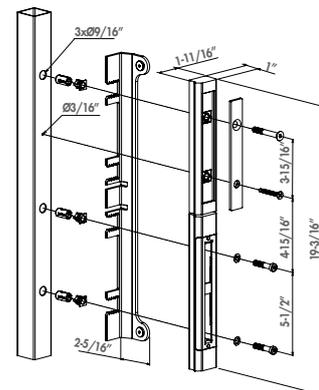

COMPATIBLE PRODUCTS



VERA
P. 101



VITA
P. 102



FORTYLOCK
P. 94

ORDER CODE

SFKO-V Surface mounted keep for insert locks with code lock **24h** SHIPPING



HINGES



Hinges

Hinges support the weight of the gate and ensure it to open & close smoothly. Because of this heavy task, our hinges are hot-dip galvanized or made of stainless steel. Thanks to our wide range we can offer a solution for every situation. Top of the line is the patented 4D hinge. This hinge is adjustable in 4 dimensions (height/depth/alignment/left or right turning).

Safety

Even though our products meet most important safety standards, a wrongful assembly could result in hazardous situations. Therefore we like to inform you about the parameters to mind during assembly.



CORRECT INFORMATION

Every product is supplied with a clear manual which guides you through the steps for a correct and safe installation. For more complex products, a 3D installation video is available on our website. A team of engineers and experienced product experts are ready to assist you.

B/U SAFE

B-SAFE and U-SAFE are safety cables installed between the gate and wing near the top hinge. They prevent uncontrolled movement of the gate wing in case of hinge failure and comply with the EN 12604 safety standard.*

MAXIMUM GATE WEIGHT

We always mention the maximum gate weight which is allowed for our hinges. This weight is still under the maximum load. Locinox applies safety factor 3.5 which means that they can bear up to 3.5 times the maximally allowed gate weight without endangering safety. The maximum gate weights and the safety factor are only applicable for gates that comply with the following formula.

PLEASE NOTE:

- Maximum gate width: 13 ft
- Additional limitations can be defined on configuration level
- Please contact Locinox in case of specific questions



SAFETY FACTOR
3.5

$$\frac{W}{A} \leq 2$$

A = Distance between the hinges
W = Gate width



*European norm EN 12604 prescribes that every manually operated gate should be prevented from falling and in case of failure of a hinge the gate should be held not further than 11" from the turning point of that hinge. This can be done by fitting the U-Safe or B-Safe gate safety cable or a 3rd hinge.

EXCENTRO


180° hinge set for ascending slopes

This hinge is the perfect solution for sloped driveways. The hinge opens in an upward movement inwards, allowing a perfect entry and exit on even the steepest slopes (from 2% up to 35%). Modular for gates with a Locinox GBMU4D-M16 preparation.



SPECIFICATIONS

- Hot-dip galvanized hinge with stainless steel components
- 180° opening and closing angle
- Adjustable for slopes from 2 up to 35% (depending on distance between hinges)
- For left and right handed gates
- Compatible with KLAUW gate claw and 1001U U-shaped ear plate



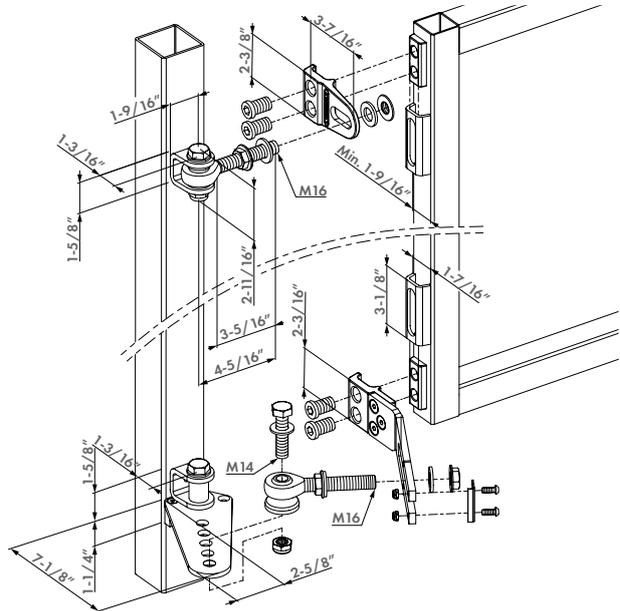


ORDER CODE

EXCENTRO-M16

Eyebolt M16

For slopes from 2 up to 35%

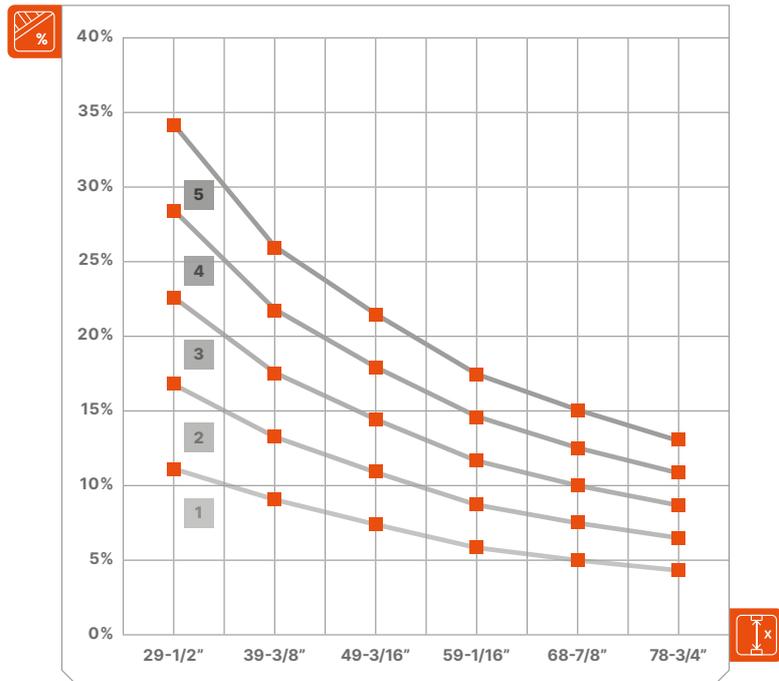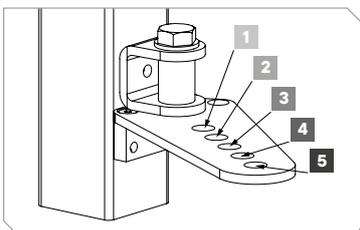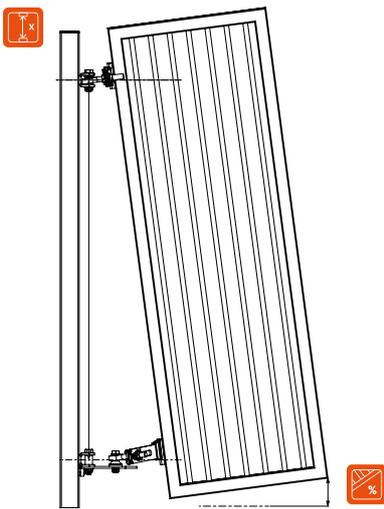

Driveway slope percentage



Distance between hinges



BOLTON-U

Bolt-on U-shaped earplate with Quick-Fix


Fix easily and firmly the U-shaped earplate to the fix post with 2 Quick-Fix. Compatible with GBMU, GBMU4D and BOLTONHD-4D.

COLOR OPTIONS

ALUM 9005 7016 6005

SPECIFICATIONS

- U-shaped earplate in aluminum
- Perfect combination with BOLTONHD-G-QF
- No welding required: drill holes and fix with Quick-Fix

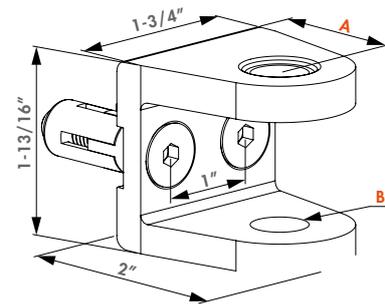

ORDER CODES

	A	B
BOLTON-U-12-QF	15/16"	Ø1/2"
BOLTON-U-16-QF	1-1/4"	Ø9/16"

HINGES FOR INDUSTRIAL GATES



BOLTON-P

Bolt-on GRIP in aluminum


The aluminum GRIP is attached quickly, easily and firmly to the back of the gate profile with 2 Quick-Fix bolts. Using the Bolton-P allows you to prepare one gate for both left and right gates. This GRIP is a perfect fit for lighter gates, such as garden gates for example. Compatible with BOLTON-U earplate.

COLOR OPTIONS

ALUM 9005 7016 6005

SPECIFICATIONS

- Perfect in combination with BOLTON-U-
- Max width of the gate: 59-1/16" (M12)
- Max weight of the gate: 110 lbs (M12)
- Max width of the gate: 78-3/4" (M16)
- Max weight of the gate: 165 lbs (M16)

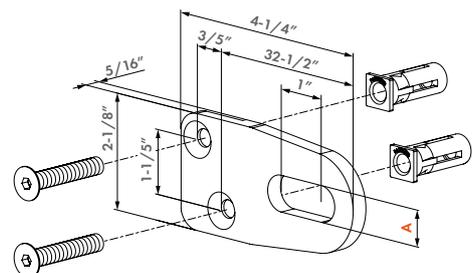

ORDER CODES

	A
BOLTON-P-12-QF	1/2"
BOLTON-P-16-QF	11/16"



BOLTONHD-G (Patented)

Bolt-on GRIP


The GRIP is attached quickly, easily and firmly to the fixed post with 2 Quick-Fix bolts. Compatible with GBMU, GBMU4D, BOLTON4D and BOLTONHD-4D.

COLOR OPTIONS

ALUM 9005 7016 6005

SPECIFICATIONS

- GRIP in aluminum
- No welding required: drill holes and fix with Quick-Fix

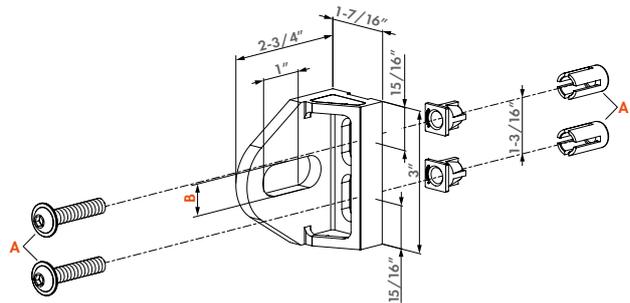

ORDER CODES

BOLTONHD-G-12-QF
BOLTONHD-G-16-QF

A	B
Quick-Fix	1/2"
Quick-Fix	11/16"



24h
SHIPPING

BOLTONHD-4D (Patented)

180° Bolt-on 4D adjustable hinge

This 180° hinge can be installed quickly without any welding. The BOLTON-HD-4D offers the same advantages as the Locinox GBMU hinge-line: vandal protection; a lot of adjustability (height, depth, and gap between gate and post); one part fits left or right handed gates. BOLTONHD-4D is available in M12 and M16, and always in 2 versions: one with Quick-Fix on both sides and one with Quick-Fix on the post, and on gate side a bolt through fixing for gate frames from 1.6" to 2.4".

COLOR OPTIONS

ALUM 9005 7016 6005
24h
SHIPPING

SPECIFICATIONS

- Easy to fix with Quick-Fix
- Vandal-proof eyebolt & crossbolt
- 180° opening
- Hot-dip galvanized eyebolt and crossbolt
- Max width of the gate: 6-1/2 ft

HINGE PARTS




BOLTON-U
P. 132



BOLTONHD-G
P. 133



1034HDGA
P. 137

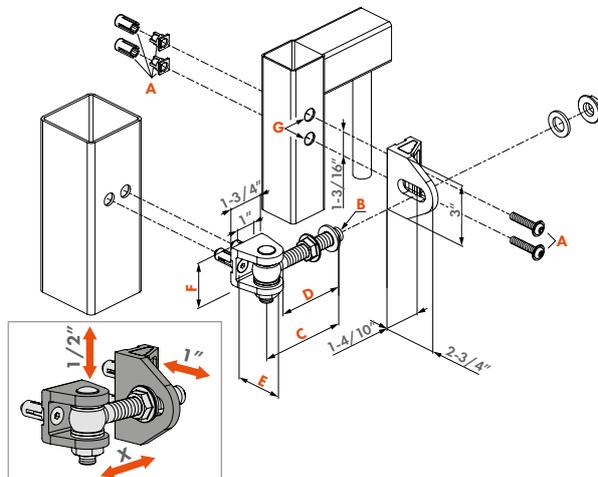

ORDER CODES

BOLTONHD-4D-12-QF
BOLTONHD-4D-16-QF



220 lbs
440 lbs

A	B	C	D	E	F	G
Quick-Fix	M12	3-9/16"	2-3/4"	1-5/8"	1-3/8"	Ø5/8"
Quick-Fix	M16	4-3/8"	3-3/8"	2"	1-7/8"	Ø5/8"



24h
SHIPPING



GBMU4D (Patented)

180° weld-on 4D adjustable hinge

4-way adjustable, hot-dip galvanized 180° hinge. Depth and spacing between gate and post are adjustable after installation. No more left or right swinging gates in stock. Only one gate wing should be produced for both left and right turning gates. The welding parts are available in black steel or zinc plated.

SPECIFICATIONS

- 180° opening and closing angle
- Hot-dip galvanized eyebolt and Grip
- 500h salt spray resistant

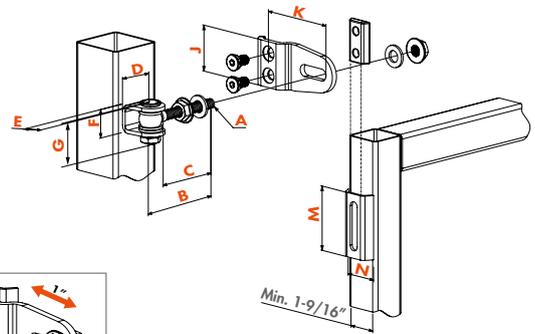

ORDER CODES

Welding parts in black steel (B)	Welding parts zinc plated (Z)	LBS	A	B	C
GBMU4D12-B-90	GBMUD12-Z-90	220 lbs	Eyebolt M12	Length 3-9/16"	2-3/4"
GBMU4D16-B-110 24h SHIPPING	GBMU4D16-Z-110	440 lbs	Eyebolt M16	Length 4-3/8"	3-3/8"
GBMU4D16-B-150	GBMU4D16-Z-150	440 lbs	Eyebolt M16	Length 5-7/8"	4-15/16"
GBMU4D20-B-130 24h SHIPPING	GBMU4D20-Z-130	880 lbs	Eyebolt M20	Length 5-1/8"	4-1/8"
GBMU4D20-B-150	GBMU4D20-Z-150	880 lbs	Eyebolt M20	Length 5-7/8"	4-1/2"



GBMU4DSHIELD (Patented)

4-way adjustable vandal-proof 180° hinge

Vandal-proof hot dip galvanized 180° hinge. This secured version of the GBMU4D16 hinge provides extra security since the eyebolt or cross bolt can not be tampered with. With the 4-way adjustability you no longer have to keep left or right turning gates in stock. Height, depth, left and right alignment and turning direction are individually adjustable.

SPECIFICATIONS

- 180° opening and closing angle
- Hot-dip galvanized eyebolt and Grip
- Vandal-proof Grip-shield included
- 500h salt spray resistant

COMPATIBLE HINGE PARTS



1001U
P. 141





KLAUW
P. 142



GRIP
P. 143



4DFIX-I
P. 142

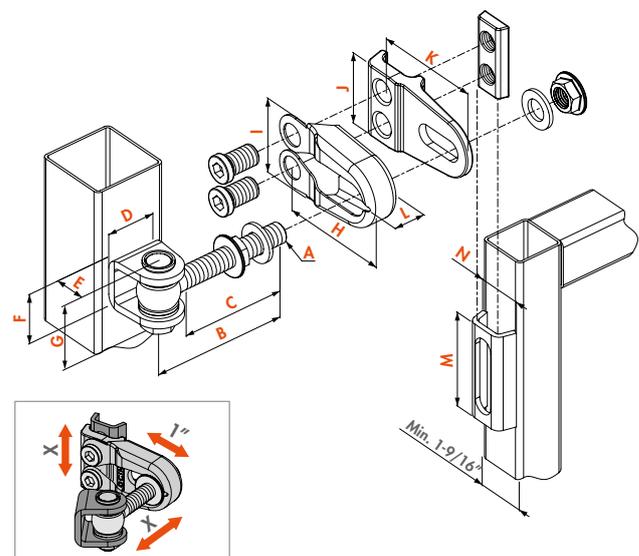


ORDER CODES

Welding parts in black steel (B)	Welding parts zinc plated (Z)	LBS	A	B	C	D	E	F	G	H	I	J	K	L	M	N
GBMU4DSHIELD-12-B-90	GBMU4DSHIELD-12-Z-90	220 lbs	M12	3-9/16"	2-3/4"	1-3/8"	15/16"	1-1/4"	1-7/8"	3-7/16"	2-3/16"	2"	3-3/8"	15/16"	2-3/4"	1-1/2"
GBMU4DSHIELD-16-B-110	GBMU4DSHIELD-16-Z-110	440 lbs	M16	4-5/16"	3-3/8"	1-9/16"	1-3/16"	1-5/8"	2-3/8"	3-9/16"	2-1/2"	2-3/8"	3-7/16"	1"	3-1/8"	1-7/16"

GBMU comparison

Industrial gate hinges

For industrial gates, we offer a wide range of strong and durable hinges. These 4-way adjustable hinges are hot-dip galvanized, have 180° opening angle and can be welded onto the gate post. For situations in which welding is not an option, we suggest the BOLTON range.

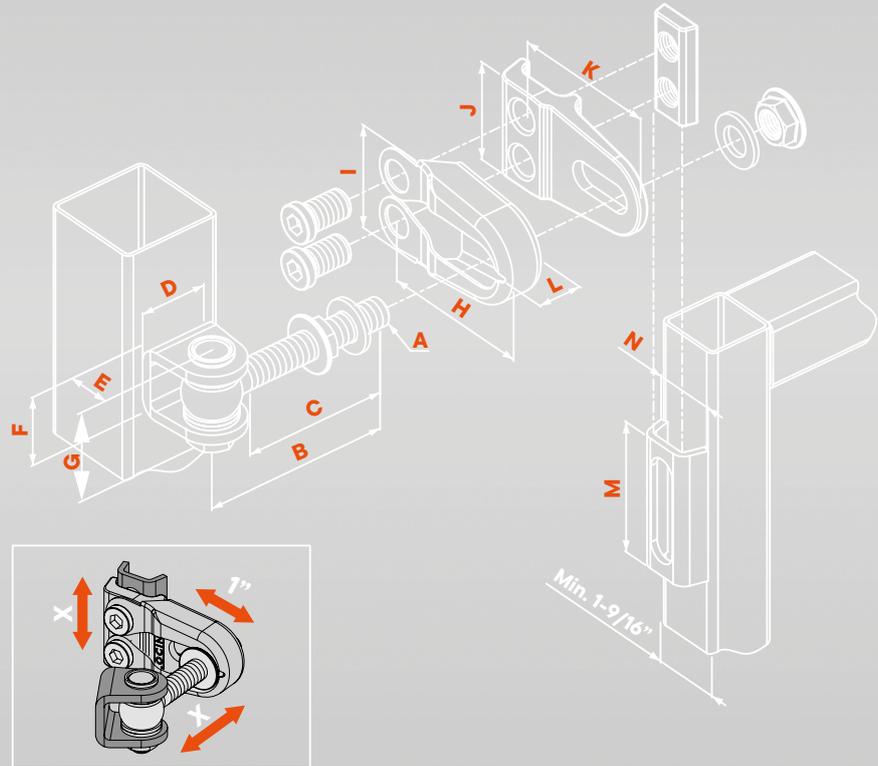

GBMU4D	lbs	INFORMATION													
		A	B	C	D	E	F	G	H	I	J	K	L	M	N
M12															
GBMU4D-B-M12-90	220 lbs	M12	3-9/16"	2-3/4"	1-3/8"	1"	1-1/4"	1-7/8"			2"	3-3/8"		2-3/4"	1-1/2"
GBMU4D-Z-M12-90	220 lbs	M12	3-9/16"	2-3/4"	1-3/8"	1"	1-1/4"	1-7/8"			2"	3-3/8"		2-3/4"	1-1/2"
M16															
GBMU4D-B-M16-110	440 lbs	M16	4-3/8"	3-3/8"	1-9/16"	1-3/16"	1-11/16"	2-3/8"			2-3/8"	3-1/2"		3-1/8"	1-1/2"
GBMU4D-Z-M16-110	440 lbs	M16	4-3/8"	3-3/8"	1-9/16"	1-3/16"	1-11/16"	2-3/8"			2-3/8"	3-1/2"		3-1/8"	1-1/2"
GBMU4D-B-M16-150	440 lbs	M16	5-7/8"	4-15/16"	1-9/16"	1-3/16"	1-11/16"	2-3/8"			2-3/8"	3-1/2"		3-1/8"	1-1/2"
GBMU4D-Z-M16-150	440 lbs	M16	5-7/8"	4-15/16"	1-9/16"	1-3/16"	1-11/16"	2-3/8"			2-3/8"	3-1/2"		3-1/8"	1-1/2"
M20															
GBMU4D-B-M20-130	880 lbs	M20	5-1/8"	4-1/8"	2-3/8"	1-3/8"	2"	2-13/16"			2-3/8"	4-1/16"		3-1/8"	1-7/16"
GBMU4D-Z-M20-130	880 lbs	M20	5-1/8"	4-1/8"	2-3/8"	1-3/8"	2"	2-13/16"			2-3/8"	4-1/16"		3-1/8"	1-7/16"
GBMU4D-B-M20-150	880 lbs	M20	5-7/8"	4-1/2"	2-3/8"	1-3/8"	2"	2-13/16"			2-3/8"	4-1/16"		3-1/8"	1-7/16"
GBMU4D-Z-M20-150	880 lbs	M20	5-7/8"	4-1/2"	2-3/8"	1-3/8"	2"	2-13/16"			2-3/8"	4-1/16"		3-1/8"	1-7/16"
SHIELD															
GBMU4DSHIELD-B-M12-90	220 lbs	M12	3-9/16"	2-3/4"	1-3/8"	15/16"	1-1/4"	1-7/8"	3-7/16"	2-3/16"	2"	3-3/8"	15/16"	2-3/4"	1-1/2"
GBMU4DSHIELD-Z-M12-90	220 lbs	M12	3-9/16"	2-3/4"	1-3/8"	15/16"	1-1/4"	1-7/8"	3-7/16"	2-3/16"	2"	3-3/8"	15/16"	2-3/4"	1-1/2"
GBMU4DSHIELD-B-M16-110	440 lbs	M16	4-5/16"	3-3/8"	1-9/16"	1-3/16"	1-5/8"	1-7/8"	3-7/16"	2-1/2"	2-3/8"	3-7/16"	1"	3-1/8"	1-7/2"
GBMU4DSHIELD-Z-M16-110	440 lbs	M16	4-5/16"	3-3/8"	1-9/16"	1-3/16"	1-5/8"	1-7/8"	3-7/16"	2-1/2"	2-3/8"	3-7/16"	1"	3-1/8"	1-7/2"

Gate wing standardization


 Time-saving

 Left/right reversible

 Easy to stack

 Only 1 drill pattern

One wing that works both ways

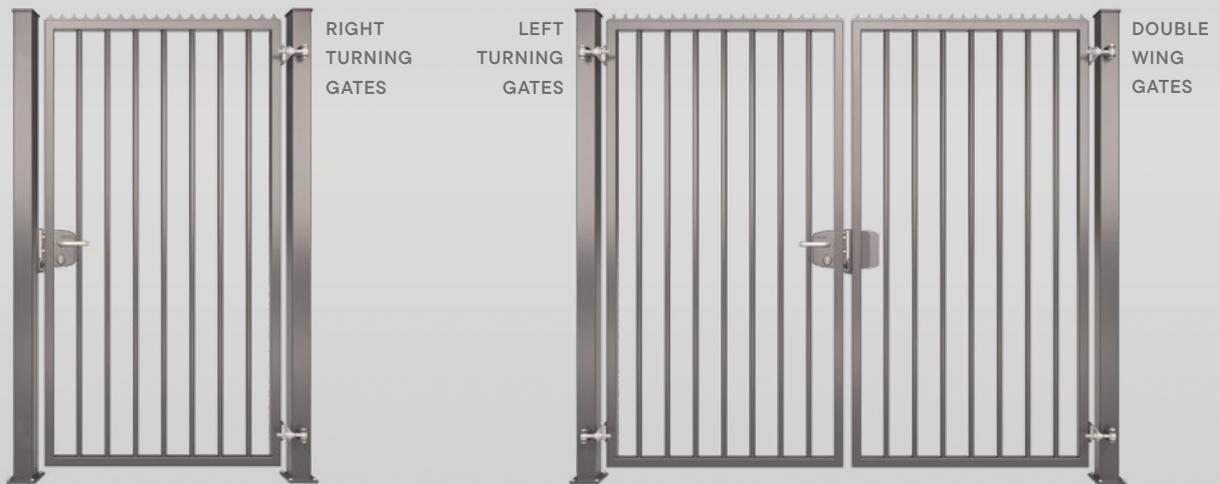

Advantages of wing standardization


EASY TO STACK AND TRANSPORT

A gate wing where the hardware such as hinges and locks can be installed afterwards. Easier to stack, to keep on stock and easier to transport!



HINGE, LOCK AND KEEP REVERSIBILITY

A gate wing can be used for left or right turning. Locinox locks and keeps are reversible and the hinges can be installed in both directions.

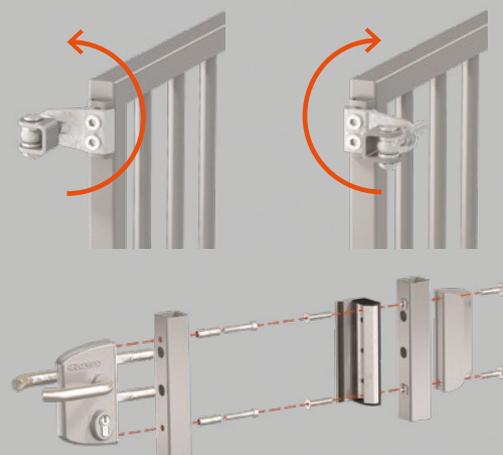



24h
SHIPPING


GBMU (Patented)

180° 3-way adjustable hinge

3-way adjustable hot-dip galvanized 180° hinge. Depth and spacing between gate and post are adjustable after installation. The welding parts are available in black steel or zinc plated.

SPECIFICATIONS

- Vandal-proof eyebolt & crossbolt
- 500h salt spray resistant

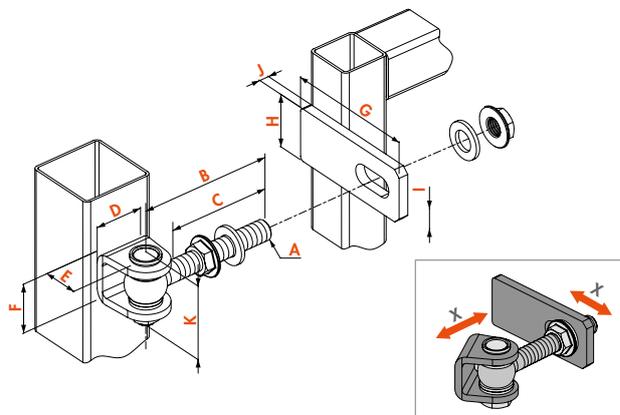

ORDER CODES

Welding parts in black steel (B)	Welding parts zinc plated (Z)	lbs	A	B	C	D	E	F	G	H	I	J	K
GBMU-B-M12-90	GBMU-Z-M12-90	220 lbs	M12	3-1/2"	2-3/4"	1-3/8"	1"	1-1/4"	3-1/2"	1-3/8"	1/2"	1/4"	1-7/8"
GBMU-B-M16-110 <small>24h SHIPPING</small>	GBMU-Z-M16-110	440 lbs	M16	4-3/8"	3-3/8"	1-5/8"	1-1/8"	1-5/8"	4-3/8"	1-3/4"	5/8"	5/16"	2-3/8"
GBMU-B-M16-150	GBMU-Z-M16-150	440 lbs	M16	5-7/8"	4-7/8"	1-5/8"	1-1/8"	1-5/8"	4-3/8"	1-3/4"	5/8"	5/16"	2-3/8"
GBMU-B-M18-105	GBMU-Z-M18-105	550 lbs	M18	4-1/8"	3-1/8"	1-5/8"	1-1/8"	1-5/8"	4-3/4"	2"	3/4"	5/16"	2-1/2"
GBMU-B-M18-150	GBMU-Z-M18-150	550 lbs	M18	5-7/8"	4-7/8"	1-5/8"	1-1/8"	1-5/8"	4-3/4"	2"	3/4"	5/16"	2-1/2"
GBMU-B-M20-130	GBMU-Z-M20-130	880 lbs	M20	5-1/8"	4-1/8"	2-3/8"	1-3/8"	2"	5-1/8"	2-3/8"	13/16"	1/2"	2-13/16"
GBMU-B-M20-150	GBMU-Z-M20-150	880 lbs	M20	5-7/8"	4-1/2"	2-3/8"	1-3/8"	2"	5-1/8"	2-3/8"	13/16"	1/2"	2-13/16"
GBMU-B-M22-145	GBMU-Z-M22-145	970 lbs	M22	5-3/4"	4-1/2"	2-3/8"	1-3/8"	2"	5-1/8"	2-3/8"	15/16"	1/2"	2-7/8"
GBMU-B-M22-160	GBMU-Z-M22-160	970 lbs	M22	6-1/4"	5-1/8"	2-3/8"	1-3/8"	2"	5-1/8"	2-3/8"	15/16"	1/2"	2-7/8"




1034HDGA (Patented)

Hot-dip galvanized eyebolt set

Eyebolt set hot dip galvanized. Vandal-proof.

SPECIFICATIONS

- Hot-dip galvanized bearing eyebolt, transverse bolt and screws
- Stainless steel ring (6 x DIN125A)
- Vandal and tamper proof
- 500h salt spray resistant

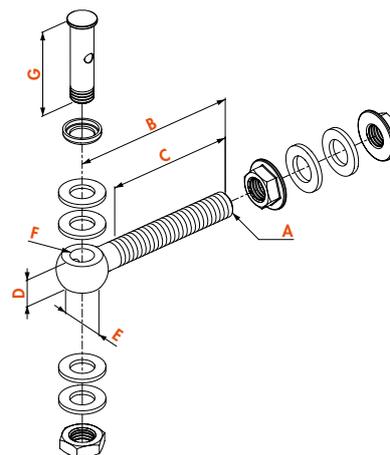

ORDER CODES

	A	B	C	D	E	F	G
1034HDGA-M12-90	M12	Length 3-9/16"	2-3/4"	9/16"	15/16"	Ø1/2"	1-7/8"
1034HDGA-M16-110	M16	Length 4-5/16"	3-3/8"	3/4"	1-1/4"	Ø9/16"	2-3/8"
1034HDGA-M16-150	M16	Length 5-15/16"	4-15/16"	3/4"	1-1/4"	Ø9/16"	2-3/8"
1034HDGA-M18-105	M18	Length 4-1/8"	3-1/8"	13/16"	1-7/16"	Ø5/8"	2-7/16"
1034HDGA-M18-150	M18	Length 5-15/16"	4-15/16"	13/16"	1-7/16"	Ø5/8"	2-7/16"
1034HDGA-M20-130	M20	Length 5-1/8"	4-1/8"	7/8"	1-9/16"	Ø3/4"	2-13/16"
1034HDGA-M20-150	M20	Length 5-15/16"	4-1/2"	7/8"	1-9/16"	Ø3/4"	2-13/16"
1034HDGA-M22-145	M22	Length 5-11/16"	4-1/2"	15/16"	1-5/8"	Ø13/16"	2-15/16"
1034HDGA-M22-160	M22	Length 6-5/16"	5-1/8"	15/16"	1-5/8"	Ø13/16"	2-15/16"




1034A2 (Patented)

Corrosion-resistant and vandal-proof eyebolt set

Corrosion-resistant and vandal-proof eyebolt set in stainless steel.

SPECIFICATIONS

- M16 Eyebolt set in stainless steel, including: eyebolt, cross bolt, nuts and washers
- Vandal and tamper proof
- 500h salt spray resistant

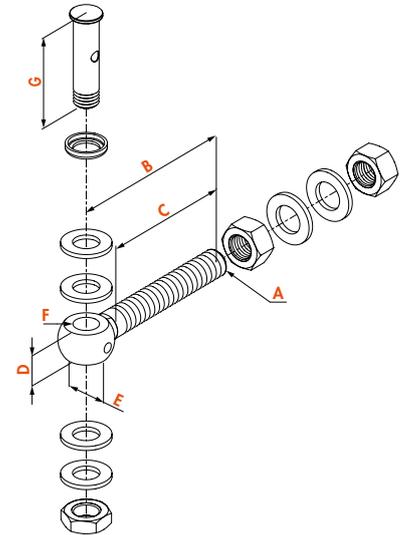

ORDER CODE

1034A2-M16-110-50

A	B	C	D	E	F	G
M16	Length 4-5/16"	3-3/8"	3/4"	1-1/4"	Ø9/16"	2-3/8"




1034ROLL-HDG

Hot-dip galvanized bearing eyebolt for 3D and 4D hinges

The bearing eyebolt can be integrated in any Locinox GBMU M16 and M20 hinge. The eyebolt ensures a smooth opening and closing and is perfect in combination with Locinox gate closers. It has a stainless steel anti-theft crossbolt.

SPECIFICATIONS

- Use with Locinox gate closers recommended
- Hot-dip galvanized bearing eyebolt, transverse bolt and screws
- Stainless steel ring (6 x DIN125A)
- Dual sealed stainless steel bearings
- Vandal and tamper proof
- 500h salt spray resistant

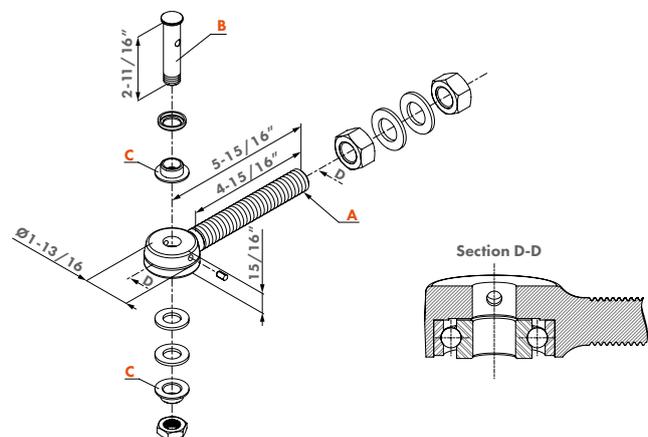

ORDER CODES

1034ROLL-HDG-M16


1034ROLL-HDG-M20

A	B	C
Eyebolt M16	Crossbolt Ø9/16"	
Eyebolt M20	Crossbolt Ø9/16"	Ø3/4" => Ø9/16"

Eyebolt set comparison

Eyebolt sets

Stainless steel or hot dip galvanized bearing eyebolts are essential for the connection between post and gate and enabling the rotating functionality of any hinge. We offer some vandal-proof options that can easily be combined with various other parts to become an industrial quality hinge. These sets include eyebolt, transverse or crossbolt and screws.

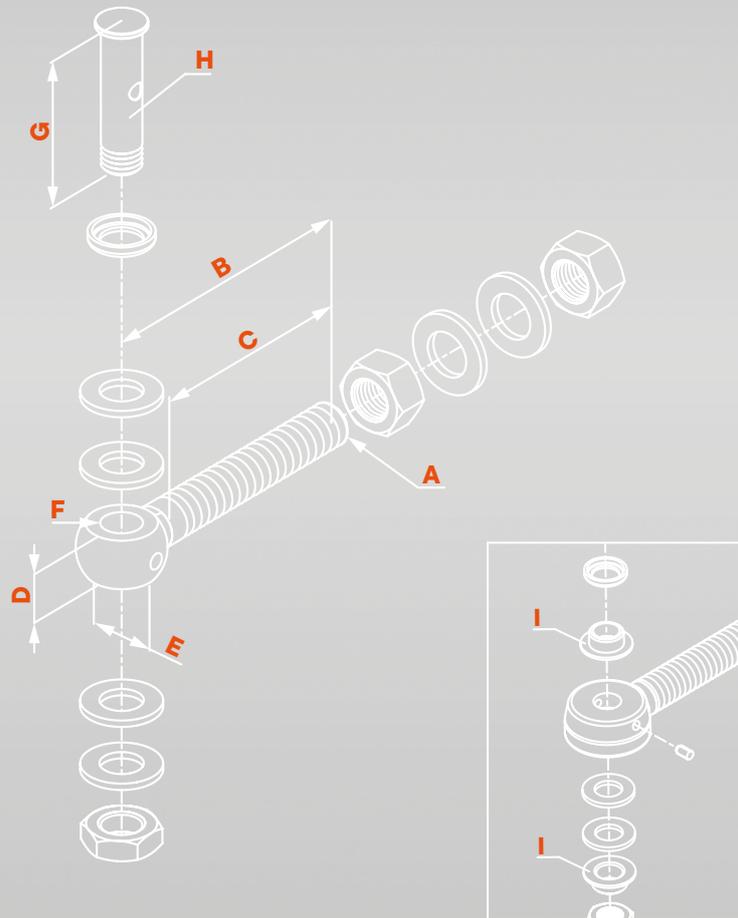

1034	INFORMATION								
	A	B	C	D	E	F	G	H	I
HDGA									
1034HDGA-M12-90	M12	3-9/16"	2-3/4"	9/16"	15/16"	Ø 1/2"	1-7/8"	Crossbolt 1/2"	
1034HDGA-M16-110	M16	4-5/16"	3-3/8"	3/4"	1-1/4"	Ø 9/16"	2-3/8"	Crossbolt 9/16"	
1034HDGA-M16-150	M16	5-15/16"	4-15/16"	3/4"	1-1/4"	Ø 9/16"	2-3/8"	Crossbolt 9/16"	
1034HDGA-M18-105	M18	4-1/8"	3-1/8"	13/16"	1-7/16"	Ø 5/8"	2-7/16"	Crossbolt 5/8"	
1034HDGA-M18-150	M18	5-15/16"	4-15/16"	13/16"	1-7/16"	Ø 5/8"	2-7/16"	Crossbolt 5/8"	
1034HDGA-M20-130	M20	5-1/8"	4-1/8"	7/8"	1-9/16"	Ø 3/4"	2-13/16"	Crossbolt 7/10"	
1034HDGA-M20-150	M20	5-15/16"	4-1/2"	7/8"	1-9/16"	Ø 3/4"	2-13/16"	Crossbolt 7/10"	
1034HDGA-M22-145	M22	5-11/16"	4-1/2"	15/16"	1-5/8"	Ø 13/16"	2-15/16"	Crossbolt 3/4"	
1034HDGA-M22-160	M22	6-5/16"	5-1/8"	15/16"	1-5/8"	Ø 13/16"	2-15/16"	Crossbolt 3/4"	
A2									
1034A2-M16-110-50	M16	4-5/16"	3-3/8"	3/4"	1-1/4"	Ø 9-16"	2-3/8"	Crossbolt 9/16"	
ROLL-HDG									
1034ROLL-HDG-M16	M16	5-15/16"	4-15/16"	15/16"	1-13/16"		2-11/16"	Crossbolt 9/16"	
1034ROLL-HDG-M20	M20	5-15/16"	4-15/16"	15/16"	1-13/16"		2-11/16"	Crossbolt 9/16"	Ø 3/4"→Ø 9/16"




INDUSTRIAL
HINGE PARTS



1001U

U-shaped ear plate in black steel

U-shaped ear plate in black steel for 180° hinges



SPECIFICATIONS

- U-shaped ear plate to weld on in black steel or zinc plated

ORDER CODES


Black steel (B)	Zinc plated (Z)	A	B	C	D	E
1001U-B-12	1001U-Z-12	1-3/8"	1-1/4"	15/16"	Ø1/2"	3/16"
1001U-B-16	1001U-Z-16	1-9/16"	1-5/8"	1-3/16"	Ø9/16"	1/4"
1001U-B-18	1001U-Z-18	1-9/16"	1-5/8"	1-3/16"	Ø11/16"	1/4"
1001U-B-20	1001U-Z-20	2-3/8"	2"	1-3/8"	Ø3/4"	5/16"
1001U-B-22	1001U-Z-22	2-3/8"	2"	1-3/8"	Ø13/16"	5/16"



1002M

Groove plate in black steel

Groove plate in black steel for 180° hinges

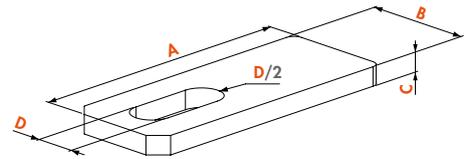

SPECIFICATIONS

- Black steel or zinc plated groove plate to weld on

ORDER CODES

Black steel (B)	Zinc plated (Z)	A	B	C	D
1002M-B-12	1002M-Z-12	3-9/16"	1-3/8"	1/4"	1/2"
1002M-B-16	1002M-Z-16	4-5/16"	1-3/4"	5/16"	11/16"
1002M-B-18	1002M-Z-18	4-3/4"	2"	5/16"	3/4"
1002M-B-20	1002M-Z-20	5-1/8"	2-3/8"	1/2"	13/16"
1002M-B-22	1002M-Z-22	5-1/8"	2-3/8"	1/2"	15/16"




KLAUW12

Gate claw (Special Order Only)

Black steel or zinc plated gate claw to weld on. Compatible with GBMU4DSHIELD-12.

SPECIFICATIONS

- Gate claw in black steel



ORDER CODES

Black steel (B)	Zinc plated (Z)	
KLAUW12-B	KLAUW12-Z	Compatible with GRIP12 & 4DFIX-I-13




KLAUW

Gate Claw

Black steel or zinc plated welding part for a precise, strong and aesthetic connection to (min.) 1-9/16" profiles. Compatible with GBMU4D16, GBMU4D20 and Bearing Hinge.

SPECIFICATIONS

- Gate claw in black steel or zinc plated



ORDER CODES

Black steel (B)

Zinc plated (Z)

KLAUW-B

KLAUW-Z

Compatible with GRIP16, GRIP20 & 4DFIX-1




4DFIX-I-12

Claw nut and bolts for 4D hinges

Hot-dip galvanized claw nut with stainless steel M10 bolts. Part of the GBMU4D12 hinge.

SPECIFICATIONS

- Claw nut hot-dip galvanized
- 2 stainless steel bolts M10 × 13/16"
- Component of the GBMU4DSHIELD12 hinge

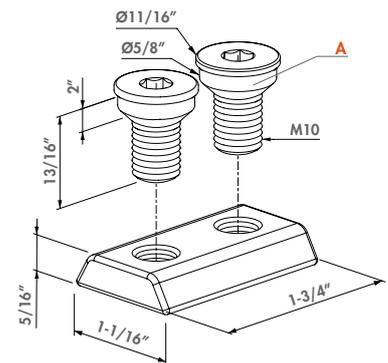

ORDER CODE

4DFIX-I-12

A

Bolts: M10x13/16" (2x)




4DFIX-I

Claw nut and bolts for 4D hinges (Special Order Only)

Hot-dip galvanized claw nut with stainless steel M16 bolts. Part of the GBMU4D16 and 20 hinge.

SPECIFICATIONS

- Claw nut hot-dip galvanized
- 2 bolts M16 × 1-1/4" in stainless steel
- Applicable for 4D16 and 4D20 hinges

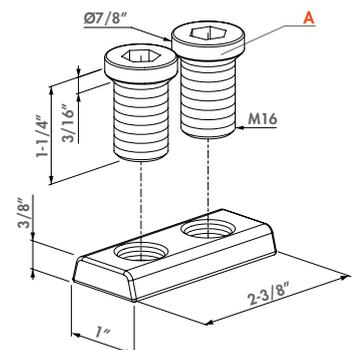

ORDER CODE

4DFIX-I

A

Bolts: M16 x 1-1/4" (2x)



GRIP

Fixation grip for hinge GBMU4D

Fixation grip for hinge GBMU4D12, GBMU4D16 ou GBMU4D20

COLOR OPTIONS

ALUM 9005 7016 6009 6005

SPECIFICATIONS

- Available in different colors
- Hot-dip galvanized steel

ORDER CODES

	A	B	C	D	E	F
GRIP12	1-15/16"	5/8"	4-1/4"	1-15/16"	Ø1/2"	1/4"
GRIP16	2-3/8"	13/16"	4-3/8"	2-3/8"	Ø11/16"	1/4"
GRIP20	2-3/8"	15/16"	5-1/16"	2-3/8"	Ø13/16"	5/16"



GRIP16-L

Fixation grip for hinge GBMU4D16 with larger depth adjustment

This extra long GRIP out of hot-dip galvanized steel allows you to center mount a gate on a fixed post from 2-3/4" up to 4-3/4". For GBMU4D16 hinge only.

SPECIFICATIONS

- Hot-dip galvanized steel
- Only to be used with GBMU4D16 hinge
- Compatible eyebolt set: 1034HDGA-M16 or 1034ROLL-M16

ORDER CODE

GRIP16-L-



G90Z (Patented)

90° adjustable hinge

Hot-dip galvanized 90° hinge. The perfect solution for all your small industrial gates.

24h
SHIPPING

SPECIFICATIONS

- 90° opening
- Nut in black steel for welding
- Earplate in black steel or cold zinc plated
- Vandal and tamper proof
- 500h salt spray resistant

HINGE PARTS




1036
P. 146



1039SET
P. 145



1127
P. 146

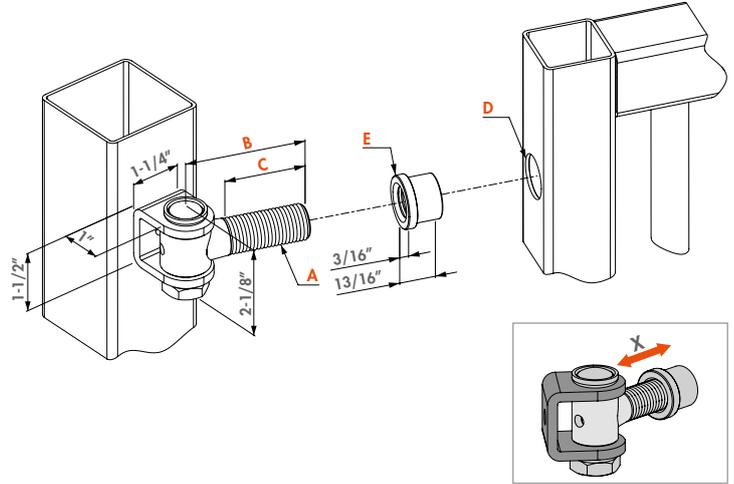

ORDER CODES

Welding parts in black steel (B)	Welding parts zinc plated (Z)	LBS	A	B	C	D	E
G90Z-B-M16-65	G90Z-Z-M16-65	330 lbs	M16	2-1/2"	1-7/8"	Ø7/8"	Ø1"
G90Z-B-M16-110	G90Z-Z-M16-110	330 lbs	M16	3-5/16"	3-5/8"	Ø7/8"	Ø1"
G90Z-B-M16-150	G90Z-Z-M16-150	330 lbs	M16	5-7/8"	5-2/8"	Ø7/8"	Ø1"
G90Z-B-M20-67	G90Z-Z-M20-67	660 lbs	M20	2-5/8"	1-3/4"	Ø1"	Ø1-1/8"
G90Z-B-M20-150	G90Z-Z-M20-150	660 lbs	M20	5-7/8"	5"	Ø1"	Ø1-1/8"

G90LR (Patented)

Vandal-proof one way 90° hinge with adjustable welding nut

Vandal-proof hot-dip galvanized 90° hinge. This hinge is the perfect solution for all your small industrial gates. The eyebolt can not be tampered with when the gate is closed. With the LR welding nut you can easily adjust the hinge.



SPECIFICATIONS

- 90° opening
- Adjustable nut zinc plated
- Zinc-plated earplate
- Vandal and tamper proof
- 500h salt spray resistant

HINGE PARTS




1036-Z
P. 146



1039SET
P. 145



LR
P. 149

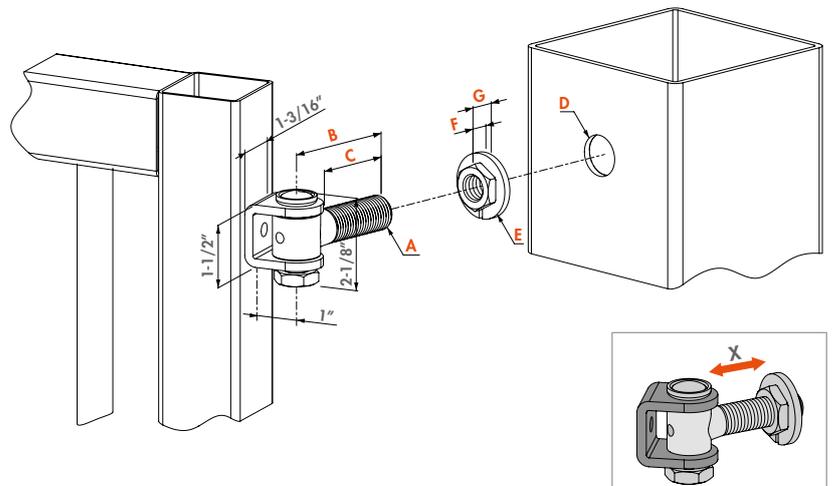

ORDER CODES

Welding parts zinc plated (Z)	LBS	A	B	C	D	E	F	G
G90LR-Z-M16-65	330 lbs	M16	Length 2-9/16"	1-7/8"	Ø1"	Ø1-1/2"	3/8"	9/16"
G90LR-Z-M16-110	330 lbs	M16	Length 4-5/16"	3-5/8"	Ø1"	Ø1-1/2"	3/8"	9/16"
G90LR-Z-M16-150	330 lbs	M16	Length 5-15/16"	5-3/16"	Ø1"	Ø1-1/2"	3/8"	9/16"
G90LR-Z-M20-67	660 lbs	M20	Length 2-5/8"	1-3/4"	Ø1-1/4"	Ø1-13/16"	7/16"	11/16"
G90LR-Z-M20-150	660 lbs	M20	Length 5-15/16"	5-1/16"	Ø1-1/4"	Ø1-13/16"	7/16"	11/16"



G90WP (Patented)

Vandal-proof one way 90° hinge with adjustable steel wall plate

Vandal-proof hot-dip galvanized 90° hinge. This secured hinge is the perfect solution for all your small and medium-sized gates. The eyebolt can not be tampered with when the gate is closed. Thanks to the wall plate with adjustable nut you can easily adjust the hinge.

SPECIFICATIONS

- 90° opening
- Wall plate with adjustable nut
- Black steel ear plate for welding
- Vandal and tamper proof
- 500h salt spray resistant

HINGE PARTS




1036-B
P. 146



1039SET
P. 145



1005WP
P. 149

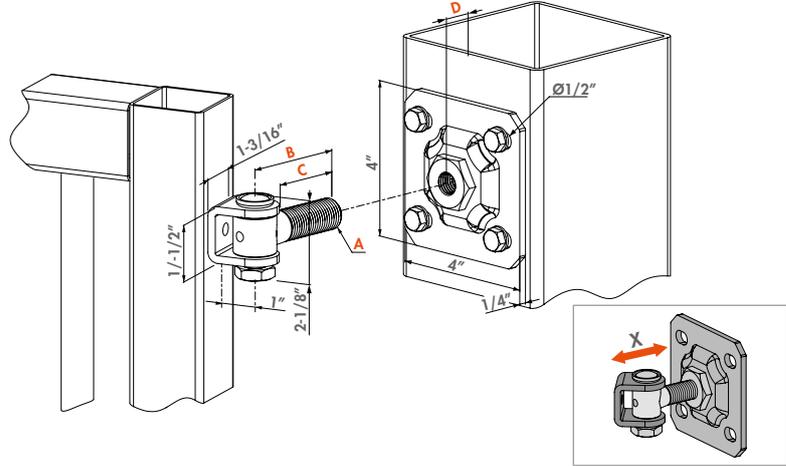

ORDER CODES

Welding parts in black steel (B)

	LBS	A	B	C	D
G90WP-B-M16-65	330 lbs	M16	Length 2-9/16"	1-7/8"	3/4"
G90WP-B-M16-110	330 lbs	M16	Length 4-5/16"	3-5/8"	3/4"
G90WP-B-M16-150	330 lbs	M16	Length 5-15/16"	5-3/16"	3/4"
G90WP-B-M20-67	660 lbs	M20	Length 2-5/8"	1-3/4"	13/16"
G90WP-B-M20-150	660 lbs	M20	Length 5-15/16"	5-1/16"	13/16"




1039SET (Patented)

Eyebolt set for earplate 1036

Eyebolt set for earplate 1036

SPECIFICATIONS

- Eyebolt and hot-dip galvanized bolt
- 500h salt spray resistant

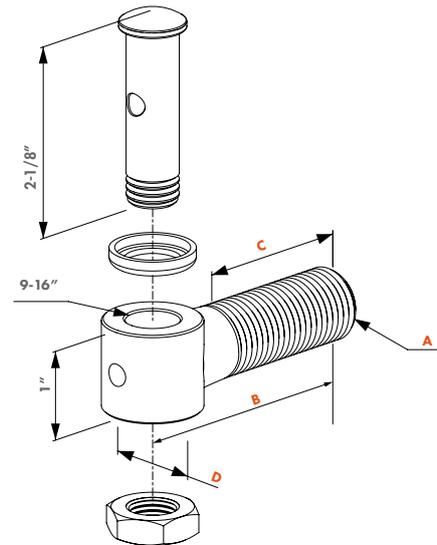

ORDER CODES

Hot-dip galvanized eyebolt set

	A	B	C	D
1039SET-M16-65	M16	Length 2-9/16"	1-7/8"	15/16"
1039SET-M16-110	M16	Length 4-5/16"	3-5/8"	15/16"
1039SET-M16-150	M16	Length 5-15/16"	5-3/16"	15/16"
1039SET-M20-67	M20	Length 2-5/8"	1-3/4"	1-1/16"
1039SET-M20-150	M20	Length 5-15/16"	5-1/16"	1-1/16"



1036


Earplate for eyebolt 1039SET (Special Order Only)

Earplate for hinge 1039SET

24h
SHIPPING

SPECIFICATIONS

- U-shaped ear plate to weld on in black steel or zinc plated
- Compatible with hinge 1039SET-M16 and M20



ORDER CODES

Black steel (B)	Zinc plated (Z)	A
1036-B	1036-Z	For crossbolt $\varnothing 9/16"$




1127

Weld nut (Special Order Only)

M16 or M20 weld nut

SPECIFICATIONS

- Compatible with hinge 1039SET
- Black steel or zinc plated welding nut



ORDER CODES

For eyebolt	Zinc plated (Z)	A	B	C	D
1127-M16	1127-Z-M16	$\varnothing 1"$	$\varnothing 13/16"$	$3/16"$	$13/16"$
1127-M20	1127-Z-M20	$\varnothing 1-3/16"$	$\varnothing 1"$	$3/16"$	$13/16"$

G-ORNA-WP

Ornamental hinge set with wall plate

Hot-dip galvanized hinge set including greaser and wall plate with adjustable nut for ornamental gates.



SPECIFICATIONS

- Ornamental hinge set
- Black steel or zinc plated welding base
- Hot-dip galvanized wall plate
- Hot-dip galvanized clamp hinge with stainless steel bolt
- Welding base 1-3/8" x 1-3/8", M20 clamp hinge


HINGE PARTS



1002B
P. 148

1004ORNA
P. 148

1005WP-M20
P. 149

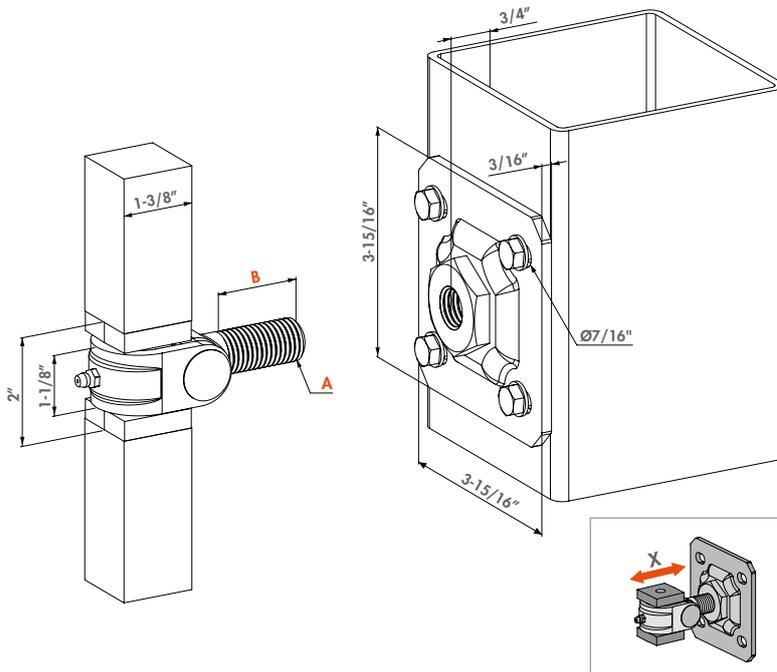

ORDER CODES

Welding block in black steel (B)

G-ORNA-WP-B-M20

	A	B
660 lbs	M20	Length 1-9/16"

G-ORNA-LR

Ornamental hinge set

Hot-dip galvanized hinge set including grease fitting and adjustable nut for ornamental gates.



SPECIFICATIONS

- Ornamental hinge set
- Black steel or zinc plated welding base
- Zinc plated adjustable nut
- Hot-dip galvanized clamp hinge with stainless steel bolt


HINGE PARTS



1002B
P. 148

1004ORNA
P. 148

LR
P. 149

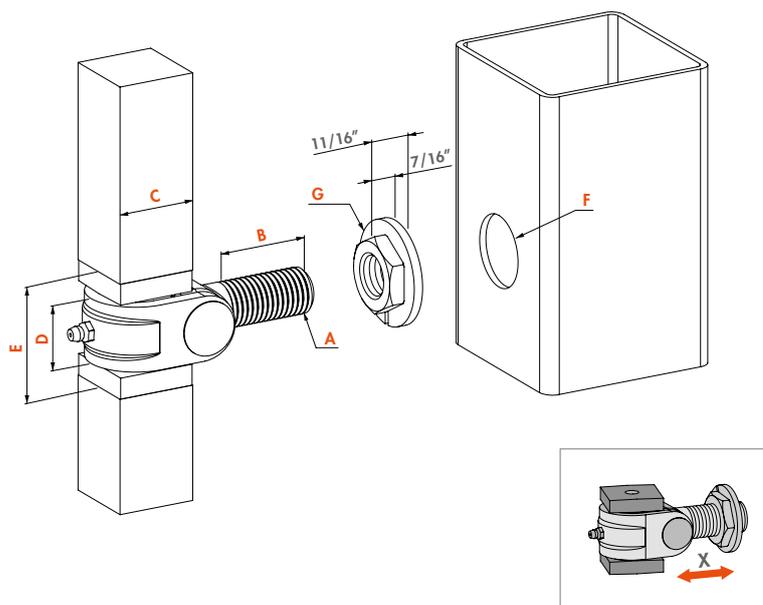

ORDER CODES

Welding block in black steel (B)

G-ORNA-LR-B-M20

G-ORNA-LR-B-M24

G-ORNA-LR-B-M27

	A	B	C	D	E	F	G
660 lbs	M20	Length 1-9/16"	Welding base 1-3/8"	1-1/8"	2-1/16"	Ø1-1/4"	Ø1-13/16"
880 lbs	M24	Length 1-3/4"	Welding base 1-9/16"	1-5/16"	2-1/4"	Ø1-3/8"	Ø2"
1100 lbs	M27	Length 2-3/8"	Welding base 2"	1-9/16"	2-7/16"	Ø1-1/2"	Ø2-1/16"




1004ORNA

Clamp hinge

Hot-dip galvanized clamp hinge.

SPECIFICATIONS

- Hot-dip galvanized clamp hinge with stainless steel bolt

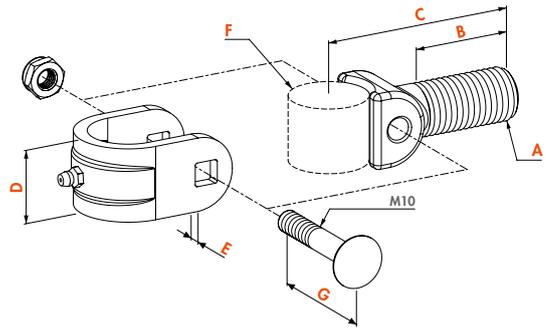

ORDER CODES

	A	B	C	D	E	F	G
1004ORNA-M20	M20	Length 1-9/16"	3-3/16"	1-1/8"	1/4"	Ø1-3/16"	2-3/16"
1004ORNA-M24	M24	Length 1-3/4"	3-1/2"	1-5/16"	1/4"	Ø1-3/8"	2-3/8"
1004ORNA-M27	M27	Length 2-9/16"	4-3/16"	1-9/16"	1/4"	Ø1-9/16"	2-9/16"




1002B

Welding block for ornamental hinge

Black steel welding bloc for ornamental clamp hinges.

SPECIFICATIONS

- Black steel welding base



ORDER CODES

Black steel (B)	A	B	C	D
1002B-B-35	2-1/16"	1-1/4"	1-3/8"	Ø1-3/16"
1002B-B-40	2-1/4"	1-7/16"	1-9/16"	Ø1-3/8"
1002B-B-50	2-7/16"	1-5/8"	2"	Ø1-9/16"






LR

Adjustable nut (Special Order Only)

Zinc-plated adjustable welding nut for ornamental gates. With this system you can finetune your ornamental gate.

SPECIFICATIONS

- Adjustable welding nut, zinc-plated



ORDER CODES

	A	B	C
LR-M16	Ø1-1/2"	5/8"	7/16"
LR-M20	Ø1-13/16"	11/16"	7/16"
LR-M24	Ø2"	11/16"	7/16"
LR-M27	Ø2-1/16"	11/16"	7/16"




1005WP

Wall plate hot-dip galvanized

Hot-dip galvanized wall plate with adjustable nut for garden gate hinges.

SPECIFICATIONS

- Steel wallplate hot dip galvanized



ORDER CODES

	A	B	C	D	E	F
1005WP-M12	M12	2-3/8"	9/16"	1/8"	3/16"	Ø1/4"
1005WP-M16	M16	3-15/16"	3/4"	3/16"	3/16"	Ø7/16"
1005WP-M20	M20	3-15/16"	13/16"	3/16"	3/16"	Ø7/16"



24h
SHIPPING


3DM (Patented)

180° 3-WAY ADJUSTABLE ORNAMENTAL HINGE

Stainless steel hinge for aluminum and steel gates equipped with the fast Quick-Fix mounting hardware. The hinge is adjustable in three dimensions; height, left/right alignment and swing direction. Also available with hot-dip galvanized arm. This hinge is made to fit a 4" square post and a 1-1/2" to 2" gate frame.

SPECIFICATIONS

- 180° hinge for metal & aluminum gates with 4" Posts
- Innovative Quick-Fix mounting
- Reversible for left or right hand swing gates
- 5/8" adjustable in width, 3/8" in height and 5/8" in depth
- Vandal and tamper proof
- Hinge socket, axle and socket cover plate in stainless steel

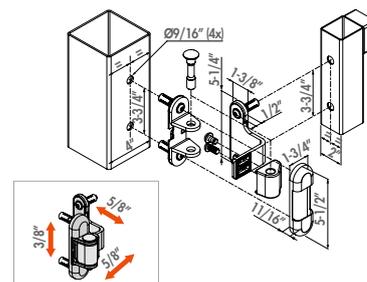

ORDER CODES

Hinge arm in stainless steel	Hinge arm in hot-dip galvanized steel	lbs	A
3DM-VP100-P50-A2	3DM-VP100-P50-HDG	330 lbs	For Quick-Fix Ø5/8"



HINGES FOR
INDUSTRIAL GATES



24h
SHIPPING


BEARING HINGE

90° 2-Way adjustable bearing hinge

Stainless steel maintenance free bearing hinge for mounting on all your automated gate projects. The hinge is adjustable in height and width.

SPECIFICATIONS


- Specially developed for automated gates
- Rust resistant housing
- Maintenance free sealed bearing
- Can be used as top & bottom hinge

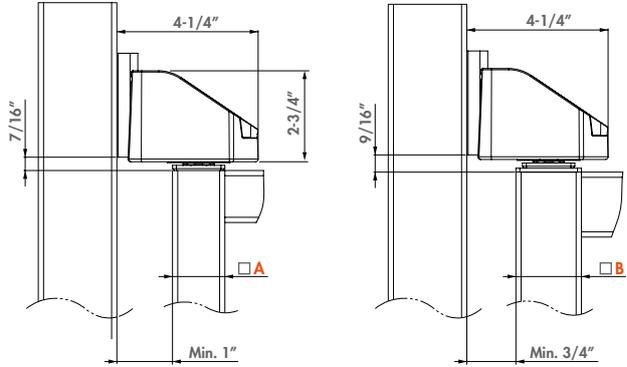

HINGE PART



KLAUW
P. 142



ORDER CODE

BEARING HINGE

440 lbs

A **B**
Gate frame 1-9/16" x 1-9/16" 2" x 2"



24h
SHIPPING

DINO

2-WAY ADJUSTABLE DOUBLE BEARING HINGE

The Dino hinge is a double bearing hinge in an aluminum housing. The stainless steel bearings guarantee a smooth opening and closing of the gate. Easy to install with Quick-Fix.

COLOR OPTIONS




SPECIFICATIONS

- Aesthetic design & powder coated aluminum housing
- Mounting Hardware: Anti-theft & vandal-proof
- Fast and easy fixation with Quick-Fix bolts

COMPATIBLE GATE CLOSER



MAMMOTH180
P. 20

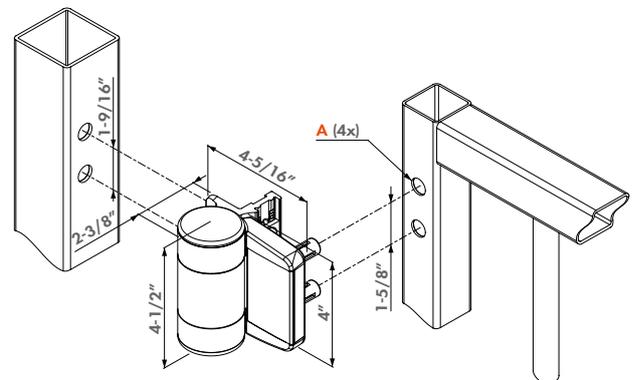

ORDER CODE

DINO

330 lbs

A
For Quick-Fix Ø9/16"



24h
SHIPPING


NOSEHINGE-I

Compact, 2-way 90° hinge

Adjustable and compact 90° hinge. The inner parts are made out durable extruded aluminum and guarantee thus a long life span. Easy installation guaranteed thanks to our patented Quick-Fix bolts. Given its sleek and aesthetic design, Nosehinge is a perfect fit for residential gates. For 2" gate frames only.

SPECIFICATIONS

- Made out of extruded aluminium parts with plastic covers
- Easy to fix with Quick-Fix
- For left and right handed gates
- 5/8" width adjustable and 1" depth adjustable
- Includes two hinges, one for bottom and one for top
- Includes DURA-5050 gate plug for 2" gate frames
- Max width of the gate: 98-7/16"
- Max weight of the gate: 265 lbs

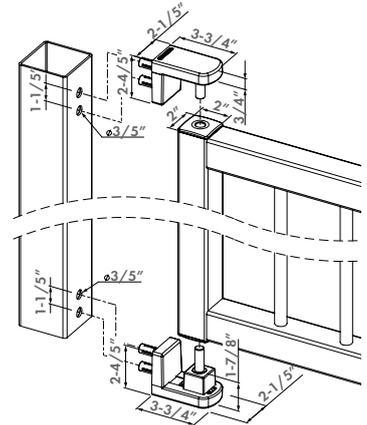

ORDER CODE

NOSEHINGE-I-50

Gate frame 2" x 2"

HINGES FOR INDUSTRIAL GATES



24h
SHIPPING


NOSEHINGE-A

Compact, 2-way 90° hinge

Adjustable and compact 90° hinge. The inner parts are made out durable extruded aluminum and guarantee thus a long life span. Easy installation guaranteed thanks to our patented Quick-Fix bolts. Given its sleek and aesthetic design, Nosehinge is a perfect fit for residential gates.

SPECIFICATIONS

- Made out of extruded aluminium parts with plastic covers
- Easy to fix with Quick-Fix
- For left and right handed gates
- 5/8" width adjustable and 1" depth adjustable
- Includes two hinges
- Max width of the gate: 98-7/16"
- Max weight of the gate: 265 lbs
- Compatible with DURA-4040-16 & DURA-5050-16

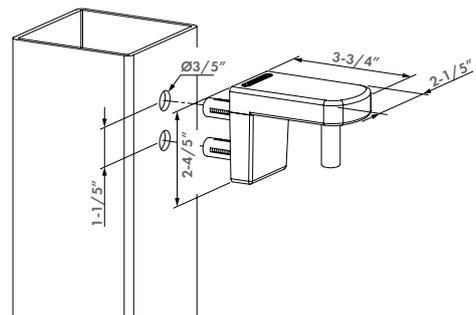

ORDER CODE

NOSEHINGE-A

A
Ø1/2"



24h
SHIPPING

PUMA

Compact 2-way adjustable 180° surface mounted hinge

The Puma hinge is a compact surface mounted hinge with a powder coated aluminum housing. Its 180° opening angle together with its vertical and horizontal adjustability make the hinge flexible. Simple to install thanks to the Quick-Fix fastening system; no welding needed. This hinge easily supports gates up to 3.5 ft wide and 132 lbs. The Puma hinge's aesthetic design perfectly fits aluminum and smaller residential gates.

COLOR OPTIONS




SPECIFICATIONS

- For gates up to 3.5 ft wide and 135 lbs
- For left and right opening gates
- 5/8" adjustable in width and 7/8" in height
- No welding required: drill holes and fix with Quick-Fix

COMPATIBLE WITH TIGER GATE CLOSER



TIGER
P. 19

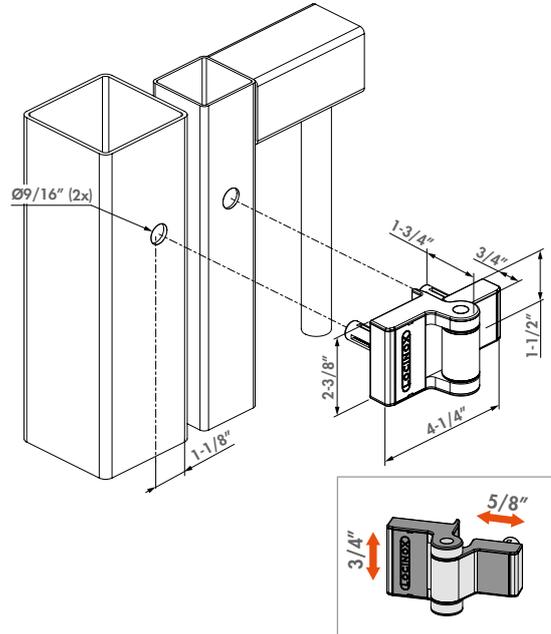

ORDER CODE

PUMA

132 lbs 2 x Quick-Fix

SWING40 (Patented)

Spring hinge for garden gates



Adjustable spring hinges for garden and walk gates. The set can be fitted inside 1-1/2", 16 Ga tubing. The SWING can easily be adjusted in strength from outside by means of an Allen key.



24h
SHIPPING

SPECIFICATIONS

- One for the top, one for the bottom
- Installation: slides into top and bottom of gate frame
- Only for gate frames 1-1/2" sq, 16 & 14 gauge
- Reversible: left or right hand
- Adjustable spring tension using 1/8" allen wrench
- Maximum gate width: 51"
- Maximum weight: 165 lbs
- Maximum profile thickness: 5/64"

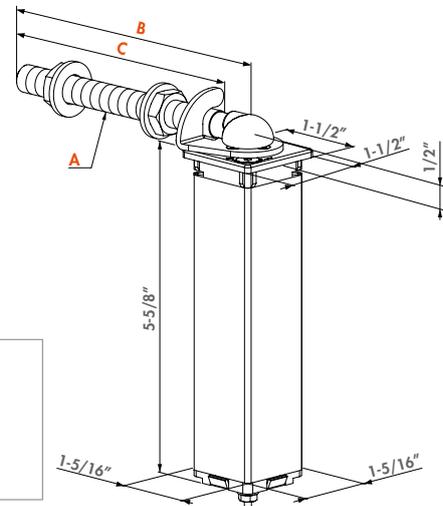

ORDER CODES

Hangerbolt length

SWING40-130
SWING40-150

		A	B	C
SWING40-130	165 lbs	M12	Length 5-1/8"	4-5/16"
SWING40-150	165 lbs	M12	Length 5-15/16"	5-1/8"



GBM12

J-Bolt Stainless steel with polyamide plugs

Stainless steel garden gate J-Bolt hinge set. The set consist of 2 threaded M12 stainless steel hinge bolts with polyamide hinge plugs. The poly plugs fit into the top and bottom of the gate upright for an economical quality solution for small garden and walk gate projects.

SPECIFICATIONS

- Hinge J-bolt M12 in stainless steel
- Plug available for profile 1-1/2" or 2" square
- Length of the threaded J-bolt: 5-1/8" or 6" long
- Installation: plug slides into gate upright top and bottom

HINGE PART




1040TPSM12
P. 158

ORDER CODES

For square profiles 1-3/16" x 1-3/16"

For square profiles 1-1/2" x 1-1/2"

			A	B	C
GBM12-30-130	GBM12-40-130	130 lbs	M12	Length 5-1/8"	4-5/16"
GBM12-30-150	GBM12-40-150	130 lbs	M12	Length 5-15/16"	5-1/8"

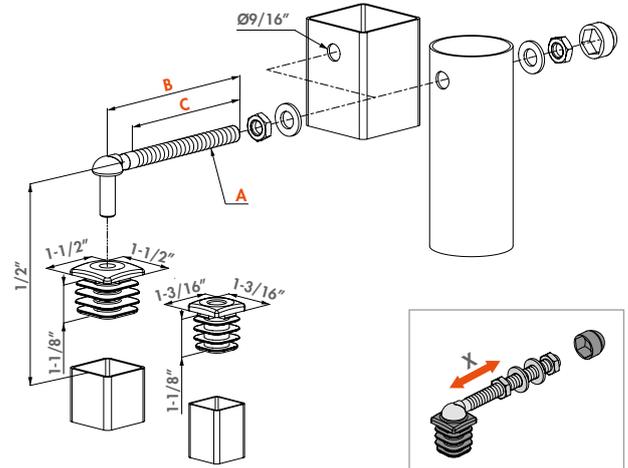

GBM12-DP40 (Patented)

J-Bolt Stainless steel with aluminum plugs

Stainless steel garden gate hinge set with reinforced aluminum plugs for extra stability. The economical quality solution for all your garden/walk gate projects.

SPECIFICATIONS

- Hinge set with aluminum reinforced hinge post plugs
- Hinge J-bolt M12 in stainless steel
- Plug available for profile 1-1/2" square
- Length of the threaded J-bolt: 5-1/8" or 6" long
- Installation: plug slides into gate upright top and bottom

HINGE PARTS




1040TPSM12 DURA
P. 158 P. 158

ORDER CODES

Hangerbolt length

			A	B	C
GBM12-DP-40-130		165 lbs	M12	Length 5-1/8"	4-5/16"
GBM12-DP-40-150		165 lbs	M12	Length 5-15/16"	5-1/8"

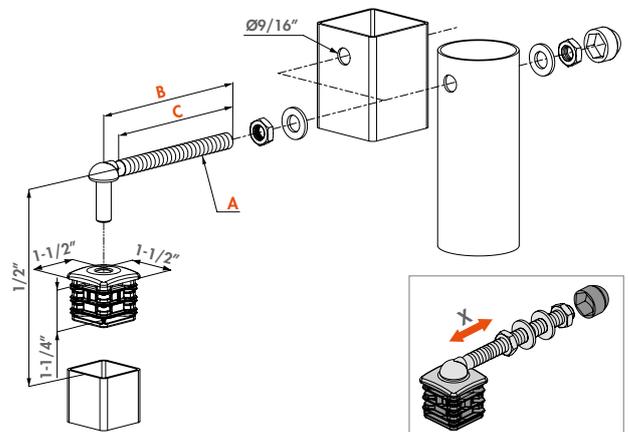

GBM16

J-Bolt Stainless steel with polyamide plugs



Hot-dip galvanized J-Bolt hinge set. The set consist of 2 threaded M16 galvanized hinge bolts with polyamide hinge plugs. The reinforced plugs fit into the top and bottom of the gate upright for an economical quality solution for your walk gate projects.

SPECIFICATIONS

- With plastic hinge plug square 9/16"
- Hinge axle M16 in hot-dip galvanized steel
- Length of the threaded J-bolt: 6-1/4" or 7"
- Installation: plug slides into gate upright top and bottom


HINGE PART



1040HDSM16
P. 158

ORDER CODES

Hangerbolt length	lbs	A	B	C
GBM16-40-160	165 lbs	M16	Length 6-5/16"	5-5/16"
GBM16-40-180	165 lbs	M16	Length 7-1/16"	6-1/8"

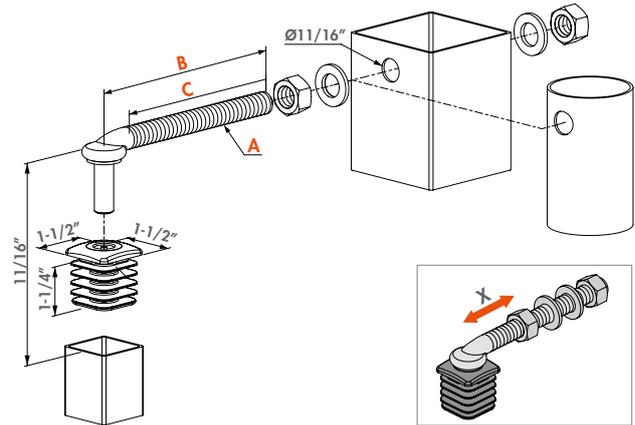

GBM16-DP (Patented)

J-Bolt Stainless steel with aluminum plugs



Hot-dip galvanized steel garden gate hinge set with reinforced aluminum plugs for extra stability. The economical quality solution for all your garden/walk gate projects.

SPECIFICATIONS

- Hinge set with aluminum reinforced hinge post plugs
- Hinge axle M16 in hot-dip galvanized steel
- Plug available for profile 1-1/2" or 2" square
- Length of the threaded J-bolt: 6-1/4" or 7"
- Installation: plug slides into gate upright top and bottom


HINGE PARTS



1040HDSM16 DURA
P. 158 P. 158

ORDER CODES


For square profiles 1-1/2" x 1-1/2"	For square profiles 2" x 2"	lbs	A	B	C
GBM16-DP-40-160	GBM16-DP-50-160	220 lbs	M16	Length 6-5/16"	5-5/16"
GBM16-DP-40-180	GBM16-DP-50-180	220 lbs	M16	Length 7-1/16"	6-1/8"

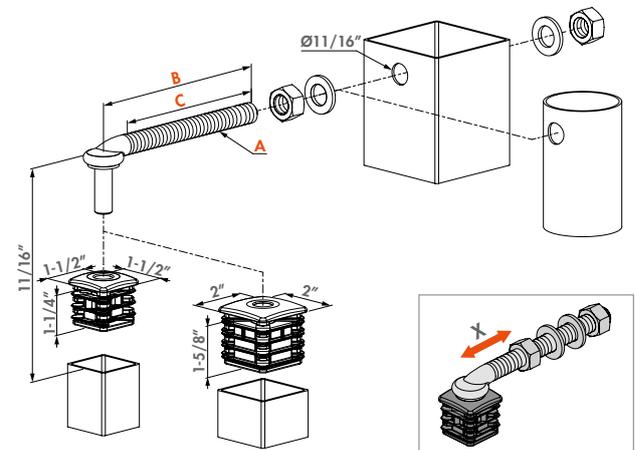

GBM comparison

Garden gates hinges

We have several economical quality solutions for garden or pedestrian gates. These are made of stainless steel or hot-dip galvanized steel and come with polyamide or aluminum plugs for fixation in the gate profile.

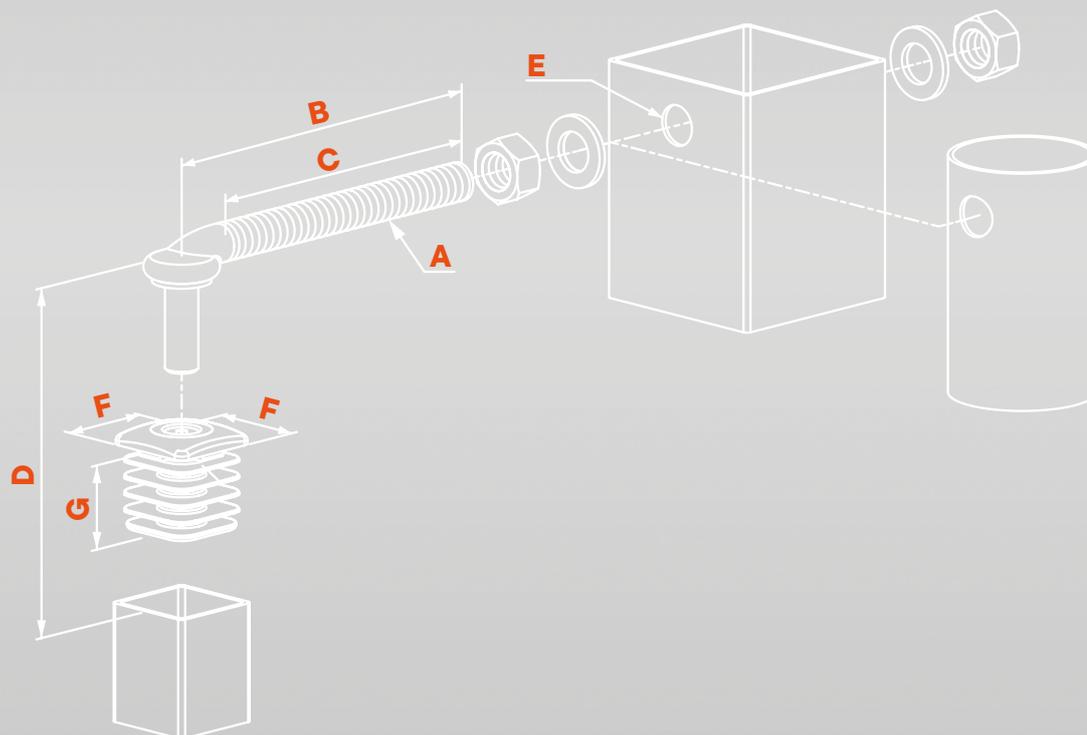

GBM	lbs	MATERIAL	INFORMATION						
			A	B	C	D	E	F	G
12									
GBM12-30-130	130 lbs	Polyamide	M12	5-1/8"	4-5/16"	1/2"	Ø 9/16"	1-3/16"	1-1/8"
GBM12-40-130	130 lbs	Polyamide	M12	5-1/8"	4-5/16"	1/2"	Ø 9/16"	1-1/2"	1-1/8"
GBM12-30-150	130 lbs	Polyamide	M12	5-15/16"	5-1/8"	1/2"	Ø 9/16"	1-3/16"	1-1/8"
GBM12-40-150	130 lbs	Polyamide	M12	5-15/16"	5-1/8"	1/2"	Ø 9/16"	1-1/2"	1-1/8"
12-DP						1/2"	Ø 9/16"		
GBM12-DP40-130	165 lbs	Aluminum	M12	5-1/8"	4-5/16"	1/2"	Ø 9/16"	1-1/2"	1-1/4"
GBM12-DP40-150	165 lbs	Aluminum	M12	5-15/16"	5-1/8"	1/2"	Ø 9/16"	1-1/2"	1-1/4"
16									
GBM16-40-160	165 lbs	Polyamide	M16	6-5/16"	5-5/16"	11/16"	Ø 11/16"	1-1/2"	1-1/4"
GBM16-40-180	165 lbs	Polyamide	M16	7-1/16"	6-1/8"	11/16"	Ø 11/16"	1-1/2"	1-1/4"
16-DP						11/16"	Ø 11/16"		
GBM16-DP40-160	220 lbs	Aluminum	M16	6-5/16"	5-5/16"	11/16"	Ø 11/16"	1-1/2"	1-1/4"
GBM16-DP50-160	220 lbs	Aluminum	M16	6-5/16"	5-5/16"	11/16"	Ø 11/16"	2"	1-5/8"
GBM16-DP40-180	220 lbs	Aluminum	M16	1-1/4"	6-1/8"	11/16"	Ø 11/16"	1-1/2"	1-1/4"
GBM16-DP50-180	220 lbs	Aluminum	M16	1-1/4"	6-1/8"	11/16"	Ø 11/16"	2"	1-5/8"

GAM12

90° 2-WAY ADJUSTABLE J-BOLT HINGE

Stainless steel garden gate J-Bolt hinge set. The set consists of 2 threaded M12 stainless steel hinge bolts with 2 black steel welding ears. The economical quality solution for your garden and walk gate projects.



24h
SHIPPING

SPECIFICATIONS

- Hinge J-bolt M12 in stainless steel
- Length of the threaded J-bolt: 5-1/8" or 6" long
- Welding ear in black steel


HINGE PARTS



1040TPSM12
P. 158



1041-01
P. 158

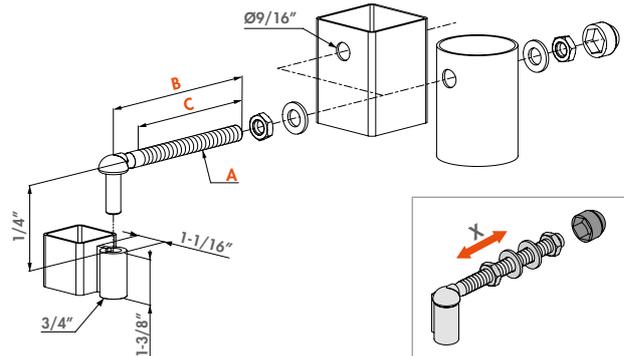

ORDER CODES

Hangerbolt length	LBS	A	B	C
GAM12-130	220 lbs	M12	Length 5-1/8"	4-5/16"
GAM12-150	220 lbs	M12	Length 5-15/16"	5-1/8"






1041-01

Welding ear in black steel

Welding ear in black steel. Compatible with hinge axle 1040TPS-M12. Just weld on the ear to your gate and it's ready for coating. A basic hinge solution for your small garden gates.



SPECIFICATIONS

- Component of the GAM12 hinge

ORDER CODE

1041-01

A


For hangerbolt axle $\varnothing 1/2"$



1040TPSM12

Stainless steel hinge axle M12

Stainless steel hinge axle M12. Available in 2 versions: 5-1/8" or 5-15/16".



SPECIFICATIONS

- Stainless steel hangerbolt M12

ORDER CODES

Hangerbolt length

1040TPS-M12-130

1040TPS-M12-150

A

B

C

M12 Length 5-1/8" 4-5/16"


M12 Length 5-15/16" 5-1/8"



1040HDSM16

Hot-dip galvanized hinge axle M16

Hot-dip galvanized hinge axle M16. Compatible with hinge plug DURA-4040-16 and DURA-5050-16.



SPECIFICATIONS

- Hot-dip galvanized hangerbolt M16

ORDER CODES

Hangerbolt length

1040HDS-M16-160

1040HDS-M16-180

A

B

C

M16 Length 6-5/16" 5-5/16"


M16 Length 7-1/16" 6-1/8"



DURA (Patented)

Aluminum reinforced post plug for hinges

Hinge plug reinforced with aluminum for extra stability



SPECIFICATIONS

- Aluminum reinforced hinge plug

ORDER CODES

For 1040-TPS-M12

DURA-4040-12

For 1040-HDS-M16

DURA-4040-16

DURA-5050-16

A

B

C

D

1-1/4" 1-9/16" $\varnothing 7/16"$ - $\varnothing 9/16"$ 1-9/16"

1-7/8" 2" $\varnothing 9/16"$ 2"

4DW (Patented)

Vandal-proof 4D-hinge for wooden gates




Aesthetic, vandal proof hinge for wooden gates. The stainless steel hinge can be adjusted in 4 dimensions. Height, depth, left / right alignment and rotational direction can be adjusted. Adjustments can be made after installing the hinges. This way your gate is always perfectly aligned.

24h
SHIPPING

SPECIFICATIONS

- 180° hinge for wooden gates
- Adjustable in 4 dimensions: height, depth, left / right alignment and rotational direction
- ± 2" longitudinal adjustability
- 3/4" depth adjustability (9/16" outside and 15/64" inside of fixed pole)
- Vandal and tamper proof
- Available with 1 ft 3-3/4 inch or 1 ft 7-11/16 inch hinge arm
- Perfect in combination with the H-Wood lock and SHKW keep

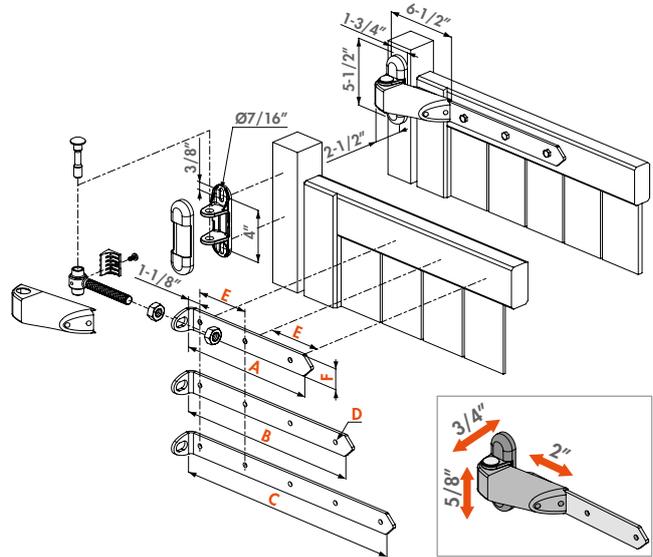

ORDER CODES

Hinge arm in stainless steel	LBS	A	B	C	D	E	F
4DW-300-A2	330 lbs	Length 11-13/16"			Ø3/8"	4-5/16"	1-1/2"
4DW-400-A2	330 lbs	Length 15-3/4"			Ø3/8"	4-5/16"	1-1/2"
4DW-500-A2	330 lbs			Length 19-11/16"	Ø3/8"	4-5/16"	1-1/2"

3DW (Patented)

180° 3-way adjustable strap hinge



24h
SHIPPING


Stainless steel strap hinge for wooden gates. The hinge is adjustable in three dimensions; height, left/right alignment and swing direction. This hinge is available with a stainless steel or hot-dip galvanized arm in two sizes.

COLOR OPTIONS

SILV 9005

SPECIFICATIONS

- 180° hinge for wooden gates
- Reversible for left or right hand swing gates
- Vandal and tamper proof
- Hinge socket, axle and socket cover plate in stainless steel

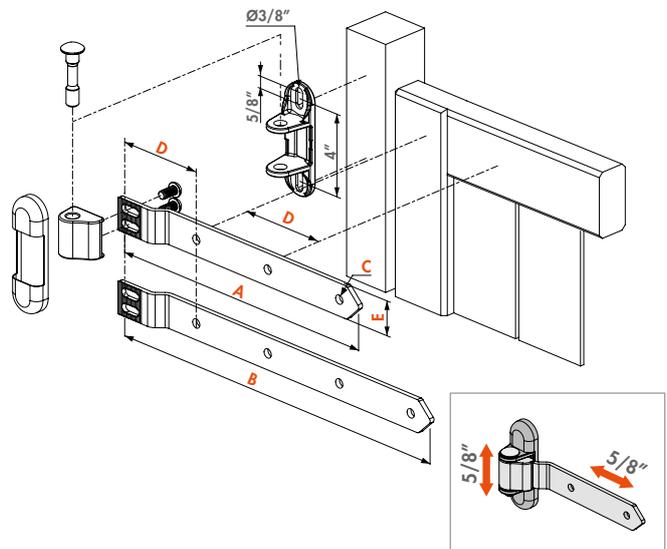

ORDER CODES

Hinge arm in stainless steel	Hinge arm in hot-dip galvanized steel	LBS	A	B	C	D	E
3DW-350-A2	3DW-350-HDG	770 lbs	Length 13-3/4"		Ø7/16"	4-5/16"	1-1/2"
	3DW-450-HDG	770 lbs		Length 17-3/4"	Ø7/16"	4-5/16"	1-1/2"



DROP BOLTS &
GROUND CATCHERS

Dropbolts & ground catchers

The Locinox range of drop bolts and ground stops offers a wide array of solutions. From the economical VSF drop bolt to the internal SUBY or motorized ELECTRADROP, designed for ease of use and aesthetics. For every situation, there is a reliable solution that combines functionality and style.



DROP BOLTS &
GROUND CATCHERS



ELECTRADROP (Patent pending)

Electrical drop bolt

Electric 24V drop bolt with 4-1/2" throw for safe locking of automated swing gates. By securing your gate with an Electradrop you disburden the electric gate motors.

24h
SHIPPING



STAINLESS
STEEL



COLOR OPTIONS



SPECIFICATIONS

- Vandal-proof, anodized aluminium housing
- To be connected to the warning light on automated gates (min 3 sec prewarning signal) or directly on the gate automation
- Mechanical release possible (by key) in case of emergency
- The integrated obstacle detection will automatically stop the drop bolt movement in case of overpressure to avoid injuries.
- Power consumption: Normal: 25 W / Peak: 72W / Standby: 0,2 W
- 16-1/2 ft cable included
- Included: 3012-37-STD-VSZ cylinder
- To connect to a Locinox PowerStone-24V-60W power supply
- IP66

ORDER CODE

ELECTRADROP-E	Motorized electrical drop bolt with Fail Close functionality 24h SHIPPING
ELECTRADROP-E-P	Motorized electrical drop bolt with bolt position detection and Fail Close functionality 24h SHIPPING
ELECTRADROP-R	Motorized electrical drop bolt with integrated emergency batteries 24h SHIPPING
ELECTRADROP-R-P	Motorized electrical drop bolt with bolt position detection and integrated emergency batteries 24h SHIPPING

COMPATIBLE PRODUCTS




OGS
P. 168



SABO
P. 168



POWERSTONE
P. 60

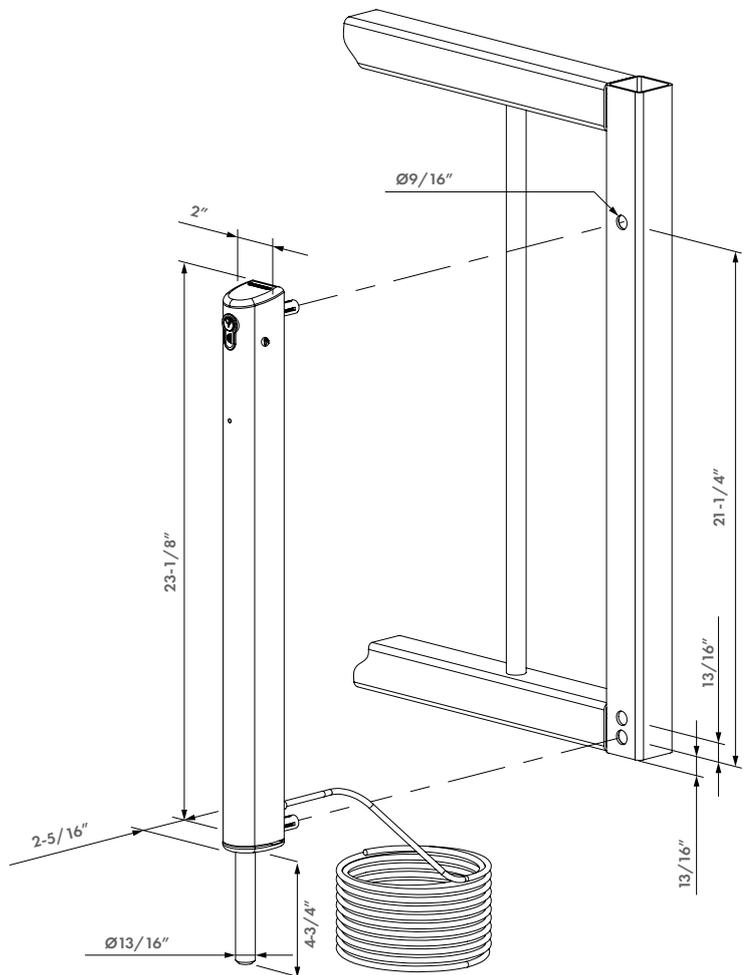

DROP BOLTS &
GROUND CATCHERS



24h
SHIPPING



STAINLESS
STEEL



KEYDROP (Patented)

Key Lockable drop bolt


Key lockable drop bolt. It is surface mounted for easy access and installation. It can be keyed to match the gate lock on the facing leaf. The KEYDROP enables you to lock the drop bolt in open or closed position. It is installed with our Quick-Fix mounting hardware and is interchangeable with our standard VSF and VSA drop bolts.

COLOR OPTIONS



SPECIFICATIONS

- Throw: 5-1/2"
- Lockable drop bolt with cylinder
- Same drilling pattern as VSF and VSA
- Possible to match same key as gate lock
- Height adjustability of the drop bolt: 4"
- Height adjustability in 3 positions: 2" / position
- The gate can be locked in open or closed position
- For gate profiles 1-1/2" sq or larger

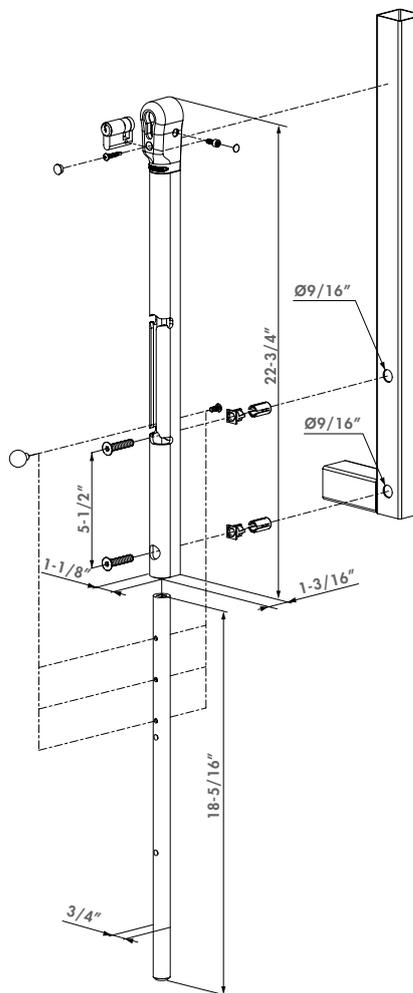

ORDER CODE

KEYDROP For profiles 1-1/2" x 1-1/2" or more **24h** SHIPPING

COMPATIBLE GROUND STOP



OGS
P. 168



SABO
P. 168



EGS
P. 167

DROP BOLTS & GROUND CATCHERS

SUBY (Patented)

Internal drop bolt

Internal aluminum drop bolt. An aesthetical solution for double leaf gates, the drop bolt disappears from view. The drop bolt is conveniently operated at waist height and if the handle is installed between the gate leaves, it becomes self-locking. It fits inside 1-1/2" to 2-1/2" square tubing.




COLOR OPTIONS



SPECIFICATIONS

- Height adjustability of the drop bolt: 4"
- Internal drop bolt in aluminum
- Throw: 4-3/4"
- Steel handle with black plastic coating (polyamide) provides the optimal combination between robustness, ergonomics and protection against corrosion
- Internal push spring guarantees a perfect closure (even if the drop bolt is blocked by dirt inside the ground stop) and prevents overpressure
- Fast & easy mounting: 2 screws
- User-friendly manipulation of the drop bolt at a convenient height
- For square gate profiles: 1-1/2", 2", or 2-1/2" and for rectangular gate profiles: 2-3/8" x 1-1/2"
- For profiles of 1-1/2", 2" and 2-1/2": max. wall thickness of 5/64"
- For profiles of 2-3/8" x 1-1/2": wall thickness up to 1/8"

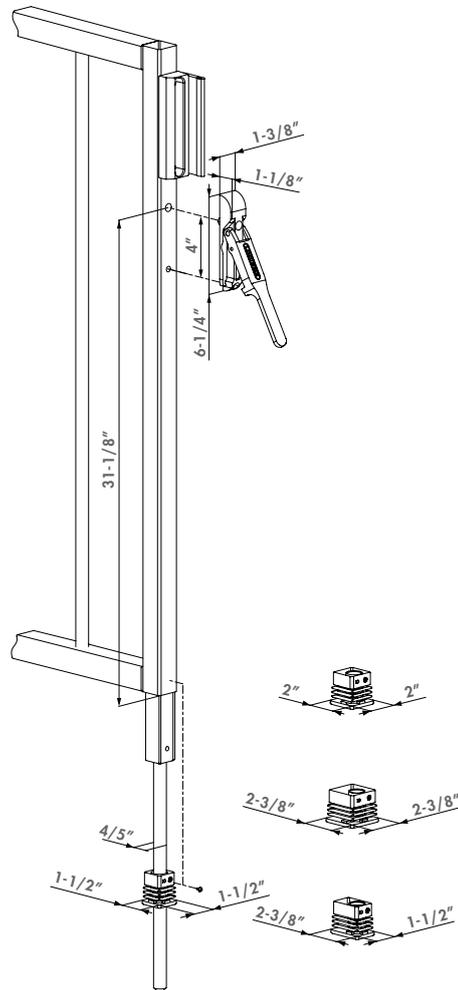

ORDER CODE

SUBY For gate profiles 1-1/2" x 1-1/2", 2" x 2", 2-1/2" x 2-1/2" and 2-1/2" x 1-1/2"

COMPATIBLE GROUND STOP



CGS
P. 167



EGS
P. 167

EGS

Economic ground catch for drop bolt


Economic ground catch/drop bolt receiver for drop bolts with maximum bolt of 3/4". With draining hole.



24h
SHIPPING

SPECIFICATIONS

- Simple and economic In-ground catch designed to put in concrete
- Without stop plate
- Hot-dip galvanized base-plate with polypropylene catcher
- For drop bolts with a maximum bolt diameter of 3/4"

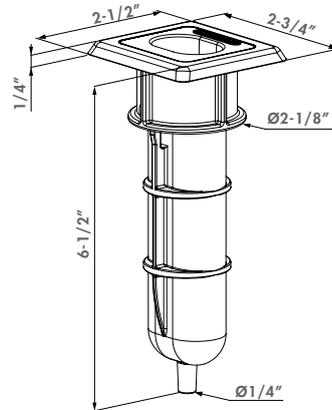

COMPATIBLE DROP BOLTS



SUBY
P. 166



KEYDROP
P. 165



VSA / VSF
P. 164



ELECTRADROP
P. 163

ORDER CODE

EGS Economic ground stop, without stop plate **24h** SHIPPING

CGS

Centered ground stop and catch


Strong ground stop and receiver for double leaf gates. It is recommended to be used in combination with the internal drop bolt SUBY. "Centered" refers to the positioning of the receiving ground pot, which is "centered" under the gate leaf when the gate is closed. The CGS has a removable receiver for easy and fast cleaning of the ground pot.



24h
SHIPPING

SPECIFICATIONS

- Glass Fibre reinforced Polypropylene base with anodised aluminum bumper
- Only suitable with internal SUBY drop bolts
- Adjustable stop plate for 1-1/2" to 2-1/2" gate frames
- Removable polyamide cleaning recipient
- With water drain hose

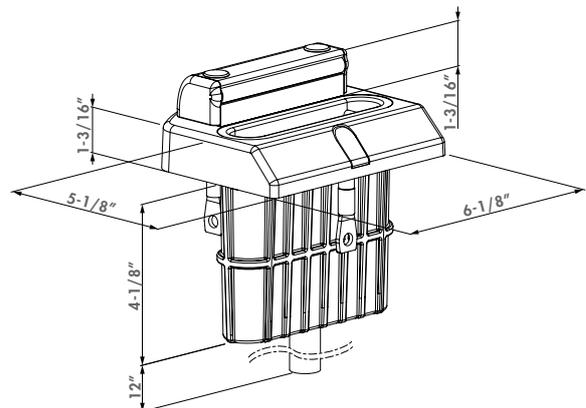

COMPATIBLE DROP BOLT



SUBY
P. 166

ORDER CODE

CGS Adjustable stop plate for 1-1/2" to 2-1/2" gate frames **24h** SHIPPING

SABO

Bolt-on off-centered ground stop


Strong surface mounted aluminium ground stop for double wing gates. Drop bolts with a maximum axle of $\varnothing 13/16"$ are the perfect fit.



24h
SHIPPING

SPECIFICATIONS

- Surface mounted design, suitable for surface mounted drop bolts
- Maximum drop bolt axle diameter: $\varnothing 13/16"$
- Adjustable in height: distance between finished ground level & bottom of the gate: $13/16"$ to $1-3/4"$
- Adjustable in depth, different gate profiles possible: VSA - VSF - Keydrop: $1-9/16"$ to $2-3/8"$; Electradrop: $1-9/16"$ to $2"$
- Anchor pins included
- Material: black anodized aluminum top plate

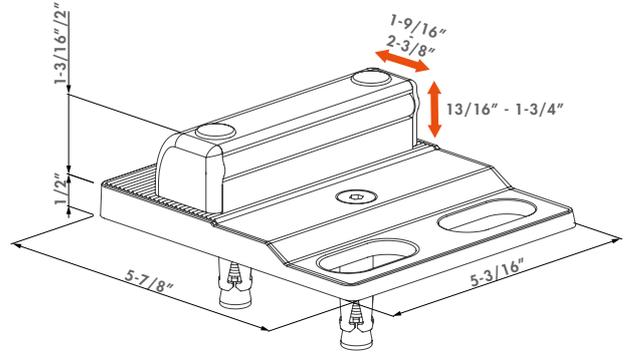

COMPATIBLE DROP BOLTS



ELECTRADROP
P. 163



KEYDROP
P. 165



VSA / VSF
P. 164

ORDER CODE

SABO Bolt-on off-centered ground stop **24h** SHIPPING

OGS

Off-centered ground stop and catch


Strong ground stop for double gates. Recommended in combination with the external dropbolts VSF/VSA and Keydrop. The OGS has a removable tray for easy and fast cleaning of the ground catch.



24h
SHIPPING

SPECIFICATIONS

- Glass Fibre reinforced Polypropylene
- Suitable for surface mounted drop bolts (VSF - VSA - Electradrop - Keydrop)
- Adjustable stop plate for $1-1/2"$ to $2-1/2"$ gate frames
- Removable polyamide cleaning recipient
- With water drain hose

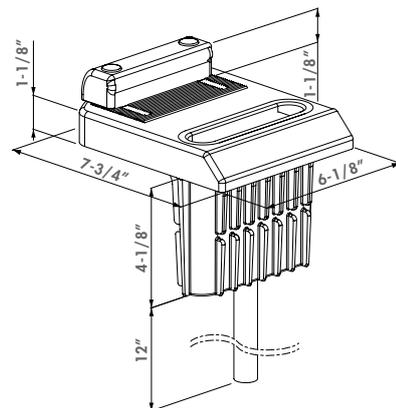

COMPATIBLE DROP BOLTS



ELECTRADROP
P. 163



KEYDROP
P. 165



VSA / VSF
P. 164

ORDER CODE

OGS Adjustable stop plate for $1-1/2"$ to $2-1/2"$ gate frames **24h** SHIPPING



DROP BOLTS &
GROUND CATCHERS



GATE CATCHERS

Gate catchers

Gate catchers hold your gate open without inflicting any damage. They are adjustable in height to fit your gate and the used profiles. The gate catchers are made of aluminum or hot-dip galvanized steel.




ABK

Gate hold-back catch hot-dip galvanized

Galvanized steel gate hold back. The adjustable catch reaches through the gate and is designed to catch a horizontal profile. It is to be set into concrete for a secure installation. For gate profiles up to 2".

SPECIFICATIONS

- Hot-dip galvanized U-profile in steel
- Catch hook in aluminum
- Height adjustability: 2-1/16"

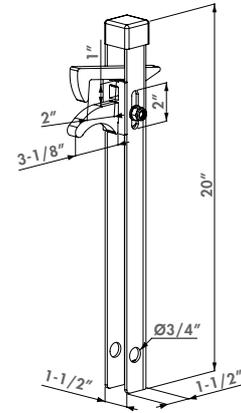

ALTERNATIVE GATE CATCHERS



UNDER-GATE CATCHER
P. 173



IN-GATE CATCHER
P. 173

ORDER CODE

ABK For gate profiles with a max. width of 2"



ABL


Gate hold-back catch hot-dip galvanized

Galvanized steel gate hold back. The adjustable catch reaches through the gate over the bottom rail. It is designed to be set into concrete. The catch hook is 2" adjustable in height. For gate profiles up to 2".

**24h
SHIPPING**

SPECIFICATIONS

- Hot-dip galvanized U-profile in steel
- Stainless steel bolt
- Catch hook in aluminum
- Height adjustability: 2-1/16"

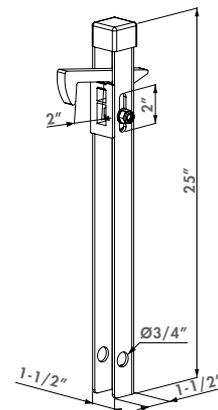

ALTERNATIVE GATE CATCHERS



UNDER-GATE CATCHER
P. 173



IN-GATE CATCHER
P. 173

ORDER CODE

ABL For gate profiles with a max. width of 2" **24h
SHIPPING**



24h
SHIPPING


UNDER-GATE CATCHER

Gate hold-back catch in aluminum

Aluminum gate hold back. The adjustable catch reaches under the gate catching the bottom rail and the hook can easily be reversed. The rubber stop and polyamide catch hook avoid damaging the gate frame. Very fast and strong installation in concrete. For gate profiles from 1-1/2" to 2-1/2". Simple height adjustment of 1-1/2".

SPECIFICATIONS

- Aluminum powder coated chassis
- Anchoring holes to put in concrete
- Height adjustability of the catch hook: 1-1/2"
- Rubber stop and polyamide catch hook avoid damaging the gate frame
- Rubber stop adjustable for profiles 1-1/2" to 2-1/2" gate frames
- Reversible catch hook: pre-mounted with hook up
- Catches bottom side of the gate

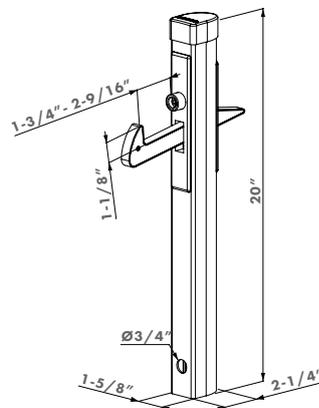

ORDER CODE

UNDER-GATE CATCHER Under Gate Catch for 1-1/2" to 2-1/2" **24h** SHIPPING



24h
SHIPPING


IN-GATE CATCHER

Gate hold-back catch in aluminum

Aluminum gate hold back. The adjustable catch reaches through the gate over the bottom rail and the hook can easily be reversed. The rubber stop and polyamide catch hook avoid damaging the gate frame. Very fast and strong installation in concrete. For gate profiles from 1-1/2" to 2-1/2". Simple height adjustment of 1-1/2".

SPECIFICATIONS

- Aluminum powder coated chassis
- Anchoring holes to put in concrete
- Height adjustability of the catch hook: 1-1/2"
- Rubber stop and polyamide catch hook avoid damaging the gate frame
- Rubber stop adjustable for profiles 1-1/2" to 2-1/2" gate frames
- Reversible catch hook: pre-mounted with hook down
- Catches upper side of the gate

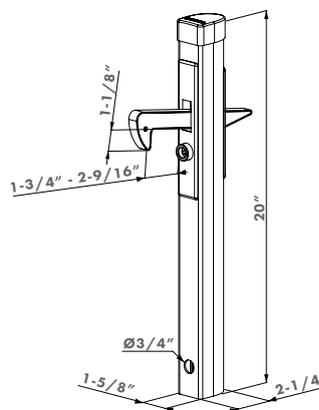

ORDER CODE

IN-GATE CATCHER In-Gate catch for 1-1/2" to 2-1/2" **24h** SHIPPING



UP

HANDLE POSITION

Ø 3/8 in
Ø 9.5 mm

LOCINOX

BOTTOM LOCK

TOOLS



Tools

Locinox guarantees a quick, qualitative and perfect installation thanks to the in-house developed jigs.



MULTITOOL

Multifunctional tool

7-in-1 multifunctional tool for Locinox products. There are seven essential functions, including two screwdrivers (PH1 and PH2), a flathead screwdriver (1.0mm x 5mm) and an assortment of four hex keys (HEX3, HEX4, HEX5, HEX6).

SPECIFICATIONS

- Steel tools
- 3.54" x 1.38" x 0.59"
- Available in RAL9005

ORDER CODE

MULTITOOL



24h
SHIPPING


3970LA

Drilling jig for swing gate locks

Drilling jig to prepare the gate-/strike-post for LA- / LE- / LM-locks and according keeps (SA / SH / SM). The jig can be adjusted for profiles 1" / 1-1/4" / 1-1/2" / 1-3/4" / 2" / 2-1/2". The jig guarantees a perfect center alignment of the lock/keep on your posts.

SPECIFICATIONS

- Drilling jig for surface mounted swing gate locks and its keeps
- Adjustable for profiles from 1-1/2" - 2" - 2-1/2"

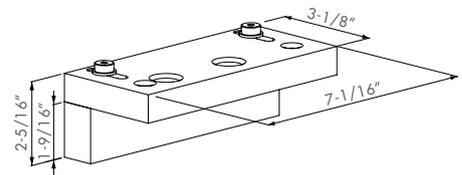

ORDER CODE

3970LA

For swing gate locks




3970LS

Drilling jig (Special Order Only)

Drilling jig to prepare the gate- and strike-post for sliding gate locks and according keeps. The jig can be adjusted for profiles 1-1/2" - 2" - 2-3/8" or 2-3/8" - 3-1/8" according to jig version. The jig guarantees a perfect center alignment of the lock/keep on your posts.

SPECIFICATIONS

- Drilling jig for: LS- & LL-locks and SSKZ/SSKO keeps
- Available in two versions: for profiles: 1-1/2" - 2" - 2-3/8" or 2-3/8" - 3-1/8"

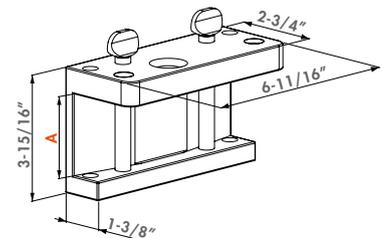

ORDER CODES

3970LS-4060

For sliding gate locks 1-9/16" - 2" - 2-3/8"

3970LS-6080

For sliding gate locks 2-3/8" - 3-1/8"



24h
SHIPPING


DRILL HSS 15

Drilling bit Ø15 mm (5/8") with drill-chuck Ø13 mm (1/2")

HSS drill with Ø15 mm (5/8") and drill-chuck Ø13 mm (1/2"). Fits any hand drilling machine.

SPECIFICATIONS

- Drilling bit Ø9/16" with drill-chuck Ø1/2"
- For preparation of your profiles
- For use with the drilling jig 3970LA

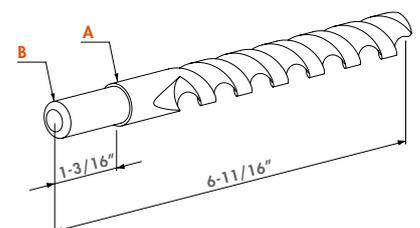

ORDER CODE

DRILLØ15

A **B**
Ø9/16" Ø1/2"



24h
SHIPPING


DRILLFIX

Tool case with drilling jig for surface mounted locks and corresponding keeps

Quickly and accurately install Locinox locks and keeps with our brand new Drill-Fix jig. This jig is designed to self-center on square or round posts, and guarantees perfect alignment. This will allow you to easily drill the 4 hole pattern for the lock or the two holes necessary for the keep. Seamless installs in a flash. The Drill-Fix comes in a sleek and sturdy case that includes all the necessary accessories to install Locinox locks and keeps.

SPECIFICATIONS

- Tool case with self-centering drilling tool for fast assembly of Locinox surface mounted gate locks and keeps
- Drill jig can be used for round, square or rectangular profiles from 30 up to 76mm (1-1/4" up to 3")
- Includes 3 drill bits (Ø9,5 mm, Ø15 mm, Ø18 mm)
- Useful for installation of Locinox bolt-on locks and keeps in 4 easy steps
- Includes LA Locitool
- Includes Allen Key and positioning pin

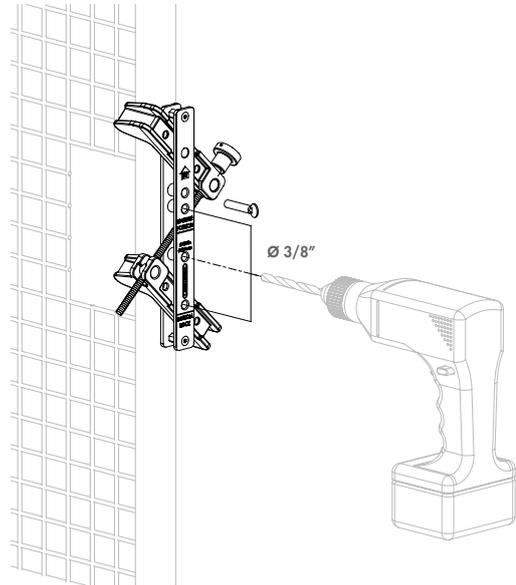

ORDER CODE

DRILLFIX Tool case with drilling jig for lock and keep **24h** SHIPPING



24h
SHIPPING


LION-VTC-DRILL

Assembly and drill jig for Lion and Verticlose-2 gate closers

Toolbox with the required tools to install both Lion and Verticlose-2 gate closers very quickly and efficiently. The Lion-VTC Drill guarantees a flawless alignment of the gate closer in relation to the gate. No more measuring - just fix, drill, install and ready. Highly recommended.

SPECIFICATIONS

- Sturdy case with compartments
- Spare set with 10 Quick-Fix expanders
- Includes 2 drill bits Ø13/64" and Ø5/8"

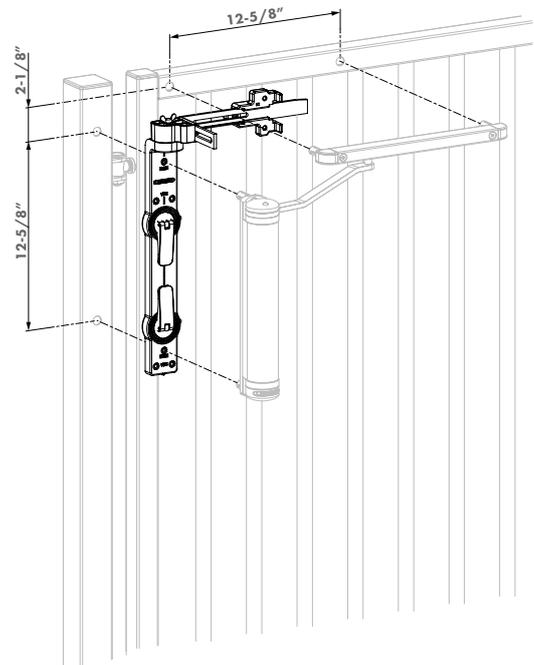

ORDER CODE

LION-VTC-DRILL Installation and drilling jig for Lion & VTC-2 gate closers **24h** SHIPPING



24h
SHIPPING

SPECIFICATIONS

- Includes 2 drill bits $\text{\O}13/64''$ and $\text{\O}5/8''$
- Spare set with 10 Quick-Fix expanders
- Solid plastic box with compartments for convenient storage
- Includes accessories for assembly and adjustment of Tiger
- Recommended to be combined with Drillvise-IV


ORDER CODE

TIGERDRILL Installation and drilling jig for Tiger gate closer **24h** SHIPPING

TIGERDRILL

Installation and Drilling jig for Tiger gate closer

Tool case with installation and drilling jig to perfectly align and install the Tiger gate closer and its Puma hinge. This tool guarantees perfect alignment and a fast and easy installation. No measuring needed, just fix the tool on the post, drill the holes, install the Tiger and Puma, and close the gate.

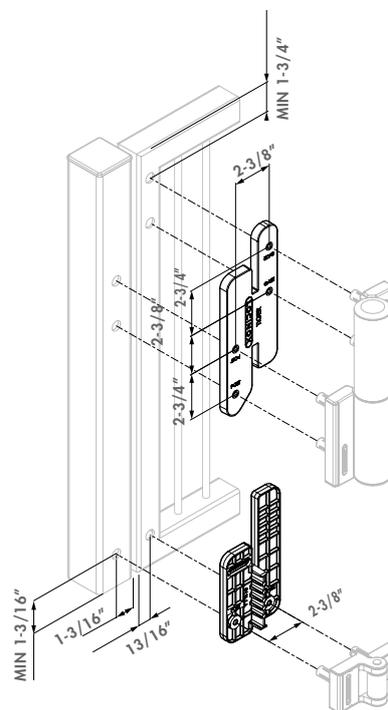

24h
SHIPPING

SPECIFICATIONS

- Includes 2 drill bits $\text{\O}13/64''$ and $\text{\O}5/8''$
- Spare set with 10 Quick-Fix expanders
- Solid plastic box with compartments for convenient storage
- Positions Rhino perfectly with regards to the Locinox hinge
- Includes accessories for assembly and adjustment of Rhino


ORDER CODE

RHINODRILL Assembly and drill calibre for Rhino gate closer **24h** SHIPPING

RHINODRILL

Installation and Drilling jig for Rhino gate closer

Tool case with installation and drilling jig to perfectly align and install the Rhino gate closer on the existing hinges. This tool guarantees perfect alignment, fast and easy installation. There is no more measuring needed, just fix the tool on the post, drill the holes, install the Rhino and close the gate.

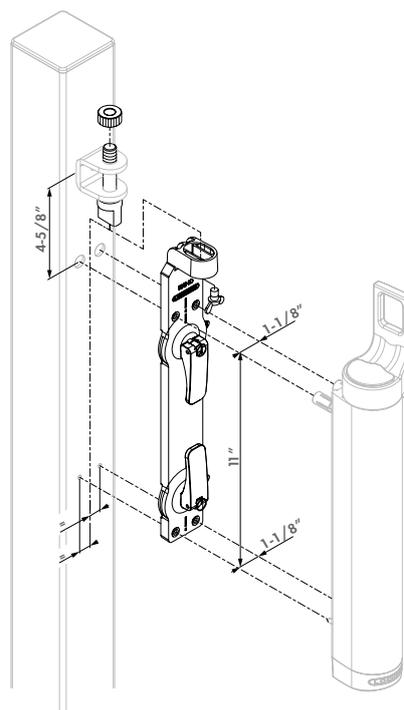



Quick-Fix

The unique Quick-Fix fastening system guarantees an extremely secure fixing on all your gates and fences. As a unique patented solution, Quick-Fix ensures an assembly which is twice as quickly.

QUICK ASSEMBLY

Quick-Fix is pre-assembled on the product. You win valuable time on site, which allows you to be quicker with your next customer. You only need to drill the required 9/16" holes, place the product on the holes, fix and ready!

FIRM ANCHORING

With its 2,000 lbs tensile strength a firm anchoring is always guaranteed. Quick-Fix is available for profiles with a wall thickness from 1/16" to 3/16" or from 3/16" up to 5/16".

CORROSION FREE

Locinox relies upon the best materials. This also applies to Quick-Fix which is 100% made of premium stainless steel. Quick-Fix easily passes the 500h salt spray test.




24h
SHIPPING

QUICK-FIX (Patented)

Stainless steel fixation bolt with high pulling resistance

Quick-Fix guarantees an easy, fast and highly robust mounting. The new generation of the Quick-Fix can be reused completely many times thanks to its innovative design.

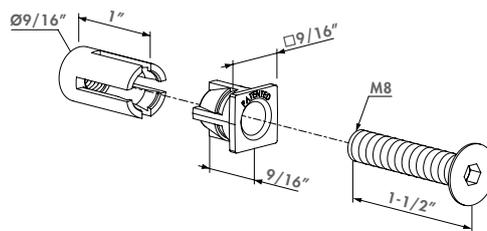

SPECIFICATIONS

- Patented mounting system out of stainless steel
- Very strong: 2000 lbs pulling resistance
- Innovative design which guarantees reuse of the Quick-Fix
- Available in two versions, for profiles with thickness till 3/16" and for profiles with thickness till 5/16"

ORDER CODE

QUICK-FIX

Patented mounting system




24h
SHIPPING

WALL-FIX

Wall fixation set for keeps

The Wall-Fix ensures a firm anchoring of most Locinox keeps in (brick) walls. The components of this fixation set are made out of steel.

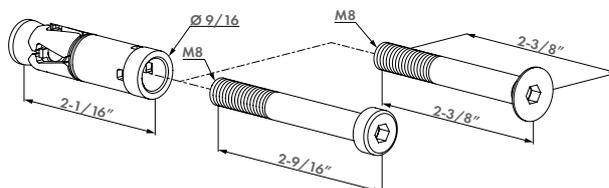

SPECIFICATIONS

- For a solid anchoring of keeps in walls
- Can be used for SAKL, SHKL, SMKL, SFKB, SFKP and all Modulec - keeps
- Consists out of 2 expansion anchors with matching bolts

ORDER CODE

WALL-FIX

Wall fixation set for keeps






Accessories

Modularity, compatibility and flexibility within our product range give you an endless amount of solutions. Build your own product to fit your production processes and product range. Locinox makes sure your orders are handled quickly and correctly.

A buyer's guide to the shroud

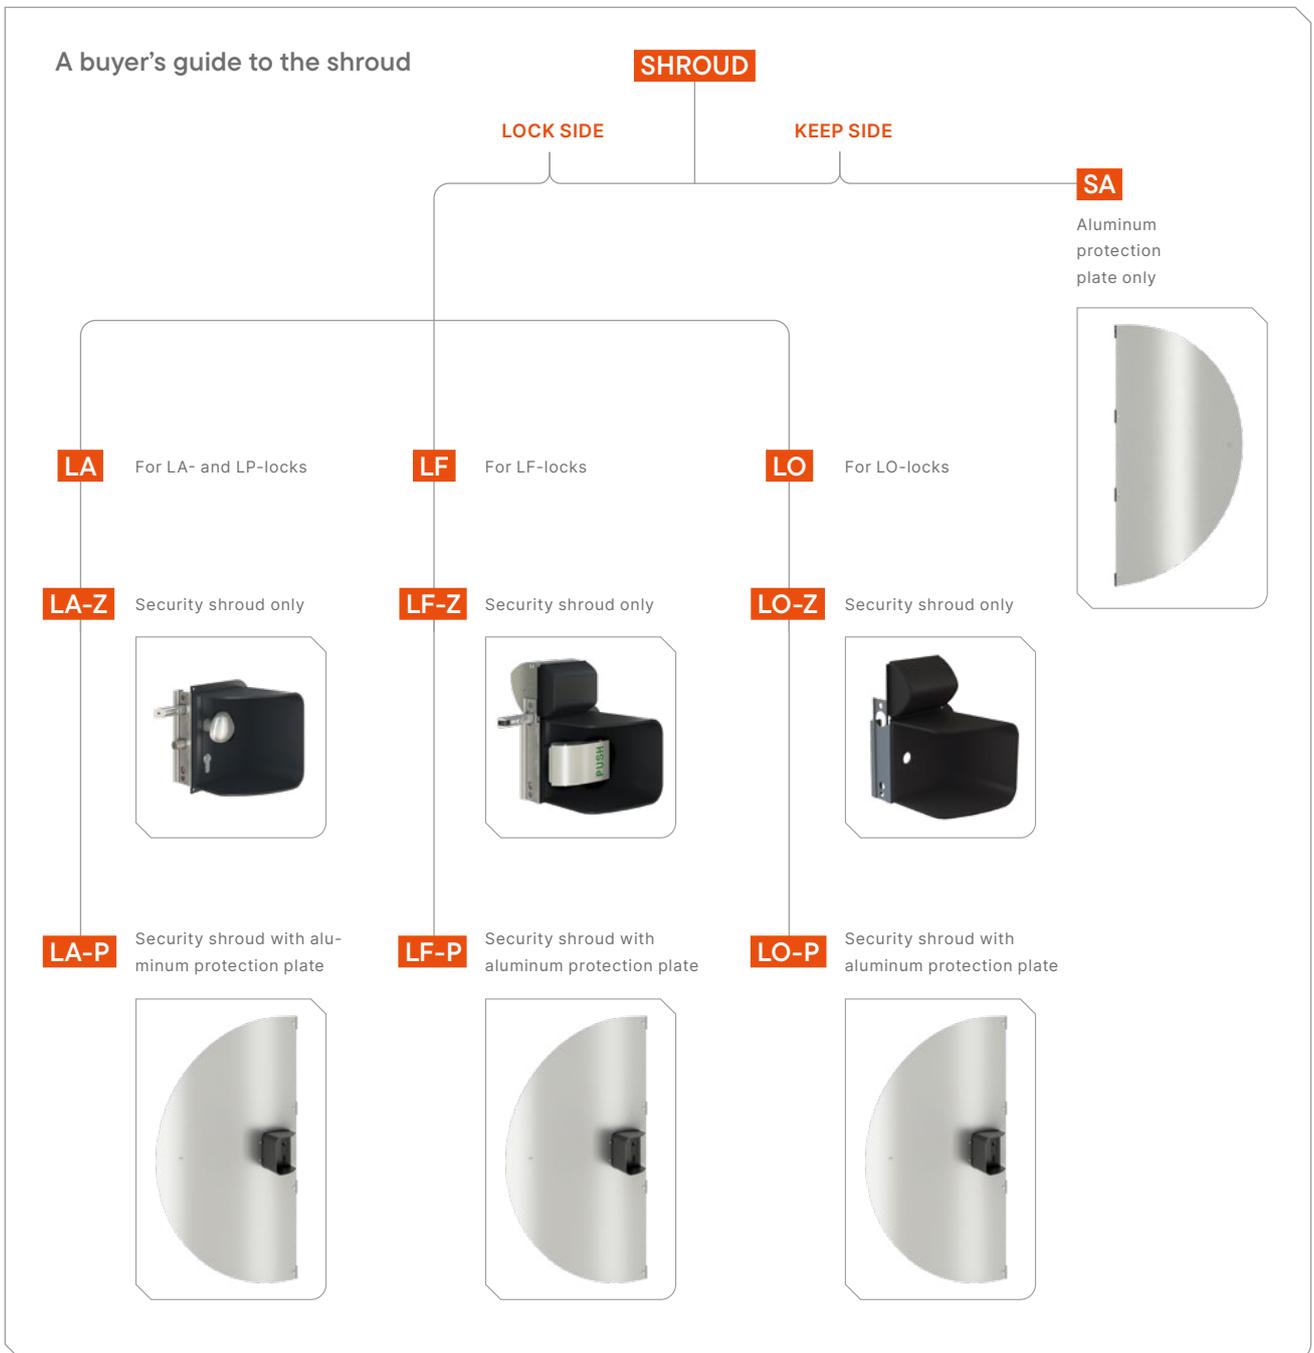

24h
SHIPPING

SHROUD-SA

Protection plate to avoid access to the handle from the outside


Moon shape aluminium protection plate restricting access from the outside of the gate, on the keep side, to the handles.

SPECIFICATIONS

- Uncoated aluminium shield plate
- To be installed on the keeper side of the gate
- Perfect shielding on gate and post side when installed together with SHROUD-LA-P / LF-P
- Easy installation and security guaranteed
- For gate profiles of 1-1/2" up to 2-1/2"

ORDER CODE

SHROUD-SA Protection plate to avoid access to the handle from the outside **24h** SHIPPING

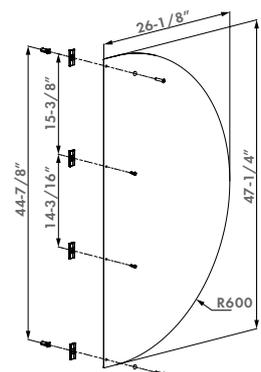




24h
SHIPPING

SHROUD-LA

Security shroud for surface mounted locks with free exit configuration

This shroud restricts access to the handle from outside the gate.



SPECIFICATIONS

- Compatible with free exit type configs of single Europrofile cylinder locks (LP, LA, ...)
- Compatible with 3006R-2, KIDLOC-2, 3006KR and 3006PUSH door handles only
- Easy installation and security guaranteed
- Available with (-P) or without (-Z) untreated aluminum shield plate (half-moon shape)
- For gate profiles of 1-1/2" up to 2-1/2"

ORDER CODES

SHROUD-LA-P	Security shroud for surface mounted locks with free exit configuration, with untreated aluminum shield plate 24h SHIPPING
SHROUD-LA-Z	Security shroud for surface mounted locks with free exit configuration, without untreated aluminum shield plate 24h SHIPPING

COMPATIBLE HANDLES



3006R-2
P. 188

3006KR
P. 184

3006PUSH
P. 186




24h
SHIPPING

SHROUD-LF

Security shroud for free exit mechanical code lock

This shroud restricts access to the handle from outside the gate.



SPECIFICATIONS

- Shroud made out of polyamide with black matte finish
- Compatible with Free Vinci mechanical code lock
- Compatible with 3006C-2, 3006R-2 and 3006-PUSH handles only
- Easy installation and security guaranteed
- Available with (-P) or without (-Z) untreated aluminum shield plate (half-moon shape)
- For gate profiles of 1-1/2" up to 2-1/2"

ORDER CODES

SHROUD-LF-P	Security shroud for free exit mechanical code lock, with untreated aluminum shield plate 24h SHIPPING
SHROUD-LF-Z	Security shroud for free exit mechanical code lock, without shield plate 24h SHIPPING

COMPATIBLE HANDLES



3006R-2
P. 188

3006PUSH
P. 186




24h
SHIPPING

SHROUD-LO (Patented)

Security shroud for free exit code lock

This shroud restricts access to the handle from outside the gate. Compatible with mechanical (Free Vinci) and electronic (Valentino) code lock.



SPECIFICATIONS

- Shroud made out of polyamide with black matte finish
- Compatible with electronic (Valentino) code lock
- Compatible with 3006C-2, 3006R-2 and 3006-PUSH handles only
- Easy installation and security guaranteed
- Available with (-P) or without (-Z) untreated aluminum shield plate (half-moon shape)
- For gate profiles of 1-1/2" up to 2-1/2"

ORDER CODES

SHROUD-LO-Z	Security shroud for free exit code lock, without untreated aluminum shield plate 24h SHIPPING
-------------	--

COMPATIBLE PRODUCTS



LOKQY2
P. 76

LFKQX1
P. 79




24h
SHIPPING

3006KR

Aluminum knob blocking set

Aluminium round knob set. The kit allows following combinations: one side fixed with one side operational, both sides fixed or one side blinded. The set is advised in combination with all aluminium lock boxes when access control is needed and highly recommended with electric strikes.

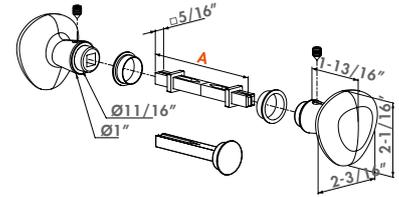

SPECIFICATIONS

- Highly recommended with Locinox electric strikes

ORDER CODE

3006KR

A

Follower length 3-9/16"



24h
SHIPPING

COLOR OPTIONS


ALUM

9005
24h
SHIPPING

3006FIX

Aluminum anodized handle pair with free exit and blocking option

The Anodized aluminum handle pair and cover shield offer the following options: both sides rotating, one side fixed/blocked or both sides fixed/blocked. The handle pair is compatible with Fortylock, Fiftylock, Sixtylock and Eightylock insert locks.

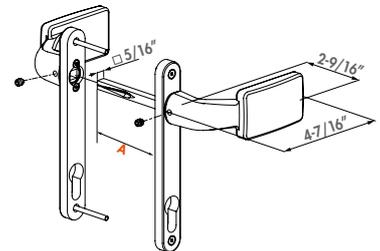

ORDER CODE

3006FIX

A

Follower length 4-3/4"



24h
SHIPPING

COLOR OPTIONS


ALUM

9005
24h
SHIPPING

3006PAD

Handle set with rounded corners in anodised aluminum with fixed and/or rotating functionality

Handle set with rounded corners in anodized aluminum. Following combinations are possible: both sides rotatable, one side rotatable and one side fixed or both sides fixed.



ORDER CODES

3006PAD

A

Follower length 4-3/4"



24h
SHIPPING

COLOR OPTIONS


ALUM

9005
24h
SHIPPING

3006HOLD

Handle set with rounded corners in anodized aluminum with fixed and rotating action

Handle set with rounded corners in anodized aluminum in two possible combinations: One side rotatable and one side fixed or both sides fixed.

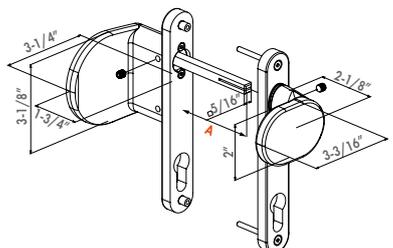

ORDER CODES

3006HOLD-PAD

A

Follower length 4-3/4"




24h
SHIPPING

KIDLOC (Patented)

Childproof security knob

Anodized aluminum and polyamide security knob providing child safety. At least one button must be pressed while turning the knob. Conform to the French standard for child safety at swimming pools NF P90-306.

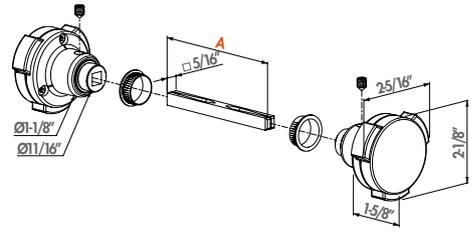

SPECIFICATIONS

- For all locks with a 8 mm shaft (appx 5/16")
- Anodized aluminum and polyamide
- Security knob for swimming pools, playgrounds, kennels,...
- Conforms to the European swimming pool standard NF P90-306

ORDER CODE

KIDLOC

A

Follower length 3-9/16"




24h
SHIPPING

3006PULL

Handle set 3006PULL

This aluminum powder coated handle set has an elegant design. This handle set could be used in combination with magnetic locks (e.g. if used top/bottom), or any gate that needs a sturdy and elegant pull handle independent of the latching mechanism.



COLOR OPTIONS



ORDER CODE

3006PULL

Fixation bolts not included




3006T11

Triangular spindle

SPECIFICATIONS

- Spindle in a triangular form of 7/16" to be used with triangle key
- Possible to insert in the handle opening of any LA lock



ORDER CODES

3006T11

27/64" triangular spindle




24h
SHIPPING

3006PUSH

Push handle set in aluminum

Aluminum Push handle set allows opening of the lock with a push movement in the same direction as the opening of the gate. The Push-set replaces the normal handle and the back side is blocked.

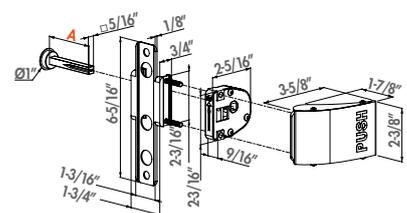

SPECIFICATIONS

- Compatible with all locks with a U-lock box and all surface mounted code locks for swing gates
- The 3006PUSH replaces the handles
- Facilitates the opening of the gate

ORDER CODE

3006PUSH

A

Follower length 2-3/8"



PUSHBAR-L

Push bar in aluminum for surface mounted gate locks

Panic Bar for an easy opening of a gate by a simple push. The aluminum PUSHBAR replaces the standard handle, operates the daybolt and can quickly be installed on new or existing Locinox surface mounted gate locks (LA, LP and LF chassis). The PUSHBAR is available in a long version for 5 ft. gates (55-1/8"). The push bar can however be perfectly shortened to fit any gate.


24h
SHIPPING

COLOR OPTIONS

9005
24h
SHIPPING

SPECIFICATIONS

- Black powder coated aluminum push bar with stainless steel mechanism
- For left and right turning gates
- Easy to install on the gate with Quick-Fix
- Blinded 5/16" follower included
- Possible to combine with half handle sets with 5/16" follower

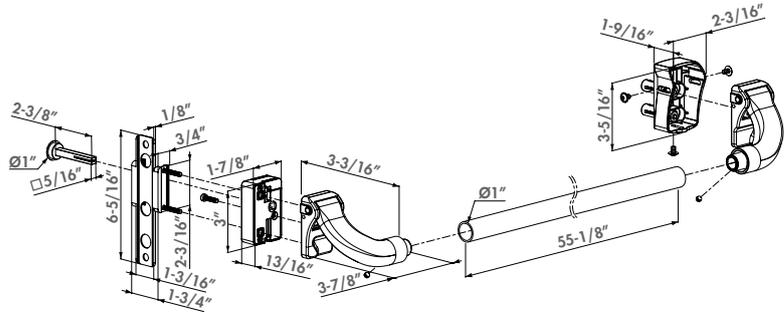

COMPATIBLE LOCKS



LAKQU2
P. 71

LPKQU2
P. 75

LFKQX1
P. 79

ORDER CODE

PUSHBAR-L-1400 Aluminum push bar for surface mounted locks - Length 55-1/8" **24h** SHIPPING



PUSHBAR-H

Aluminum push bar for insert locks

Panic bar for an easy opening and a free exit of a gate by a simple push. The aluminum PUSHBAR replaces the standard handle on the existing locks, operates the daybolt and can quickly be installed on new or existing Locinox hybrid insert locks. The PUSHBAR is available in a long version (55-1/8") for gates up to 5 ft. The push bar can however be perfectly shortened to fit any gate.


24h
SHIPPING

COLOR OPTIONS

9005
24h
SHIPPING

SPECIFICATIONS

- Black powder coated aluminum push bar with stainless steel mechanism
- Only compatible with H-Metal, H-Wood and Sixtylock
- Fast and easy attachment to square frames with Quick-Fix bolts
- For left and right turning gates
- Blinded 5/16" follower included
- Possible to combine with half handle sets with 5/16" follower

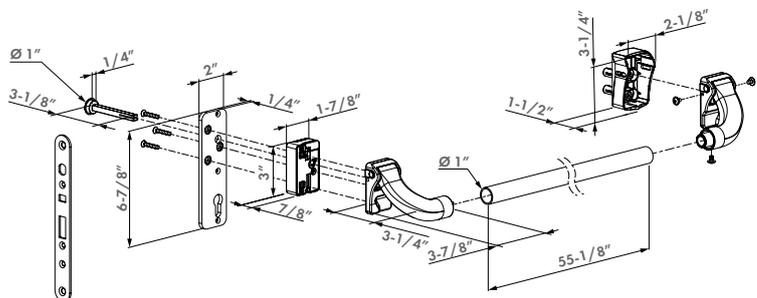

COMPATIBLE LOCKS



H-METAL
P. 103

H-WOOD
P. 107

SIXTYLOCK
P. 96

ORDER CODE

PUSHBAR-H-1400 Aluminum push bar for insert locks - Length 55-1/8" **24h** SHIPPING



24h
SHIPPING


3006A-2

Half anodized aluminum anti-panic handle

Half handle for LPKQ U2 anti-panic gate lock that guarantees a safe and quick exit.

SPECIFICATIONS

- Square 8 mm shaft (appx 5/16")
- Handle made of anodized aluminum
- EN 179 certified for use with the LPKQ U2 anti-panic gate lock

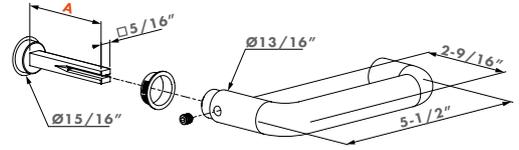

ORDER CODE

3006A-2

A

Follower length 2-3/8"



24h
SHIPPING


3006M-2

Modern half handle set in aluminum

Half aluminum modern handle - one side blocked

SPECIFICATIONS

- Square 8 mm shaft (appx 5/16")
- Half handle in aluminum

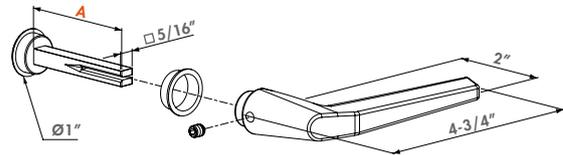

ORDER CODE

3006M-2

A

Follower length 2-3/8"



24h
SHIPPING


3006R-2

Half aluminum round handle

Half aluminum round handle. One side blinded.

SPECIFICATIONS

- Square 8 mm shaft (appx 5/16")
- Round knob in aluminum



ORDER CODE

3006R-2

A

Follower length 2-3/8"



24h
SHIPPING


KIDLOC-2

Childproof security knob half handle

Anodized aluminum and polyamide security knob providing child safety. At least one button must be pressed while turning the knob. Conform to the French standard for child safety at swimming pools NF P90-306.

SPECIFICATIONS

- Polyamide and aluminum



ORDER CODE

KIDLOC-2

A

Follower length 2-3/8"




NEW 3006C-2

Club half handle set in aluminum

Half aluminum club handle - one side blocked

SPECIFICATIONS

- Square 8 mm shaft (appx 5/16")
- Half handle in aluminum

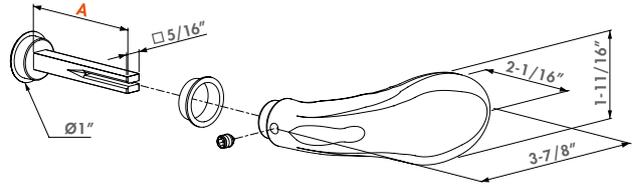

ORDER CODE

3006C-2

A
Follower length 2-3/8"




NEW 3006D-2

Design half handle set in aluminum

Half aluminum modern handle - one side blocked

SPECIFICATIONS

- Square 8 mm shaft (appx 5/16")
- Handle pair in anodized aluminum

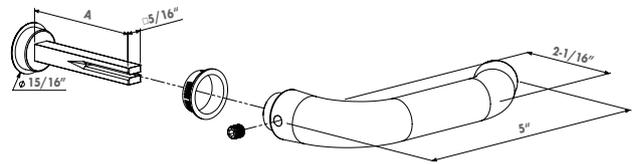

ORDER CODES

3006D-2

A
Follower length 2-3/8"




NEW 3006B-2

Black anodized aluminum handle pair

Black anodized aluminium half handle - one side blinded

SPECIFICATIONS

- Square 8 mm shaft (appx 5/16")

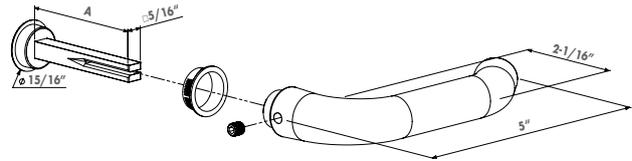

ORDER CODE

3006B-2

A
Follower length 2-3/8"



24h SHIPPING


3006C

Club handle pair in aluminum

Aluminum club handle pair

SPECIFICATIONS

- Square 8 mm shaft (appx 5/16")
- Handle pair in anodized aluminum

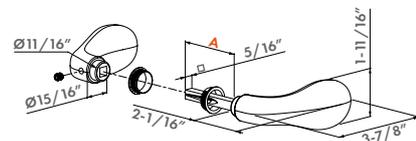

ORDER CODE

3006C

A
Follower length 2-3/8"



NEW

3006CB


Club handle pair in black aluminum

Aluminum club handle pair

24h
SHIPPING

SPECIFICATIONS

- Square 8 mm shaft (appx 5/16")
- Handle pair in anodized aluminum

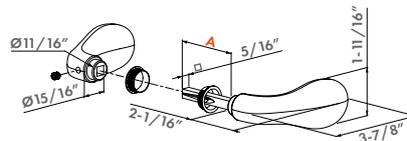

ORDER CODE

3006CB

A

Follower length 2-3/8"



24h
SHIPPING


3006J

Anodized aluminum handle pair

Aluminum handle pair

SPECIFICATIONS

- Special design avoids bumping of the hand against the stop plate
- Square 8 mm shaft (appx 5/16")

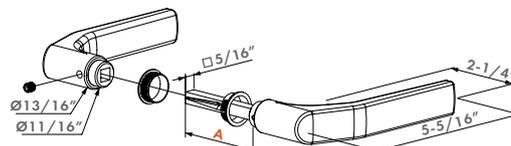

ORDER CODE

3006J

A

Follower length 2-9/16"



24h
SHIPPING


3006M

Modern handle pair in anodized aluminum

Aluminum modern handle pair

SPECIFICATIONS

- Square 8 mm shaft (appx 5/16")
- Handle pair in anodized aluminum

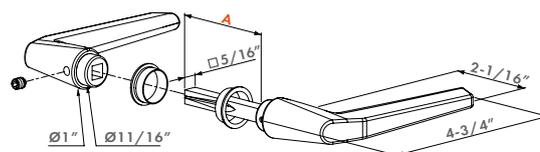

ORDER CODE

3006M

A

Follower length 2-3/8"



24h
SHIPPING


3006B

Black anodized aluminum handle pair

Black anodized aluminum handle pair

SPECIFICATIONS

- Square 8 mm shaft (appx 5/16")

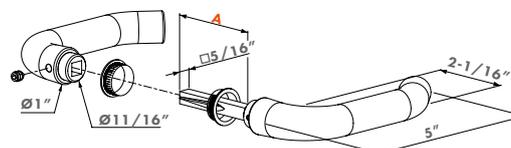

ORDER CODE

3006B

A

Follower length 2-3/8"



24h
SHIPPING


3006S

Reinforced aluminum handle pair

Handle pair, ideally combined with sliding gate locks.

SPECIFICATIONS

- Square 10 mm shaft (appx 5/16")
- Only applicable on LSKZ sliding gate lock

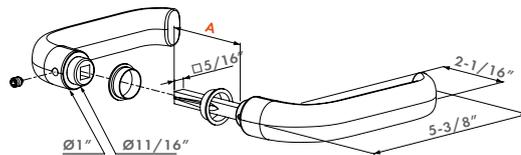

ORDER CODE

3006S

A

Follower length 2-3/8"



24h
SHIPPING


3006D

Aluminum handle pair

Aluminum handle pair.

SPECIFICATIONS

- Square 8 mm shaft (appx 5/16")
- Handle pair in anodized aluminum

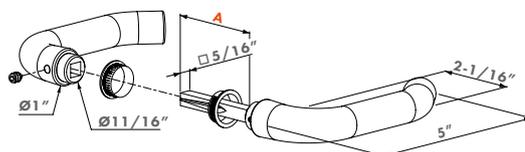

ORDER CODE

3006D

A

Follower length 2-3/8"



24h
SHIPPING


3006R

Round knob pair in aluminium

Aluminum round handle pair

SPECIFICATIONS

- Square 8 mm shaft (appx 5/16")
- Round knobs in aluminum

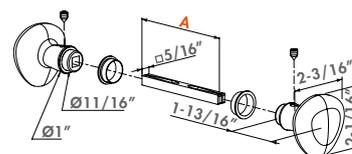

ORDER CODE

3006R

A

Follower length 3-9/16"



24h
SHIPPING

NEW


3006RB

Black round knob pair in aluminum

Black round knob pair in aluminum

SPECIFICATIONS

- Square 8 mm shaft (appx 5/16")
- Round knobs in aluminum

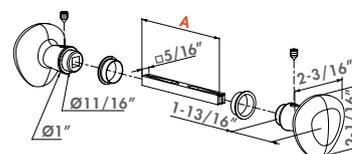

ORDER CODE

3006RB

A

Follower length 3-9/16"




3006I

Stainless steel handle pair

Stainless steel handle pair

SPECIFICATIONS

- Square 8 mm shaft (appx 5/16")
- Handle pair in stainless steel

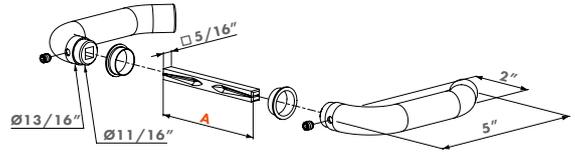

ORDER CODE

3006I

A

Follower length 3-9/16"




3006FA

Ornamental handle pair in zamac

Zamac ornamental handle pair

SPECIFICATIONS

- Square 8 mm shaft (appx 5/16")
- Handle pair in powder coated zamac

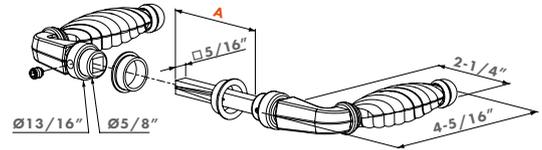

ORDER CODE

3006FA

A

Follower length 2-9/16"




3006G

Handle pair in polyamide

Handle pair in polyamide.

SPECIFICATIONS

- Special design avoids bumping of the hand against the stop plate

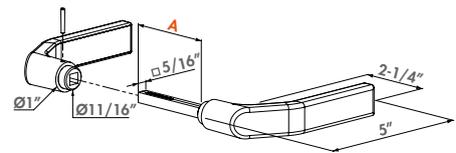

ORDER CODE

3006G

A

Follower length 2-5/8"




3006P

Garden handle pair in polyamide

Polyamide handle pair

SPECIFICATIONS

- Square 8 mm shaft (appx 5/16")
- Applicable with garden gate locks

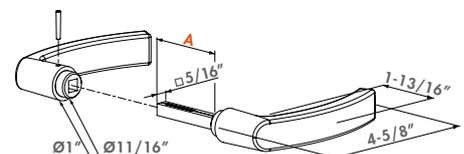

ORDER CODE

3006P

A

Follower length 2-1/8"




3006B-H

Black anodized aluminum handle pair for insert locks

Black anodized aluminum handle pair with 4-3/4" long spindle for use with insert locks

SPECIFICATIONS

- Square 8 mm shaft (appx 5/16")

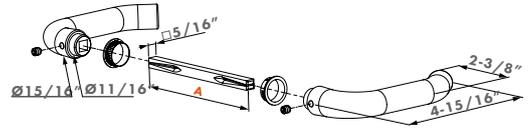

ORDER CODE

3006B-H

A

Follower length 4-3/4"




3006D-H

Anodized aluminum handle pair for insert locks

Handle set in anodized aluminum with 4-3/4" crank pin for use with insert locks

SPECIFICATIONS

- Square 8 mm shaft (appx 5/16")

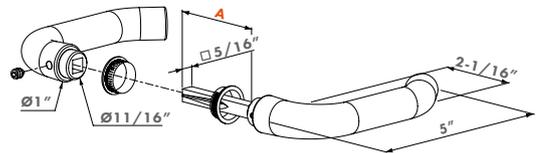

ORDER CODE

3006D-H

A

Follower length 4-3/4"




3006J-H

Handle pair in aluminum for insert locks

Handle pair in aluminum with square 4-3/4" spindle for insert locks.

SPECIFICATIONS

- Square 8 mm shaft (appx 5/16")
- Special design avoids bumping of the hand against the stop plate

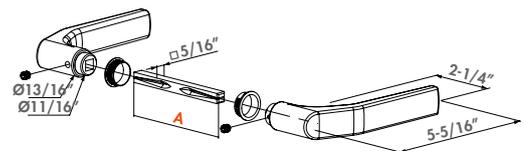

ORDER CODE

3006J-H

A

Follower length 4-3/4"




3006M-H

Handle pair in aluminum for insert locks

Aluminum handle pair with 4-3/4" long spindle for use with insert locks

SPECIFICATIONS

- Square 8 mm shaft (appx 5/16")
- Handle pair in anodized aluminum

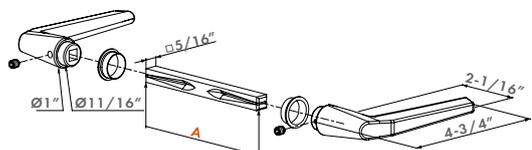

ORDER CODE

3006M-H

A

Follower length 4-3/4"




3006I-H

Handle pair in stainless steel for insert locks

Handle pair in stainless steel with square 4-3/4" spindle for insert locks.

SPECIFICATIONS

- Square 8 mm shaft (appx 5/16")
- Handle pair in stainless steel

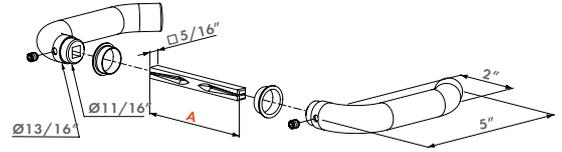

ORDER CODE

3006I-H

A

Follower length 4-3/4"




NEW 3006PAD-H

Handle set with rounded corners in anodised aluminum

Handle set with rounded corners in anodized aluminum.

SPECIFICATIONS

- Square 8 mm shaft (appx 5/16")
- Available in two colors: RAL 9005 & SILV

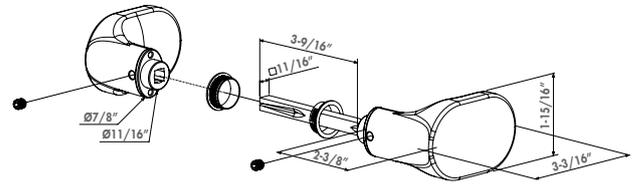


ORDER CODES

3006PAD-H

A

Follower length 4-3/4"

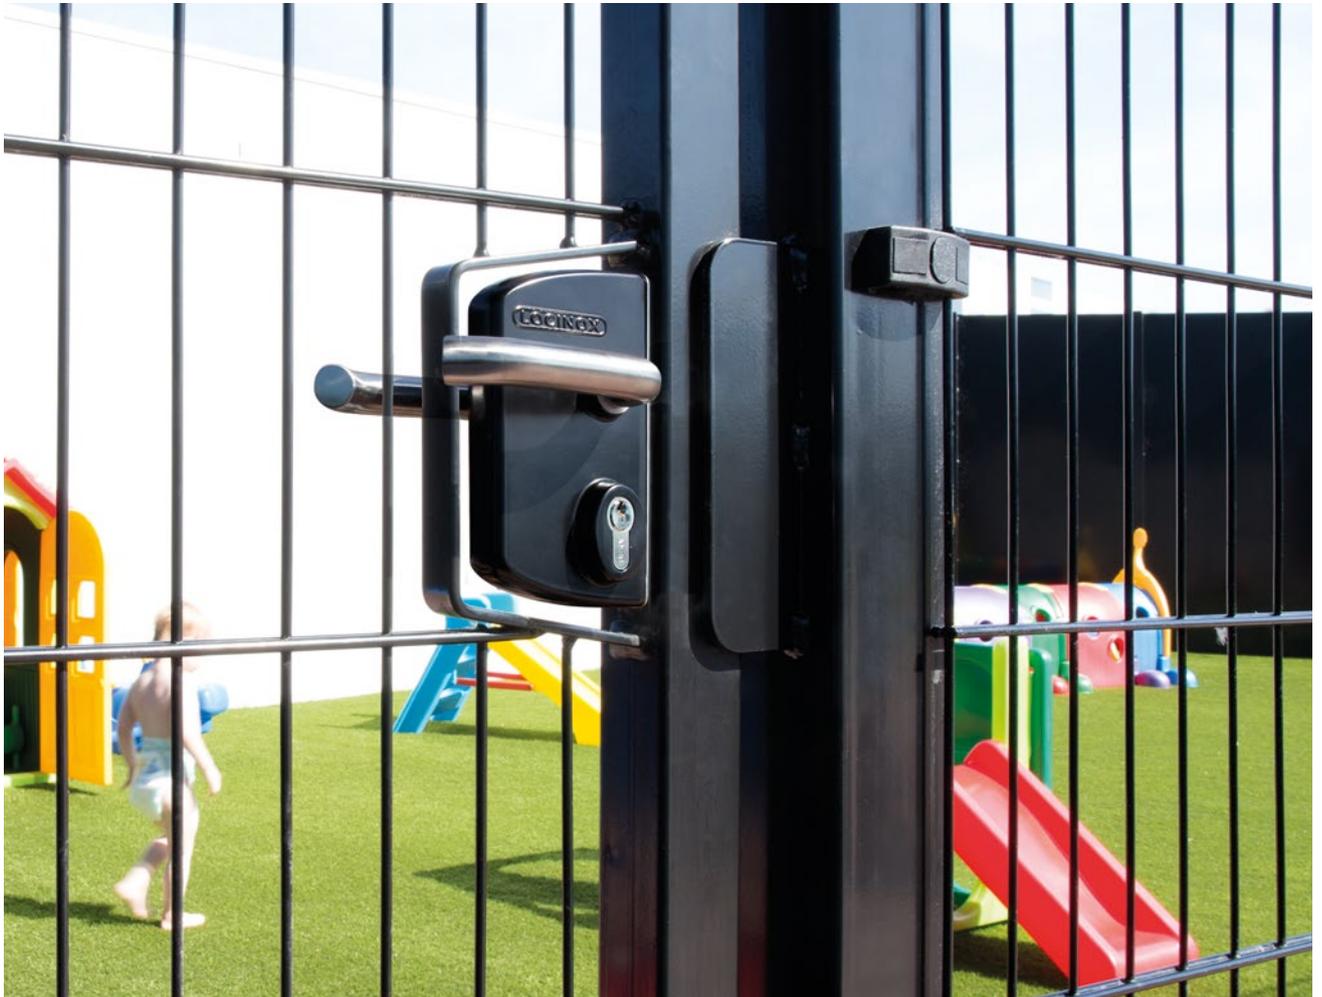



24h
SHIPPING

SHIELD

Anti-theft protection plate for Locinox keeps


Vandal-proof protection plate in aluminum. This plate protects the latch bolt and the night bolt. Compatible with Locinox keeps (type SA, SH and Modulec).

COLOR OPTIONS



SPECIFICATIONS

- Vandal-proof protection plate
- Powder coated aluminum housing
- Provided with plastic sliding sleeves for a perfect pen guidance. Very convenient in combination with gate closers
- Shield can easily be mounted on the surface mounted lock and is available for gate frames of 1-1/2" to 2-1/2"

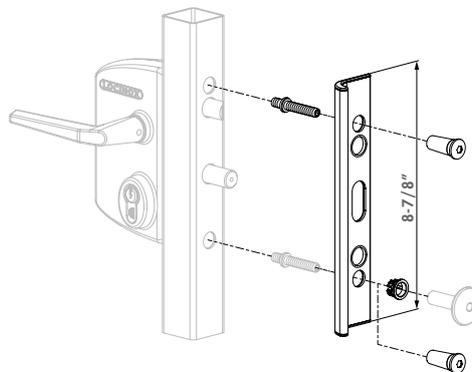

COMPATIBLE KEEPS



MODULEC-SA
P. 112

MODULEC-SH
P. 112

SAKLQF
P. 113

ORDER CODE

SHIELD

Anti-theft protection plate for standard SA/SH and Modulec-SA/SH keeps **24h** SHIPPING



24h
SHIPPING


SHIELDLINE

Aesthetic closure of the opening between gate wings

6 foot 7 inch profile of extruded aluminum that fills the space between the two gate wings for increased privacy. Works in conjunction with the SFKU and can also be applied to the hinge sides.

SPECIFICATIONS

- Extruded aluminum
- 6 foot, 7 inches long
- Compatible with SFKU: connection parts delivered in SFKU packaging
- Available in ALUM, RAL7016 and RAL9005

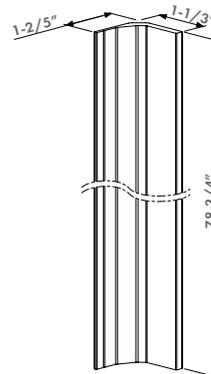

COMPATIBLE KEEP



SFKU
P. 122

SFKU-V
P. 127

UNILEC
P. 123

ORDER CODE

SHIELDLINE-SFKU-40- Aesthetic closure of the opening between gate wings **24h** SHIPPING

LOCK.GUIDE




24h
SHIPPING

SPECIFICATIONS

- 2 mm (3/32") thick stainless steel guidance plate
- Combinable with all surface mounted gate locks
- Available for 1-1/2" to 4" gate frames

Guide plate for a smooth guidance of the bolts of the surface mounted lock

Stainless steel guide plate for a smooth guidance of the bolts of any surface mounted Locinox lock. Easy installation guaranteed.

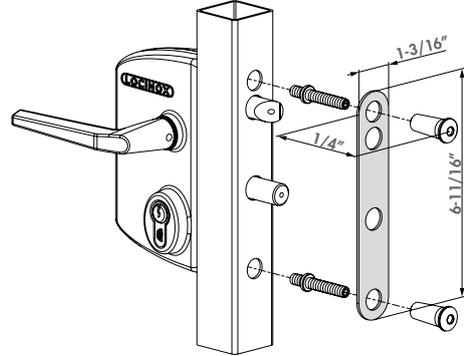

COMPATIBLE LOCKS



LAKQU2
P. 71

LPKQU2
P. 75

ORDER CODES

LOCK.GUIDE-4060	Guide plate for 1-1/2" to 2-1/2" gate frames	24h SHIPPING
LOCK.GUIDE-80100	Guide plate for 3" to 4" gate frames	

3018MOD

Adaptor plate for Modulec strike




24h
SHIPPING

SPECIFICATIONS

- Aluminum adaptor plate for Modulec on round profiles
- Black anodized
- Separate versions for SA and SH available
- Is easily installed between strike and post

Adaptor plate for square to round posts for Modulec electric strike. The plate is mounted between strike and post. A perfect fit for round posts.

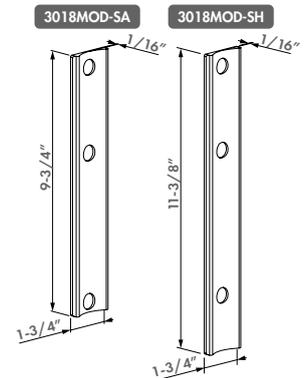

COMPATIBLE KEEPS



MODULEC-SA
P. 112

MODULEC-SH
P. 112

ORDER CODES

3018MOD-SA	Adaptor plate for square to round posts for Modulec-SA electric strike	24h SHIPPING
3018MOD-SH	Adaptor plate for square to round posts for Modulec-SH electric strike	24h SHIPPING



24h
SHIPPING

3019LA

Adaptor plate for LA, LM and LS locks

Adaptor plate for gate frames for our Ornamental, Industrial, Electrical, Garden Gate, Swimming Pool, Mechanical Code, and Sliding Gate locks. The adaptor plate is mounted between the Lock and gate frame.

SPECIFICATIONS

- Aluminum adaptor plate for LA & LS locks
- Adaptor plate ⇒ Ø1-3/8" to 2-3/8"

ORDER CODE

3019LA Adaptor plate for round posts Ø1-1/2" **24h** SHIPPING



24h
SHIPPING

3018LA

Adaptor plate for SA keeps

The adaptor plate is mounted between the keep and post.

SPECIFICATIONS

- Polyamide adaptor plate for SA keep
- Adaptor plate ⇒ Ø2-3/8"

ORDER CODE

3018LA Adapter plate for round posts Ø2-9/16" **24h** SHIPPING



24h
SHIPPING

6403

Adaptor plate for SH keeps

The adaptor plate is mounted between the keep and post.

SPECIFICATIONS

- Aluminum adaptor plate for SH keeps
- Adaptor plate ⇒ Ø2-3/8"

ORDER CODE

6403 Adapter plate for round posts Ø2-9/16" **24h** SHIPPING



24h
SHIPPING

VENUS-ADAPTERPLATE

VENUS adapter plate for mounting on wall or 2-3/8" post

Aluminum adapter plate to mount the VENUS on a post 2-3/8" wide or on a wall. Easy attachment with the QUICK-FIX mounting bolts.

SPECIFICATIONS

- Compatible with any VENUS configuration
- Anodized aluminum profile, available in RAL 9005 & SILV
- Includes 5 QUICK-FIX for mounting the plate to the post and 3 screws for attaching the VENUS to the plate

ORDER CODE

VENUS-ADAPTERPLATE Adapter plate for mounting Venus on wall or 60 mm post **24h** SHIPPING

3018LION

Round chain link adaptor plate for Lion gate closer


Black anodized aluminum adaptor plate for square to round frames for Lion gate closer. The plate is mounted between gate closer and the round frame.



24h
SHIPPING

SPECIFICATIONS

- Aluminum adaptor plate for Lion
- Black anodized
- For Lion 180° version, for gate frames starting from 1-5/8"
- For both 90° and 180° mounting situations
- Is easily installed between gate closer and post

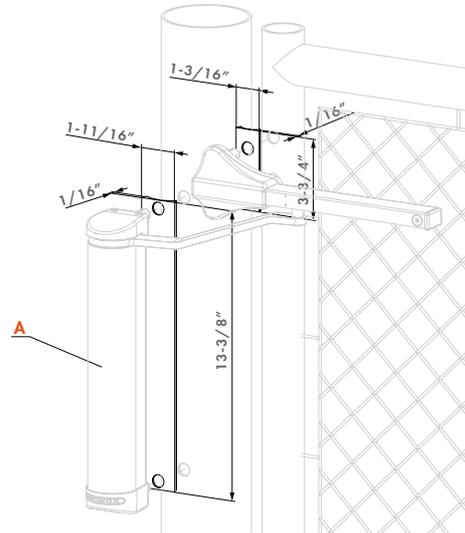

ORDER CODE

3018LION

A

Lion



24h
SHIPPING


SHELL-LION

Uncoated aluminum shell for Lion gate closer

Match the color of the Lion gate closer with the gate, or your company colors. The uncoated aluminum shell allows a powder coating in any color possible. The aluminum shell replaces the anodized shell which comes with the Lion. Aesthetical finish guaranteed, no fixation bolts are visible after mounting.

SPECIFICATIONS

- Shell must be powder coated to avoid corrosion
- Powder coating in any color possible
- Replaces the shell delivered with Lion

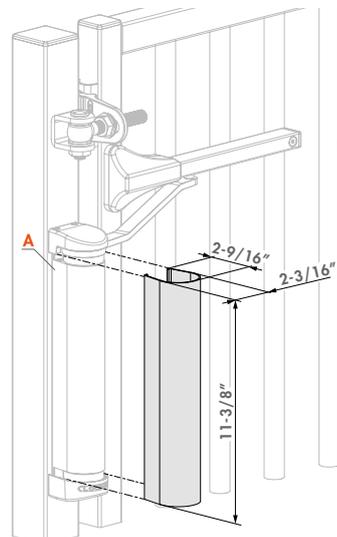

ORDER CODE

SHELL-LION-ALUM

A

Lion



24h
SHIPPING


SHELL-RHINO-VTC

Uncoated aluminum cover for the Rhino and Verticlose-2 gate closers

Match the color of the Rhino and Verticlose-2 gate closers with the gate, or your company colors. The uncoated aluminum shell allows a powder coating in any color possible. The aluminum shell replaces the anodized shell which comes with the Lion or Verticlose-2. Aesthetical finish guaranteed, no fixation bolts are visible after mounting.

SPECIFICATIONS

- Shell must be powder coated to avoid corrosion
- Powder coating in any color possible
- Replaces the shell delivered with Verticlose 2

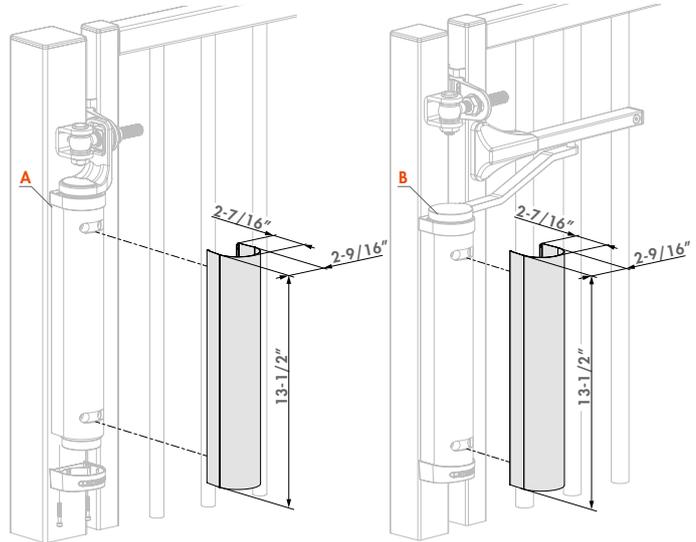

ORDER CODE

SHELL-RHINO-VTC-ALUM

A	B
Rhino	Verticlose-2






CLH

Chain link tension bar adapter

This tension bar adaptor fits around our industrial, electrical, garden and sliding gate locks to give an aesthetic, finished look to chain link gates. There is a separate chain link tension bar adapter available for the mechanical code locks.

SPECIFICATIONS

- Hot-dip galvanized steel
- Install with 2 tension bands (not included)
- Ties in with the tension bar for a finished look

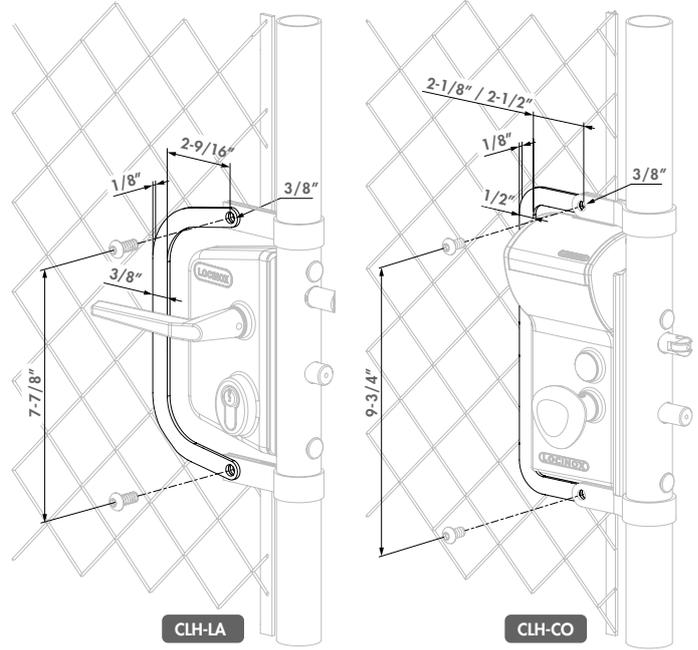

ORDER CODES

CLH-LA
CLH-CO

Chain link tension bar adaptor for standard gate locks
Chain link tension bar adaptor for mechanical code locks




SB

Galvanized bracket to mount Samson-2 to chain link fence

The chain link mounting bracket allows the Samson gate closer to easily adapt to gates with round profiles and round hinge posts. Brackets are galvanized steel with U-Bolts and stainless SD&T screws to lock the brackets into position. Available to fit 3" or 4" round posts and 1-5/8" or 1-7/8" gate frames.

SPECIFICATIONS

- Compatible with Samson-2
- Galvanized steel mounting brackets for round frames

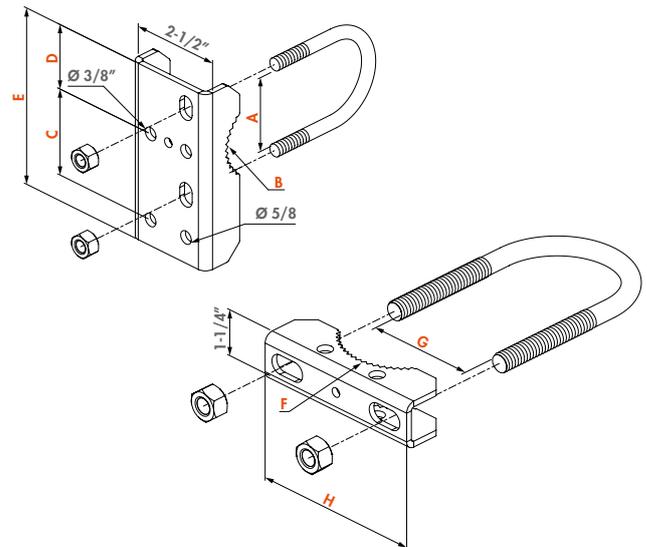

ORDER CODES

SB-3015
SB-3020
SB-4015
SB-4020

A	B	C	D	E	F	G	H
1-5/8"	1-5/8"	2-3/16"	1-9/16"	4-1/2"	3"	3"	4-3/4"
1-7/8"	1-7/8"	2-3/8"	1-3/4"	4-13/16"	3"	3"	4-3/4"
1-5/8"	1-5/8"	2-3/16"	1-9/16"	4-1/2"	4"	4"	5-7/8"
1-7/8"	1-7/8"	2-3/8"	1-3/4"	4-13/16"	4"	4"	5-7/8"


CLB-TIGER

Chain link bracket for Tiger gate closer



24h
SHIPPING

High quality aluminum bracket for installation of Tiger gate closer on round chain link fences. The brackets are installed between gate closer and post. A perfect, firm and easy installation is guaranteed thanks to the drilling jig. The brackets for the Puma hinge are included.

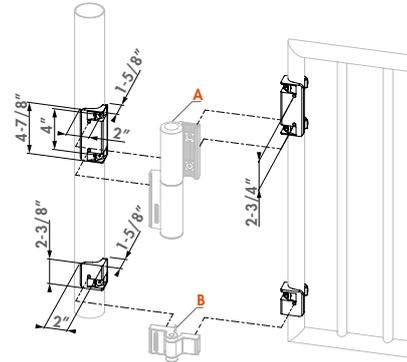

SPECIFICATIONS

- Aluminum anodized assembly brackets for Tiger on chain link fences
- Diameter post: 1-7/8" to 3"
- Diameter gate profile: 1-3/8" to 1-7/8"
- All fixations included
- Drilling jig included for easy installation
- Gap from 5/8" to 1-5/16"

ORDER CODE

CLB-TIGER

A **B**
Tiger Puma




24h
SHIPPING

CLB-MAMMOTH

Chain link bracket for Mammoth gate closer

High quality aluminum bracket for installation of Mammoth gate closer on round chain link fences. The brackets are installed between gate closer and post. A perfect, firm and easy installation is guaranteed thanks to the drilling jig. The brackets for the Dino hinge are included.

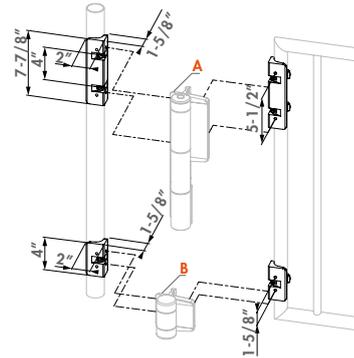

SPECIFICATIONS

- Aluminum anodized assembly brackets for Mammoth on chain link fences
- Diameter post: 1-7/8" to 4"
- Diameter gate profile: 1-3/8" to 1-7/8"
- All fixations included
- Drilling jig included for easy installation
- Gap from 1-3/16" to 2-1/16"

ORDER CODE

CLB-MAMMOTH

A **B**
Mammoth-180 Dino




24h
SHIPPING

CLB-CARACAL

Chain link bracket for Caracal gate closer

High quality engineered plastic bracket for installation of the Caracal gate closer on round chain link fences. The brackets are installed between the gate closer and the post. A perfect, firm and easy installation is guaranteed. The brackets for the Serval hinge are included.

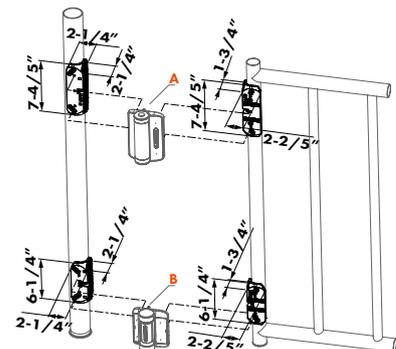

SPECIFICATIONS

- Engineered plastic brackets for Caracal on chain link fences
- Includes brackets for Serval hinge
- Diameter post: 1-7/8" to 3"
- Diameter gate profile: 1-3/8" to 1-7/8"
- All fixations included
- Gap from 1-3/16" to 2"

ORDER CODE

CLB-CARACAL

A **B**
Caracal Serval

VENUS-RAIL

Accessory for VENUS-S and VENUS-A in combination with 180° hinges




24h
SHIPPING

SPECIFICATIONS

- Compatible with VENUS-S and VENUS-A
- Anodized aluminium profile with plastic end caps
- Length: 59-1/16"
- Available in two colors: RAL 9005 & SILV

The VENUS-RAIL, made of anodized aluminum, facilitates the installation of VENUS-A and VENUS-S on gates with 180° hinges or gates without an upper frame. Cut the RAIL to size and attach easily with QUICK-FIX mounting bolts.

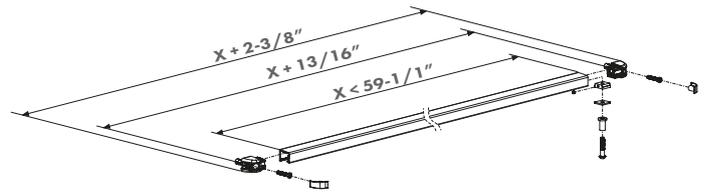

ORDER CODE

VENUS-RAIL

Compatible with

Panther Lion Verticlose-2

RAIL-FIT

Stainless steel accessory for gate closer installation on barred fencing




24h
SHIPPING

SPECIFICATIONS

- Stainless steel with polyamide finish
- Compatible with Panther, Lion and Verticlose-2 gate closers

Stainless steel accessory for installation of the gate closer rails on alternative fencing. The accessory can be clamped onto any bar to mount the rail of the Panther, Lion or Verticlose-2(-WALL) gate closer.

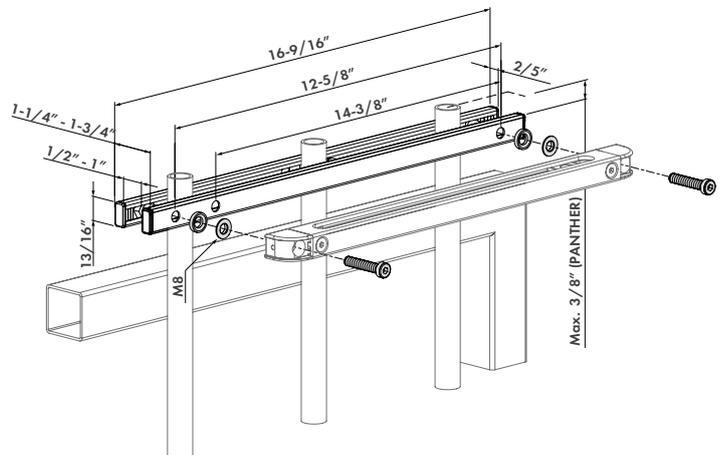

ORDER CODE

RAIL-FIT

Compatible with

Panther Lion Verticlose-2




24h
SHIPPING

NOSTEP

Anti climb device to be mounted on top of the Serval spring hinge

The NoStep is installed on top of the Serval spring hinge and avoids children to use Serval as a step to climb over the gate. Made out of Fiberglass reinforced PA, the NoStep matches perfectly with the Serval. Easy installation guaranteed.



SPECIFICATIONS

- Made out of Fiberglass reinforced PA
- To be mounted on top of the Serval spring hinge

ORDER CODE

NOSTEP

Compatible with

Serval




24h
SHIPPING

ROLLTOP

Adjustable rollerbolt

Stainless steel "rollerbolt" for LA-locks. It fits Industrial, Ornamental, Mechanical, Electrical, and Swimming Pool locks. The standard chamfered latch tip can be replaced with the rollerbolt to reduce latch resistance and allow the gate close easier. This ensures a smooth closing of the lock into the keep. The rollerbolt has a bolt adjustment hole for latch bolt length adjustment.



SPECIFICATIONS

- Adjustable rollerbolt in stainless steel
- Reduces latch resistance and allows the gate close easier
- Compatible with all surface mounted Locinox gate locks

ORDER CODES

ROLLTOP-30
ROLLTOP-40
ROLLTOP-60



A	B
11/16"	1-1/8"
1"	1-7/16"
1-13/16"	2-3/16"



How to choose your cylinder

For every specific need, there's a suitable euro profile cylinder. Choose a keyed alike cylinder for the convenience of one key operating multiple locks, or opt for keyed to differ cylinders for enhanced security with unique keys for each lock.

All euro profile cylinders come with 3 keys.

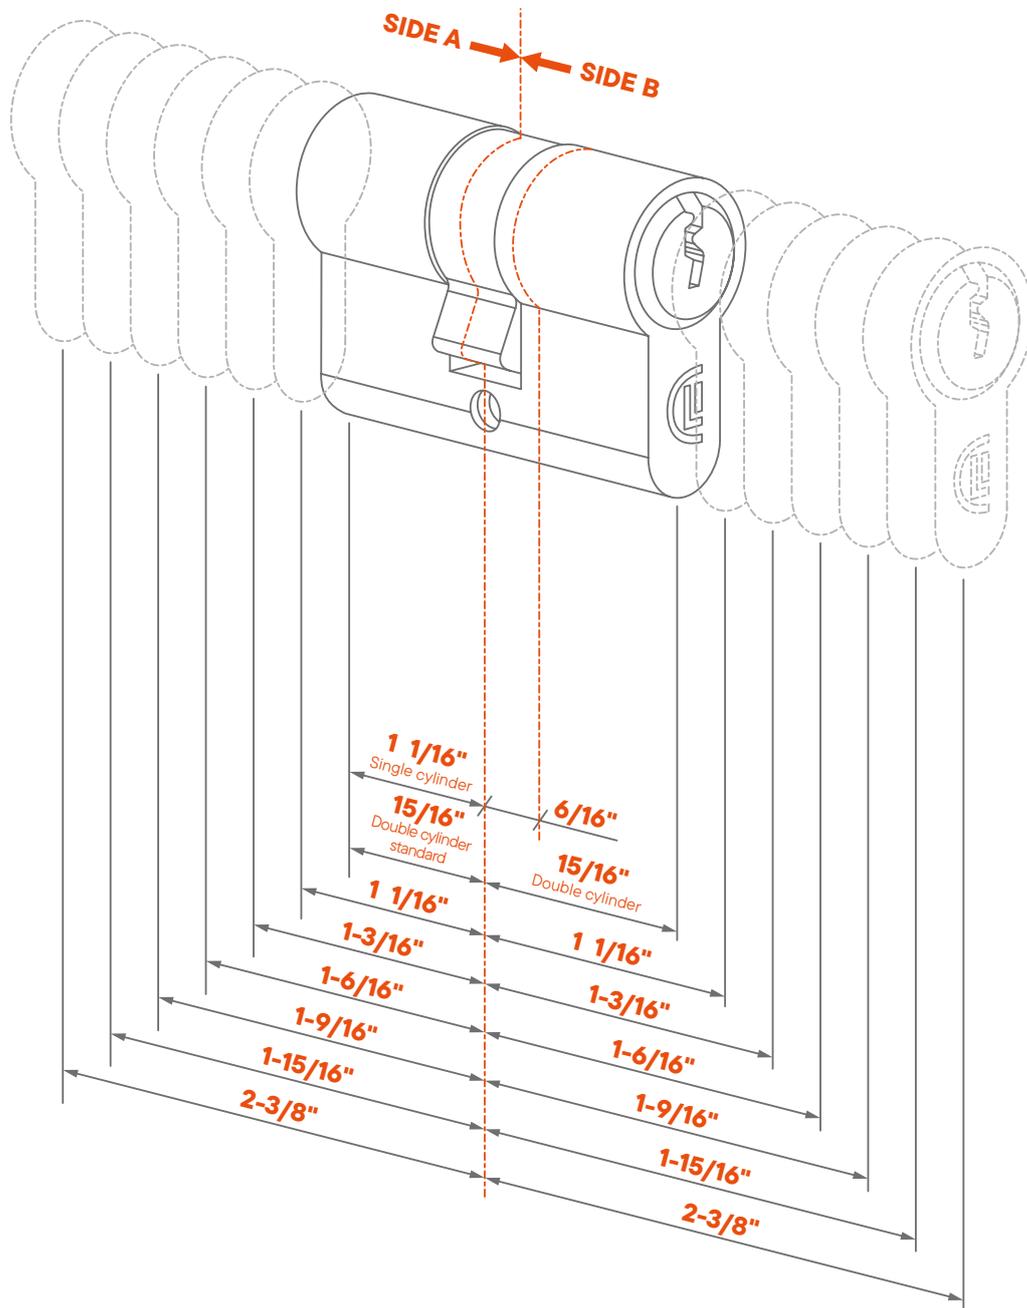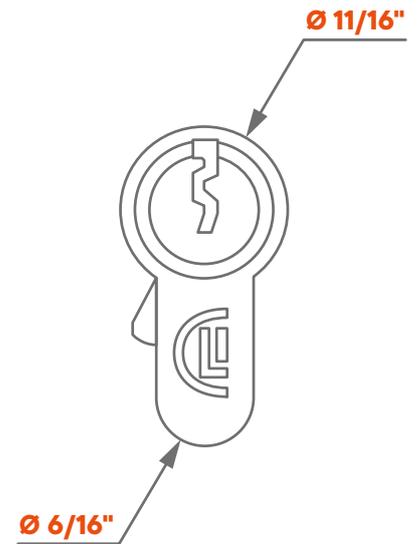



PRODUCT NAME		A	B	KEY CONFIGURATION	TYPICALLY USED IN	TYPE
3012-37-STD-GSZ	1-7/16"	6/16"	1-1/16"	Keyed alike Z	Drop bolts	Half cylinder - 1 side key, 1 side blind
3012-40-STD-VEA	1-9/16"	13/16"	13/16"	Keyed to differ	LAKZP1, Twist40	Symmetrical
3012-46-STD-VCA	1-13/16"	15/16"	15/16"	Keyed to differ	Free Vinci (LFKQX1), Valentino (LOKQY2L), LAKYF2	Symmetrical
3012-46-STD-GCD	1-13/16"	15/16"	15/16"	Keyed alike D	Free Vinci (LFKQX1), Valentino (LOKQY2L), LAKYF2	Symmetrical
3012-46-STD-GCC	1-13/16"	15/16"	15/16"	Keyed alike C	Free Vinci (LFKQX1), Valentino (LOKQY2L), LAKYF2	Symmetrical
3012-46-STD-GCB	1-13/16"	15/16"	15/16"	Keyed alike B	Free Vinci (LFKQX1), Valentino (LOKQY2L), LAKYF2	Symmetrical
3012-46-STD-GCA	1-13/16"	15/16"	15/16"	Keyed alike A	Free Vinci (LFKQX1), Valentino (LOKQY2L), LAKYF2	Symmetrical
3012-54-STD-VSZ	2-2/16"	1-1/16"	1-1/16"	Keyed to differ	Vinci (LMKQV2), LAKQU2, LSKZU2, LAKQH2, LDKZD1, LGKZD1, Fortylock	Symmetrical
3012-54-STD-GSZ	2-2/16"	1-1/16"	1-1/16"	Keyed alike Z	Vinci (LMKQV2), LAKQU2, LSKZU2, LAKQH2, LDKZD1, LGKZD1, Fortylock	Symmetrical
3012-54-STD-GSY	2-2/16"	1-1/16"	1-1/16"	Keyed alike Y	Vinci (LMKQV2), LAKQU2, LSKZU2, LAKQH2, LDKZD1, LGKZD1, Fortylock	Symmetrical
3012-54-STD-GSX	2-2/16"	1-1/16"	1-1/16"	Keyed alike X	Vinci (LMKQV2), LAKQU2, LSKZU2, LAKQH2, LDKZD1, LGKZD1, Fortylock	Symmetrical
3012-54-STD-DSA	2-2/16"	1-1/16"	1-1/16"	Dummy	For panic gates - disables deadbolt locking	Symmetrical dummy
3012-60-STD-VSZ	2-3/8"	1-3/16"	1-3/16"	Keyed to differ	Fiftylock	Symmetrical
3012-60-STD-GSZ	2-3/8"	1-3/16"	1-3/16"	Keyed alike Z	Fiftylock	Symmetrical
3012-70-STD-VSZ	2-12/16"	1-6/16"	1-6/16"	Keyed to differ	Sixtylock	Symmetrical
3012-70-STD-GSZ	2-12/16"	1-6/16"	1-6/16"	Keyed alike Z	Sixtylock	Symmetrical
3012-80-STD-VSZ	3-1/8"	1-9/16"	1-9/16"	Keyed to differ	Eightylock	Symmetrical
3012-80-STD-GSZ	3-1/8"	1-9/16"	1-9/16"	Keyed alike Z	Eightylock	Symmetrical
3012-30-50-STD-VSZ	3-1/8"	1-3/16"	1-15/16"	Keyed to differ	Vita, Vera	Assymmetrical
3012-30-50-STD-GSZ	3-1/8"	1-3/16"	1-15/16"	Keyed alike Z	Vita, Vera	Assymmetrical
3012-35-50-STD-VSZ	3-3/8"	1-6/16"	1-15/16"	Keyed to differ	Vita, Vera	Assymmetrical
3012-35-50-STD-GSZ	3-3/8"	1-6/16"	1-15/16"	Keyed alike Z	Vita, Vera	Assymmetrical
3012-35-55-STD-VSZ	3-9/16"	1-6/16"	2-3/16"	Keyed to differ	Vita, Vera	Assymmetrical
3012-35-55-STD-GSZ	3-9/16"	1-6/16"	2-3/16"	Keyed alike Z	Vita, Vera	Assymmetrical
3012-40-55-STD-VSZ	3-12/16"	1-9/16"	2-3/16"	Keyed to differ	Vita, Vera	Assymmetrical
3012-40-55-STD-GSZ	3-12/16"	1-9/16"	2-3/16"	Keyed alike Z	Vita, Vera	Assymmetrical
3012-50-50-STD-VSZ	3-15/16"	1-15/16"	1-15/16"	Keyed to differ	Vita, Vera	Symmetrical
3012-50-50-STD-GSZ	3-15/16"	1-15/16"	1-15/16"	Keyed alike Z	Vita, Vera	Symmetrical
3012-40-60-STD-VSZ	3-15/16"	1-9/16"	2-3/8"	Keyed to differ	Vita, Vera	Assymmetrical
3012-40-60-STD-GSZ	3-5/16"	1-9/16"	2-3/8"	Keyed alike Z	Vita, Vera	Assymmetrical
3012-45-60-STD-VSZ	4-2/16"	1-12/16"	2-3/8"	Keyed to differ	Vita, Vera	Assymmetrical
3012-45-60-STD-GSZ	4-2/16"	1-12/16"	2-3/8"	Keyed alike Z	Vita, Vera	Assymmetrical
3012-55-55-STD-VSZ	4-5/16"	2-3/16"	2-3/16"	Keyed to differ	Vita, Vera	Symmetrical
3012-55-55-STD-GSZ	4-5/16"	2-3/16"	2-3/16"	Keyed alike Z	Vita, Vera	Symmetrical
3012-60-60-STD-VSZ	4-12/16"	2-3/8"	2-3/8"	Keyed to differ	Vita, Vera	Symmetrical
3012-60-60-STD-GSZ	4-12/16"	2-3/8"	2-3/8"	Keyed alike Z	Vita, Vera	Symmetrical



24h
SHIPPING

3012-60-KNOB

60 mm cylinder (2-3/8" L)

Europrofile cylinder with three keys and knob-turn on one side (single cylinder). Used when a free exit is required on one side.

SPECIFICATIONS

- 60 mm (2-3/8") Europrofile cylinder with three keys
- One side key / one side knob
- Free entrance on one side

ORDER CODES

3012-60-KNOB-GSZ Symmetric 1-1/4" - 1-1/4" knob cylinder, keyed alike **24h** SHIPPING

3012-60-KNOB-VSZ Symmetric 1-1/4" - 1-1/4" knob cylinder, keyed to differ **24h** SHIPPING



3012-POC

Triangular cylinder set for triangle keys

Stainless steel symmetric Europrofile cylinder set with which you can equip each Locinox lock with a triangular key access control on cylinder level. Available for the 7/16", 9/16" or 11/16" triangle key. Applications: waste management, access fire brigade, parking facilities,...

SPECIFICATIONS

- Quick and easy retro-fitting assembly
- Can replace every 2-1/8" - 2-3/8" Europrofile cylinder

ORDER CODES

3012-POC-T11 2-1/8" to 2-3/8" triangular cylinder for 7/16" triangle key

3012-POC-T14 2-1/8" to 2-3/8" triangular cylinder for 9/16" triangle key

3012-POC-T17 Symmetric 2-1/8" - 2-1/2" triangular cylinder, for 5/8" keys



24h
SHIPPING

KIK-114

Rekeyable Key-In-Knob cylinder

Rekeyable Key-In-Knob (KIK) cylinder set with 2 keys, provided as standard in the FortiMa pool latch. Available in keyed alike and keyed to differ.

SPECIFICATIONS

- Schlage C-Keyway
- 5 Pins code (6 pins drilled - rekeyable)
- Satin Nickle Plated

ORDER CODES

KIK-114-GMA Cylinder keyed alike **24h** SHIPPING

KIK-114-VMZ Cylinder keyed to differ **24h** SHIPPING



24h
SHIPPING

MRT-118

Mortise cylinders set

Set with 2x Mortise cylinders and 4 keys. Fits our new LUKY lock. Cylinders available in keyed alike and keyed to differ.

SPECIFICATIONS

- Length 1"1/8
- Adams Rite cam type 863A
- 5 Pins code (6 pins drilled - rekeyable)

ORDER CODES

MRT-118-GMA Cylinder keyed alike **24h** SHIPPING

MRT-118-VMZ Cylinder keyed to differ **24h** SHIPPING



24h
SHIPPING

3070-46

Blank key 1-13/16"

Key blank that allows you to reproduce copies

SPECIFICATIONS

- Blank key for cylinder 1-13/16"
- For reproducing cylinders keys for 3012-46-STD

ORDER CODE

3070-46 Blank key for reproducing 2-1/8" cylinders **24h** SHIPPING



3070-60

Key blanks for 60 mm (2-3/8") Euro cylinders

Key blanks for 60 (2-3/8") and 80 mm (3-1/8") Euro cylinders.

SPECIFICATIONS

- Key blanks for XX mm (XX") Euro cylinders
- For reproducing keys for 3012-XX-STD cylinders

ORDER CODE

3070-60 Key blanks for 60 mm (2-3/8") Euro cylinders



3071

Triangle Key

Compatible with a lock that is equipped with an 7/16" or 9/16" triangle instead of a handle.

SPECIFICATIONS

- Compatible with 3012-POC-T11 / 3012-POC-T14 / 3006T11
- Zinc-plated

ORDER CODES

3071-T11 7/16" triangle key for cylinder 3012-POC-T11

3071-T14 9/16" triangle key for cylinder 3012-POC-T14



SECUNUT

Security "break-off" nuts

Stainless steel anti-theft nuts for security applications.

SPECIFICATIONS

- Stainless steel security nuts for anti-theft applications
- Available in M6, M8 and M10

ORDER CODES

SECUNUT-M8 Anti-theft nuts M8, Packed per 100 pieces

SECUNUT-M10 Anti-theft nuts M10, Packed per 50 pieces



ACCESSORIES FOR GATES




KEYSAFE-QF

Keysafe tube mount with Quick-Fix

Stainless steel Keysafe. Supplied with Quick-Fix to mount inside metal profiles. Used for a safe storage of your spare gate lock keys.

SPECIFICATIONS

- Keysafe with Europrofile cylinder
- For safe storage of your gate lock keys
- Rust-resistant front cover
- Stainless steel cylinder cover
- Aluminum housing
- Fast and easy fixation with Quick-Fix bolts

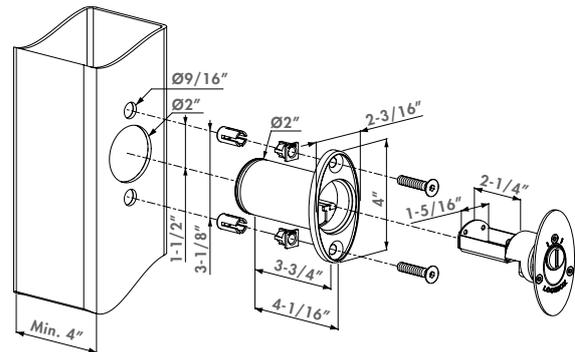

ORDER CODE

KEYSAFE QF

Including 3012-37-STD-GSZ



24h
SHIPPING


GATESTOP

Gate stop with rubber bumper

Aluminum gate stop. The rubber stop prevents the gate from being damaged. Height adjustable from 4" to 5-1/2". Can also be used as a wall stop. Includes anchor bolt.

SPECIFICATIONS

- Fast and easy installation
- Height adjustable: min 4" to 5-1/2" max
- Aluminum body with rubber stop
- Included anchor bolt M12 for concrete mounting



ORDER CODE

GATESTOP

Including anchor bolt




EN 12604 **24h**
SHIPPING

U-SAFE

Stainless steel safety cable for gates up to 1,100 lbs

The U-Safe gate safety cable provides additional security to your gates. Should the gate become detached, the U-safe will keep it from falling down. Thanks to the patented Quick-Fix anchor bolts, the U-Safe easily installs onto the post and gate frame.

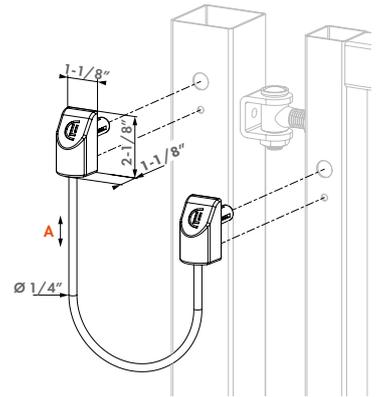

SPECIFICATIONS

- Stainless steel safety cable rated at 3,300 lbs.
- Cable length of 11-13/16", thickness of 3/16" thick with protective transparent sleeve of 1/16"
- Installed using Quick-Fix anchor bolts (rated at 2,000 lbs. each)
- EN 12604 compliant
- For gates up to 1,100 lbs
- Easy installation guaranteed

ORDER CODE

U-SAFE

A

Length 11-3/4"




EN 12604 **24h**
SHIPPING

B-SAFE

Stainless steel safety cable for gates up to 1,100 lbs

The B-Safe gate safety cable provides additional security to your gates. Should the gate become detached, the B-Safe will keep it from falling down. Thanks to the patented Quick-Fix anchor bolts, the B-Safe easily installs onto the post and gate frame. The B-Safe is recommended for gates up to 1,100 lbs, being rated up to 2,200 lbs, and has been developed to secure a gate in accordance with EN 12604.

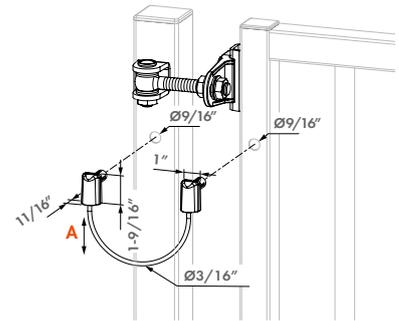

SPECIFICATIONS


- Cable length of 8-11/16", thickness of 3/16" thick with protective transparent sleeve of 1/16"
- Firmly fixed thanks to patented Quick-Fix system
- EN 12604 compliant
- For gates up to 1,100 lbs
- Easy installation guaranteed

ORDER CODE

B-SAFE

A

8-1/2"

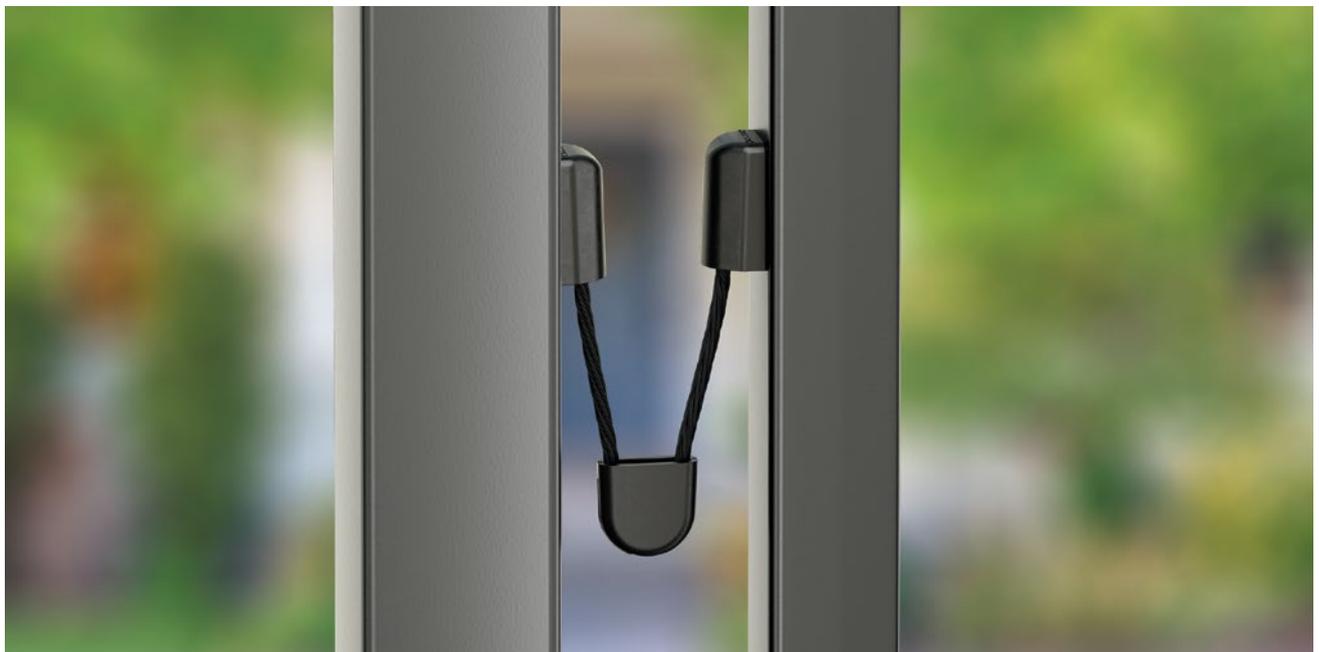




TC

Post plug

Polypropylene post plugs.

SPECIFICATIONS

- Polypropylene post plug for square profiles
- Available in RAL6005 and RAL9005



ORDER CODES

For square profiles	For rectangular profiles	A	B	C	D
TC-4040		1-1/2"	3/16"	3/4"	
TC-5050		2"	3/16"	3/4"	
TC-6060		2-3/8"	3/16"	3/4"	
	TC-4060	1-1/2"	2-3/8"	3/16"	3/4"




TCR

Post caps

Polypropylene post caps.

SPECIFICATIONS

- Polypropylene post cap for round profiles
- Available in RAL6005 and RAL9005



ORDER CODES

For round profiles	A	B
TCR-42	Ø1-3/4"	1-3/16"
TCR-48	Ø2"	1-3/16"
TCR-60	Ø2-1/2"	1-1/2"




TCO-STD

Square post cap

Polypropylene post cap. Protects the upper borders of the posts.

SPECIFICATIONS

- Polypropylene square post cap for 2-3/8"x2-3/8", 3-1/8"x3-1/8" and 3-15/16"x3-15/16"
- Protects upper borders of posts

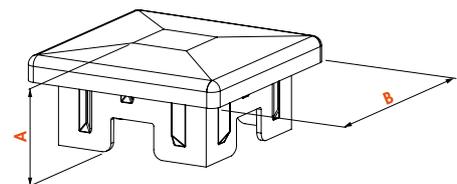

ORDER CODES

For square profiles	A	B
TCO-STD-6060	1-5/8"	2-11/16"
TCO-STD-8080	1-5/8"	3-1/2"
TCO-STD-100100	1-7/8"	4-5/16"




TCO-SCR

Post cap to screw on

Hot-dip galvanized post caps with screw hole. Perfect to protect and finish your posts. Applications: wood, aluminum or metal.

SPECIFICATIONS

- Hot-dip galvanized post caps to screw on

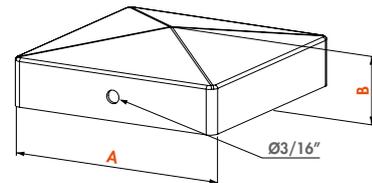

ORDER CODES

For square profiles

	A	B
TCO-SCR-HDG-4040	1-11/16"	7/8"
TCO-SCR-HDG-5050	2-1/16"	15/16"
TCO-SCR-HDG-6060	2-1/2"	15/16"
TCO-SCR-HDG-8080	3-1/4"	1"
TCO-SCR-HDG-100100	4-1/16"	1-1/16"
TCO-SCR-HDG-120120	4-13/16"	1-1/8"




TCO-WLD

Post caps to weld on

Zinc-plated post caps to weld on. Perfect to protect and finish your posts. Applications: metal.

SPECIFICATIONS

- Zinc plated post caps to weld on

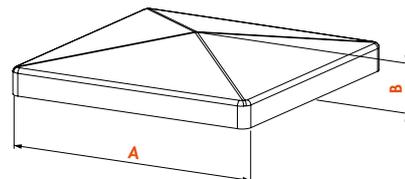

ORDER CODES

Black steel post caps	Zinc-plated post caps	A	B
TCO-WLD-B-4040	TCO-WLD-Z-4040	1-11/16"	1/2"
TCO-WLD-B-5050	TCO-WLD-Z-5050	2-1/8"	1/2"
TCO-WLD-B-6060	TCO-WLD-Z-6060	2-1/2"	9/16"
TCO-WLD-B-8080	TCO-WLD-Z-8080	3-5/16"	5/8"
TCO-WLD-B-100100	TCO-WLD-Z-100100	4-1/16"	11/16"
TCO-WLD-B-120120	TCO-WLD-Z-120120	4-7/8"	3/4"



PKWB2000

Security strip - weld on

Security strips in black steel to weld on. Packed per 20 pieces of 78-3/4" length.

SPECIFICATIONS

- Black steel for welding
- Mounting: weld on
- Profile: 1-5/16" x 1/8" thick
- Length: 78-3/4"
- Packed in tubes of 20 pcs 78-3/4" long

ORDER CODES

PKWB2000


PKWB2000-20

PKWB2000-100

PKWB2000-500

PKWB2000-1000

24h
SHIPPING

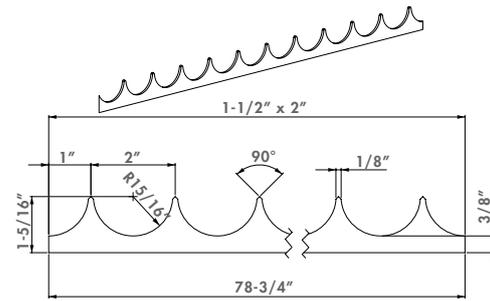

Security strips to weld on, packed in 1 tube of 20 pieces

Security strips to weld on, packed in 5 tubes of 20 pieces

Security strips to weld on, packed in 25 tubes of 20 pieces

Security strips to weld on, packed in 50 tubes of 20 pieces



PKSG2000

Security strip to screw on

Hot-dip galvanized L-security strips to screw on. Packed per 10 pieces of 78-3/4"

SPECIFICATIONS

- Hot-dip galvanized toothed L-profile
- Mounting: screw on
- Profile: 1-7/16" x 1" x 1/8" thick
- Length: 78-3/4"
- Easy to retrofit
- Packed in tubes of 10 pcs 78-3/4" long

ORDER CODES


PKSG2000

PKSG2000-10

PKSG2000-50

PKSG2000-250

24h
SHIPPING

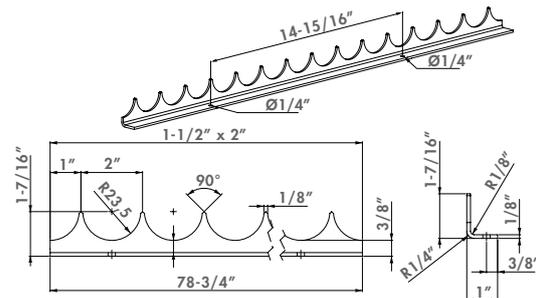

Security strips to screw on, packed in 1 tube of 10 pieces

Security strips to screw on, packed in 5 tubes of 10 pieces

Security strips to screw on, packed in 25 tubes of 10 pieces



PKWB2000-EP

Electrogalvanized security strips to weld on

Electrogalvanized security strips to weld on. Packed per 20 pieces of 78-3/4".

SPECIFICATIONS


- Mounting: weld on
- Profile: 1-5/16" x 1/8" thick
- Length: 78-3/4"
- Packed in tubes of 20 pcs 78-3/4" long

ORDER CODES

PKWB2000-EP

PKWB2000-EP-20

PKWB2000-EP-100

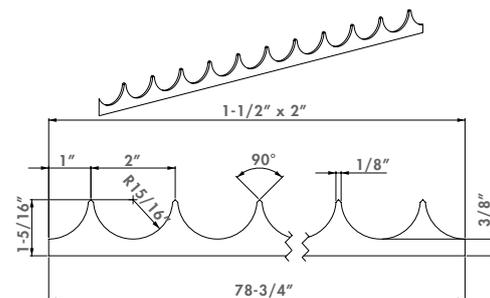

Electrogalvanized security strips to weld on, packed in 1 tube of 20 pieces

Electrogalvanized security strips to weld on, packed in 5 tubes of 20 pieces



EXTREMELY PRODUCTS

LOCINOX
together

SALES SUPPORT TOOLS

TIGER
LA NOUVELLE RÉFÉRENCE POUR CHARNIÈRES HYDRAULIQUES AVEC RAPPS DE TÊTE MÉTRIF

180°

GAIN DE TEMPS
Installation rapide et facile avec fixation brevettée Quick-Fix

RÉSISTANCE AUX INTÉMPÉRIES
Fonctionne parfaitement en toute saison

VITESSE & A-COUP FINAL
Facile à régler par clé Allen

500.000 CYCLES
Testé de façon intensive, extrêmement fiable

3 YEAR WARRANTY

LOCINOX



Sales support tools

Convince your clients of the Locinox quality. We developed several gate displays and demo cases of our best selling products. Every featured Locinox product is full-scale and functioning just like in real-life.

These handy sales support tools perfectly claim what Locinox is standing for: exceptional quality, good value, extreme durability, user friendly comfort, easy installation, and much more. Let the lightweight gate displays and complete demo cases be your closest ally during sales visits or showcase them in your showroom. They will be an eyecatcher and make your sales talks much easier, believe us.

LOCINOX



PS-GATECLOSERS

Gate closer display with 5 different gate closers

Real-scale gate closer gate display with Tiger, Mammoth, Samson-2, Lion and Verticlose-2 gate closers. This display is an excellent sales tool to showcase the quality solutions for your showroom, events and trade fairs.

SPECIFICATIONS

- Includes gate with Tiger gate closer, Fortylock insert lock, VERA code lock Puma hinge and SFKU-V keep
- Includes gate with Mammoth gate closer, SlimStone keypad, Modulec-SA keep, LAKQ lock and Dino hinge
- Includes gate with Samson-2 gate closer, Valentino (LOKQ) lock, Shield, SHKL keep and BoltonHD-4D hinge
- Includes gate with Lion gate closer, LAKZ lock, SMKL keep and Bolton-HD-4D hinge
- Includes gate with Verticlose-2 gate closer, LDKZ lock, SAKL keep and G90Z hinge

ORDER CODE

PS-GATECLOSERS

Full scale display with 5 gate closers and gate hardware

GATE CLOSERS



MAMMOTH180
P. 20



TIGER
P. 19



LION
P. 24



VERTICLOSE-2
P. 27



SAMSON-2
P. 23

ACCESS CONTROL



SLIMSTONE-2
P. 38



LOKQY2
P. 76



VERA
P. 101



MODULEC-SA
P. 112

GATE HARDWARE



FORTYLOCK
P. 94



LAKQU2
P. 71



LDKZD1
P. 74



LAKZP1
P. 84



24h
SHIPPING

PS-LION

Gate display with Lion gate closer, industrial lock and 90° hinge

Aluminum gate display featuring the Lion hydraulic gate closer with a hot-dip galvanized 90° hinge, an industrial lock and a stainless steel keep.

SPECIFICATIONS

- High quality and lightweight aluminum display
- Information panel in 4 languages

ORDER CODE

PS-LION Gate display with Lion gate closer, industrial lock and 90° hinge **24h** SHIPPING



24h
SHIPPING

PS-TIGER

Gate display with Tiger gate closer and industrial lock

Aluminum gate display featuring the Tiger hydraulic gate closer with the industrial lock and stainless steel keep.

SPECIFICATIONS

- High quality and lightweight aluminum display
- Information panel in 4 languages

ORDER CODE

PS-TIGER Gate display with Tiger gate closer and industrial lock **24h** SHIPPING



24h
SHIPPING

PS-RHINO

Gate display with Rhino gate closer, industrial lock and BoltonHD-4D hinge

Aluminum gate display featuring the Rhino hydraulic gate closer with the bolttable 180° BoltonHD-4D hinge, an industrial lock and a stainless steel keep.

SPECIFICATIONS

- High quality and lightweight aluminum display
- Information panel in 4 languages

ORDER CODE

PS-RHINO Gate display with Rhino gate closer, industrial lock and BoltonHD-4D hinge **24h** SHIPPING



24h
SHIPPING

RADIO

DAB+ radio with aux jack

Portable rechargeable DAB+ radio. Shock- and waterproof. A nice gadget for your fencing installers.

SPECIFICATIONS

- Shock- and waterproof
- Power: 10 Watt
- AUX-jack
- Chargeable batteries included

ORDER CODE


RADIO Portable site radio with chargeable batteries included **24h** SHIPPING

Codebuilder for swing gates LA - LP - LE - LI - LM - LF - LD - LU - LO


LOCK

L


CHASSIS

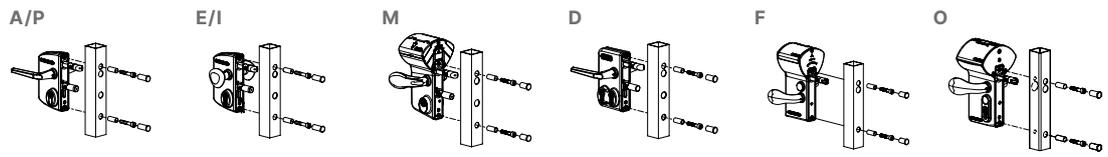

PROFILE

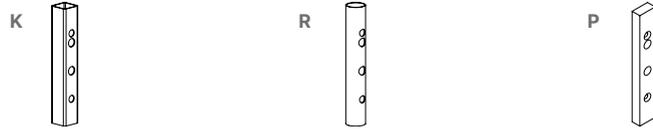


ADJUSTABILITY

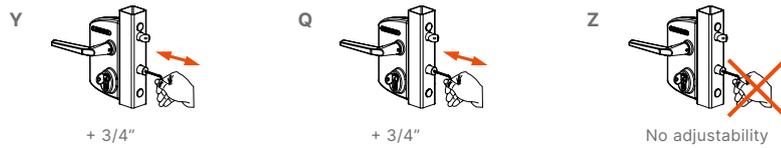

DIMENSIONS

- | | | | | | | |
|--------------|-----------|-----------|---------------------------|-----------|-----------|------------|
| 10 | 30 | 40 | 50 | 60 | 80 | 100 |
| • 3/8" | • 1-1/4" | • 1-1/2" | • 2" | • 2-1/2" | • 3" | • 4" |
| • Not for LE | | | • Only for Y, Z-mechanism | | | |


LOCK BOX

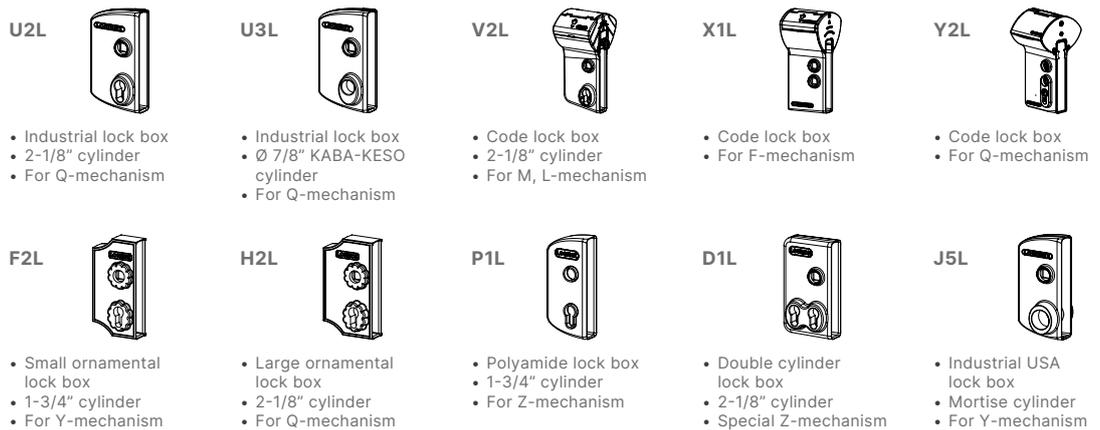


COLORS



CYLINDERS

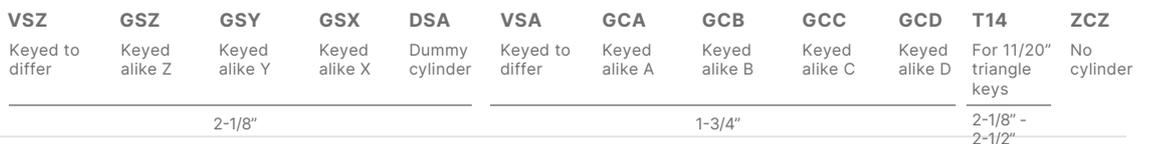

HANDLES

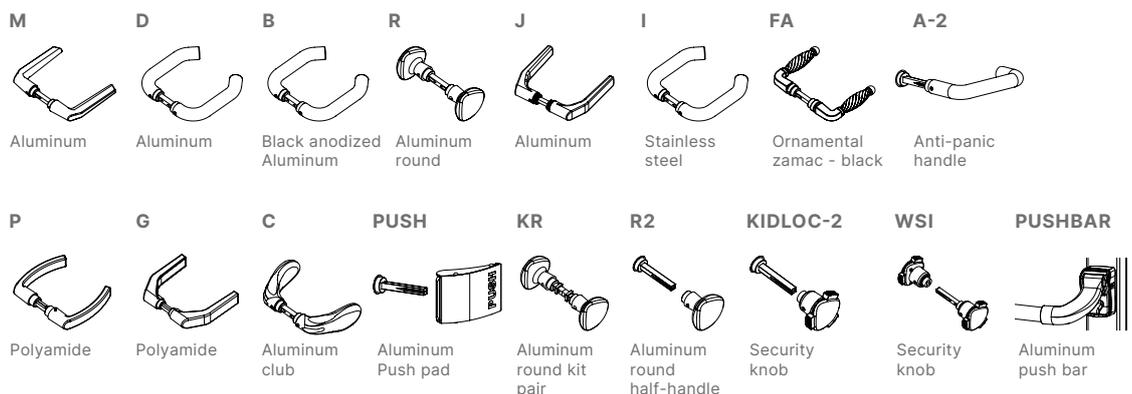


Codebuilder for sliding gates LS - LL - LG

LOCK

L

CHASSIS

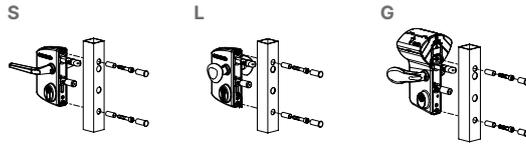

PROFILE




ADJUSTABILITY




DIMENSIONS

- | | | | | | |
|-----------------------|-------------------|-----------------------|-------------------|--------------------|--------------------|
| 40
• 1-1/2" | 50
• 2" | 60
• 2-1/2" | 80
• 3" | 100
• 4" | 120
• 5" |
|-----------------------|-------------------|-----------------------|-------------------|--------------------|--------------------|

LOCK BOX

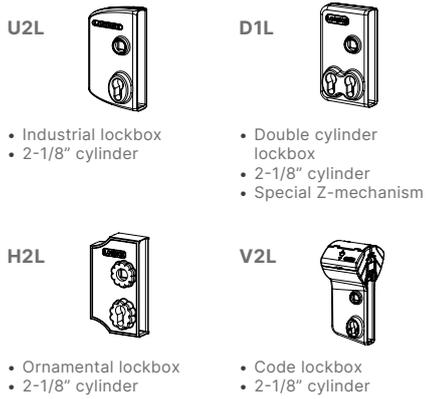


COLOURS



CYLINDERS




HANDLES



Aluminum reinforced

No handles

Handle compatibility




	SURFACE MOUNTED LOCKS	INSERT LOCKS			
		A = 1-3/8"	A = 1-1/2"	A = 2"	A = 2-3/8"
3006C/CB		•	•		
3006I		•	•	•	
3006D		•	•		
3006B		•	•		
3006A		•	•		
3006M		•	•		
3006J		•	•	•	
3006R/RB		•	•		
300FA		•	•		
3006P		•	•	•	
3006G		•	•	•	
3006B-H				•	•
3006D-H				•	•
3006I-H				•	•
3006M-H				•	•
3006J-H		•	•	•	•
3006R-2		•	•		
KIDLOC-2		•			
KIDLOC		•	•		
3006KR		•			
PUSHBAR		•		•	
3006PUSH		•			
3006T11		•			
3006FIX				•	•
3006-PAD				•	•
3006-HOLD				•	•

Minimum distances between gate and post

Perfect work begins with a perfect preparation!

All Locinox products can be adjusted accurately. We recommend however to consider the mounting depth when planning.

Below, you will find a clear overview of the minimum distances between gate and post. This guarantees that all is perfectly aligned.

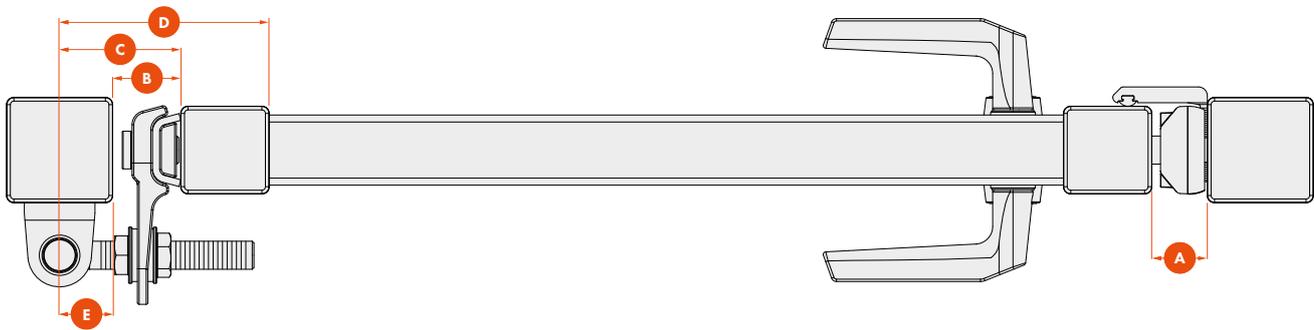

	B	C	D	E
HINGES	MINIMUM	MAXIMUM	MAXIMUM	MINIMUM
GBMU4D12	7/8"	3-1/8"	-	13/16"
GBMU4D16	1-3/8"	4-1/2"	-	1"
GBMU4D20	1-3/8"	5-1/8"	-	1"
EXCENTRO	1-3/8"	-	-	1-3/16"
BOLTONHD-4D-12	1/4"	2-3/4"	-	1-1/8"
BOLTONHD-4D-16	1/4"	3-1/2"	-	1-1/8"
GBMU-X-M12	1/4"	3"	-	13/16"
GBMU-X-M16	5/16"	3-3/4"	-	1"
GBMU-X-M18	5/16"	3-7/16"	-	1"
GBMU-X-M20	1/2"	4-3/8"	-	1"
GBMU-X-M22	1/2"	4-3/8"	-	1-3/16"
G90Z-X-M16	1-7/8"	1-3/16"	-	11/16"
G90Z-X-M20	2-1/16"	1-1/8"	-	15/16"
DINO	1/2"	1-11/16"	-	15/16"
PUMA	3/8"	13/16"	-	-
NOSEHINGE-I	1"	-	4"	2"
BEARING HINGE 40X40	1"	1"	-	2-3/8"
BEARING HINGE 50X50	13/16"	13/16"	-	2-1/8"
3DM	5/8"	3"	-	3/8"
4DW	0	1"	-	13/16"
3DW	0	1"	-	3/8"
GBM12-30-130	9/16"	-	4-11/16"	13/16"
GBM12-30-150	3/8"	-	4-11/16"	13/16"
GBM12-40-130	9/16"	-	5-1/2"	13/16"
GBM12-40-150	3/8"	-	5-1/2"	13/16"
GBM16-40-160	5/8"	-	5-7/8"	1"
GBM16-40-180	5/8"	-	6-5/8"	1"
GAM12-130	1-13/16"	-	4-11/16"	13/16"
GAM12-150	1-13/16"	-	5-1/2"	13/16"

	A
KEEPS	MINIMUM
SAKL	1-3/16"
SH KL	1-3/16"
SMKL	1-3/16"
SKRZ	1-1/16"
SE & SEH	1"
SPKZ	5/16"
SSKZ	13/16"
STKQF	1-1/16"
SF-	1/2"
MODULEC-SA	1-3/16"
MODULEC-SH	1-3/16"

	A
KEEPS	MINIMUM
SHKC	1/4"
SFKM	1/2"
SFKI	1/2"
SHKM	9/16"
SHKW	9/16"
SFKP	1-3/16"
SFKB	1-3/16"
SFKO	1-3/16"
SFKU	1/2"
MODULEC-SF	1-3/16"
INTRALEC	3/8"
UNILEC	1/16"

	B	C	D	E
HINGES	MINIMUM	MAXIMUM	MAXIMUM	MINIMUM
SWING40-130	3/8"	-	4-11/16"	13/16"
SWING40-150	3/8"	-	5-1/2"	13/16"
G-ORNA-LR-B-M20	1-3/8"	2-7/16"	-	1-5/8"
G-ORNA-LR-B-M24	1-3/8"	2-3/4"	-	1-3/4"
G-ORNA-LR-B-M27	1-1/4"	3-7/16"	-	1-13/16"
G90LR-X-M16-65	2-1/16"	2-3/8"	-	11/16"
G90LR-X-M16-110	2-1/16"	4-1/8"	-	11/16"
G90LR-X-M16-150	2-1/16"	5-11/16"	-	11/16"
G90LR-X-M20-67	2-1/2"	2-3/8"	-	7/8"
G90LR-X-M20-150	2-1/2"	5-11/16"	-	7/8"
G90WP-B-M16-65	2-3/8"	2-9/16"	-	11/16"
G90WP-B-M16-110	2-3/8"	4-3/8"	-	11/16"
G90WP-B-M16-150	2-3/8"	5-7/8"	-	11/16"
G90WP-B-M20-67	3"	2-5/8"	-	7/8"
G90WP-B-M20-150	3"	5-7/8"	-	7/8"

Table of contents

1001U	141	3006S	191
1002B	148	3006T11	186
1002M	141	3012-60-KNOB	206
1004ORNA	148	3012-POC	206
1005WP	149	3018LA	197
1034A2	138	3018LION	198
1034HDGA	137	3018MOD	196
1034ROLL-HDG	138	3019LA	197
1036	146	3020-HYB	105
1039SET	145	3025-HYB-BLIND-ALU	106
1040HDSM16	158	3025-HYB	105
1040TPSM12	158	3070-46	207
1041-01	158	3070-60	207
1127	146	3071	207
2005	60	3970LA	176
3006A-2	188	3970LS	176
3006B-2	189	3DM	149
3006B-H	193	3DW	159
3006B	190	4DFIX-I-12	142
3006C-2	189	4DFIX-I	142
3006C	189	4DW	159
3006CB	190	6403	197
3006D-2	189	ABK	172
3006D-H	193	ABL	172
3006D	191	AC-TRANS-12V-25W	60
3006FA	192	ARCO	43
3006FIX	184	B-MAG	53
3006G	192	B-SAFE	210
3006HOLD	184	BAR-A	185
3006I-H	194	BAR-I	185
3006I	192	BEARING HINGE	151
3006J-H	193	BOLTON-P	132
3006J	190	BOLTON-U	132
3006KR	184	BOLTONHD-4D	133
3006M-2	188	BOLTONHD-G	133
3006M-H	193	CARACAL	29
3006M	190	CGS	167
3006P	192	CLB-CARACAL	201
3006PAD-H	194	CLB-MAMMOTH	201
3006PAD	184	CLB-TIGER	201
3006PC	115	CLH	200
3006PULL	186	CONE	41
3006PUSH	186	CUBE	42
3006R-2	188	DC-ACCESS-12V-20W	60
3006R	191	DC-POWER-12V-20W	61
3006RB	191	DC-POWER-24V-25W	61



DINO	151	KLAUW12	141
DRILLFIX	177	KLAUW	142
DRILL HSS 15	176	LAKQH2	83
DURA	158	LAKQU2	71
DVK-HD	59	LAKQU3	72
DVK	58	LAKYF2	82
EGS	167	LAKZP1	84
EIGHTYLOCK	97	LAKZP1WSI	85
ELECTRADROP	163	LDKZD1	74
EXCENTRO	131	LEKQU2	80
FIFTYLOCK	95	LEONARDO	89
FIFTYSET	98	LFKQX1	79
FORTIMA	86	LGKZD1	91
FORTYLOCK	94	LIKQU2	81
FORTYSET	98	LION-VTC-DRILL	177
FREE VINCI	79	LION	24
G-ORNA-LR	147	LLKZV2	89
G-ORNA-WP	147	LMKQV2	78
G90LR	144	LNKQ (VOLTA)	77
G90WP	145	LOCK.GUIDE	196
G90Z	144	LOKQY2 (VALENTINO)	76
GAM12	157	LPKQU2	75
GATESTOP	209	LR	149
GATESWITCH	59	LSKZU2	90
GBM12-DP40	154	LUKYJ5	73
GBM12	154	MAG	47
GBM16-DP	155	MAGMAG	48
GBM16	155	MAGNUS	35
GBMU	137	MAGUNIT2500	54
GBMU4D	134	MAMMOTH-HD	21
GBMU4DSHIELD	134	MAMMOTH180	20
GRIP	143	MODULEC-SA	112
GRIP16-L	143	MODULEC-SF	124
GUARDIMA	87	MODULEC-SH	112
H-COMPACT	104	MRT-118	206
H-METAL-SET	103	MULTITOOLO	176
H-METAL-WB	104	N-LINE-B-MAG-KIT	56
H-METAL	103	N-LINE-B-MAG	55
H-WOOD-SET	107	N-LINE-MAG-KIT-3000	51
H-WOOD	107	N-LINE-MAG	49
HEPTA	44	N-LINE-S-MAG	55
HWLB	106	NOSEHINGE-A	152
IN-GATE CATCHER	173	NOSEHINGE-I	152
INTRALEC	124	NOSTEP	203
KEYDROP	165	O-SET	117
KEYSAFE-QF	209	OGS	168
KIDLOC-2	188	PANTHER	22
KIDLOC	186	PB-1	58
KIK-114	206	PKSG2000	213

PKWB2000-EP	213	SLIMSTONE-2	38
PKWB2000	213	SLIMSTONE-X	38
POWERSTONE	60	SMKLQF	114
PS-GATECLOSERS	216	SPKZ-QF	116
PS-LION	217	SPKZ-TK	116
PS-RHINO	217	SSKZ QF	117
PS-TIGER	217	STKQF	118
PUMA	153	STR60 QF	118
PUSHBAR-H	187	SUBY	166
PUSHBAR-L	187	SWING40	153
QUICK-FIX	179	SWITCHSTONE-STD	61
RADIO	217	TC	211
RAIL-FIT	202	TCO-SCR	212
RHINO	25	TCO-STD	211
RHINODRILL	178	TCO-WLD	212
ROLLTOP	203	TCR	211
S-MAG	57	TIGER	19
SABO	168	TIGERDRILL	178
SAKLQF	113	TRICONE	45
SAMSON-2	23	TT-BM3S	66
SB	200	TT-CL2	67
SE	111	TT-DM3	66
SECUNUT	207	TT-FC2	67
SEH	111	TT-FO2	67
SERVAL	28	TT-MM3S	67
SF	115	TT-SDM4	66
SFKB	120	TT-SM4S	66
SFKI	121	TTEC	65
SFKM	122	TWIST40	88
SFKO-V	127	U-SAFE	210
SFKO	121	UNDER-GATE CATCHER	173
SFKP	120	UNILEC	123
SFKU-V	127	VALENTINO	76
SFKU	122	VENUS-ADAPTERPLATE	197
SH-KLQF	113	VENUS-ARM-A	36
SHELL-LION	198	VENUS-ARM-G	36
SHELL-RHINO-VTC	199	VENUS-ARM-S	36
SHIELD	195	VENUS-RAIL	202
SHIELDLINE	195	VENUS	37
SHKC	125	VERA	101
SHKM	126	VERTICLOSE-2-WALL	26
SHKW	126	VERTICLOSE-2	27
SHROUD-LA	183	VINCI	78
SHROUD-LF	183	VITA	102
SHROUD-LO	183	VOLTA	77
SHROUD-SA	182	VSA / VSF	164
SIXTYLOCK	96	WALL-FIX	179
SIXTYSET	98		
SKRZ	114		



LOCINOX USA LLC

460-464 Windy Point Drive
Glendale Heights, IL 60139

T. 877- LOCINOX
F. 708-579-0978

salesusa@locinox.com
www.locinoxusa.com



Product Catalog - en-US